



**THIS PLAN TO REMAIN
ON CONSTRUCTION SITE
AT ALL TIMES**

Please call 435-563-6507 x 25 a minimum of
24 hours prior to the following inspections:


- Footing
- Foundation
- Underground plumbing / Mechanical
- Rough Frame / mechanical / plumbing / electrical
- Insulation
- Water Barrier / flashing
- Final

For Public Works / Sewer connection, sidewalks and
approaches call Brett 435-563-0179

Construction of this structure shall conform to
the currently adopted edition of the Building or
Residential Code, Mechanical Code, Plumbing
Code, and the Electrical Code

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

This drawing, the design it depicts, and the information contained herein are the exclusive property of Chris Field and may not be copied or reproduced, without the written permission of Chris Field.

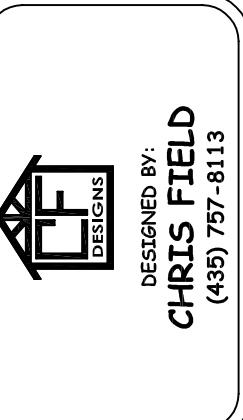

BASEMENT: 1676 sf
MAIN FLOOR: 1676 sf
2nd FLOOR: 1392 sf
TOTAL: 4744 sf
GARAGE: 1032 sf

PROJECT: **MITCH & LORRIE HIBBARD RESIDENCE**
LOCATION: **HYDE PARK, UTAH**

06/18/23

A0

GENERAL NOTES:

COMPLIANCE WITH CODES AND ORDINANCES GOVERNING THE WORK SHALL BE MADE AND ENFORCED BY THE GENERAL CONTRACTOR. GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION.

NOTE THAT ALL WRITTEN DIMENSIONS TAKE PRECEDENCE OVER SCALE.

MANUFACTURER'S SPECIFICATIONS FOR INSTALLATION OF MATERIALS SHALL BE FOLLOWED.

WORKMANSHIP THROUGHOUT SHALL BE OF THE BEST QUALITY OF THE TRADE INVOLVED AND THE GENERAL CONTRACTOR SHALL COORDINATE THE WORK OF THE VARIOUS TRADES TO EXPEDITE THE JOB IN A SMOOTH AND CONTINUOUS PROCESS.

EMERGENCY FLOOR DRAINS AT WATER HEATERS, LAUNDRIES, GARAGES ECT. REQUIRE A TRAP SEAL PRIMER OR DEEP SEAL TRAP. (UTAH STATE AMENDMENT TO IPC SEC. 1002.4.1)

WINDOW WELLS REQUIRED FOR EMERGENCY ESCAPE AND RESCUE SHALL HAVE HORIZONTAL DIMENSIONS THAT ALLOW THE DOOR OR WINDOW OF THE EMERGENCY ESCAPE AND RESCUE OPENING TO BE FULLY OPENED. THE HORIZONTAL DIMENSIONS OF THE WINDOW WELL SHALL PROVIDE A MINIMUM NET CLEAR OF 9 sq. ft. WITH MINIMUM HORIZONTAL PROJECTION AND WIDTH OF 36". WINDOW WELLS WITH A VERTICAL DEPTH GREATER THEN 44 INCHES BELOW GRADE SHALL BE EQUIPPED WITH A PERMANENTLY AFFIXED LADDER OR STEPS USABLE WITH THE WINDOW IN THE FULLY OPEN POSITION.

MECHANICAL CONTRACTOR TO PROVIDE COMBUSTION AIR TO FURNACE AREA IN ACCORDANCE WITH LOCAL NATURAL GAS SPECIFICATIONS. COMBUSTION AIR TO BE BROUGHT INTO HOUSE FROM OUTSIDE. 2-DUCTS PROVIDED 1) PLACED AT 12" ABOVE FLOOR, AND 1) PLACED AT 12" BELOW CEILING. COMBUSTION AIR SHALL BE SUPPLIED BY (2) VERTICAL OPENINGS, EACH WITH 1 sq. in. PER 4,000 BTU/h OF THE TOTAL INPUTTING RATING OF ALL APPLICATIONS WITHIN THE SPACE. OR COMBUSTION AIR SHALL BE SUPPLIED BY (2) HORIZONTAL OPENINGS, EACH WITH 1 sq. in. per 2,000 BTU/h OF THE TOTAL IMPUTE RATING OF ALL APPLIANCES WITH IN THE SPACE.

ATTIC VENTILATION NOTES:

ATTIC ACCESS 22" x 30" WITH SWITCHED LIGHT IN ATTIC SPACE.

THE NET FREE VENTILATION AREA SHALL NOT BE LESS THEN 1/300th PROVIDED THAT AT LEAST 50% OF THE AREA IS PROVIDED BY VENTILATORS LOCATED IN THE UPPER PORTION OF THE SPACE TO BE VENTILATED, THE OTHER TO BE PROVIDED BY VENTED SOFFIT SYSTEM.

ELECTRICAL NOTES:

ARCH-FAULT CIRCUIT INTERRUPTERS ARE REQUIRED ON ALL BRANCH CIRCUITS THAT SUPPLY 125-VOLT, SINGLE PHASE, 12- AND 20-AMP RECEPTACLE OUTLETS IN DWELLING UNIT BEDROOMS (NEC art.210-12)

OUTLETS IN GARAGE ARE TO BE LOCATED A MINIMUM OF 18" ABOVE THE FINISHED FLOOR AND IS ALSO TO BE GFI PROTECTED (IRC SEC. 3802.2)

FIRE WARNING SYSTEM NOTES:

R317.1 SINGLE AND MULTIPLE STATION SMOKE ALARMS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS. IN EACH SEPARATE SLEEPING AREA IN THE IMMEDIATE VACANTLY OF THE BEDROOMS. ON EACH ADDITIONAL STORY OF THE DWELLING, INCLUDING BASEMENTS AND CELLARS. WHEN MORE THAN ONE SMOKE ALARM IS REQUIRED TO BE INSTALLED WITH IN A DWELLING UNIT THE ALARM DEVICES SHALL BE INTERCONNECTED IN SUCH A MANNER THAT THE ACTUATION WILL ACTIVATE AL ALARMS IN THE INDIVIDUAL UNIT.

ROOF NOTES:

USE SIMPSON H1 OR EQUIVALENT TIES EACH END OF EACH TRUSS.

INSTALL RAFTER HANGERS EACH END OF EACH RAFTER AS PER MANUFACTURER SPECIFICATIONS.

INSTALL SOLID BLOCKING BETWEEN TRUSSED ALONG BEARING WALLS.

INSTALL H16-2 OR EQUIVALENT STRAPS TO EACH END OF GIRDERS.

ALL ICE BARRIER THAT CONSISTS OF AT LEAST TWO LAYERS OF UNDERLAYMENT CEMENTED TOGETHER OR OF A SELFADHERING POLYMER MODIFIED BITUMEN SHEET, SHALL BE USED IN LIEU OF NORMAL UNDERLAYMENT AND EXTEND FROM THE EAVE'S EDGE TO A POINT AT LEAST 24 INCHES INSIDE THE EXTERIOR WALL LINE OF THE BUILDING.

FLOOR JOIST NOTES:

USE SIMPSON CS16 STRAPS 36" LONG 32" O.C. BETWEEN FLOORS CENTER ON RIM JOIST OR SHEET ACROSS RIM WITH 7/16" WAFER. ALL EDGES BLOCKED EXTEND WATER ACROSS GABLE END/WALL FRAMING JOINT.

USE SIMPSON A35 TIES 32" O.C. CANTILEVER JOISTS TO BEARING WALL PLATE.

INSTALL JOIST HANGERS AS PER MANUFACTURE SPECIFICATIONS.

DOUBLE CANTILEVER JOIST UNDER WINDOW AND DOOR TRIMMERS.

STAIR & HANDRAIL NOTES:

HANDRAILS ARE REQUIRED AT ALL STAIRWAYS HAVING MORE THEN 2 RISERS. HANDRAILS SHALL BE PLACED NOT LESS THEN 34" AND NOT MORE THEN 38" HIGH.

GUARDRAILS (36"+) ARE REQUIRED AT ALL LANDINGS, DECKS OR FLOOR LEVELS MORE THEN 30" ABOVE FINISH GRADE.

STAIR RISERS NOT TO EXCEED 7 3/4" HIGH WITH STAIR TREADS TO BE MIN. OF 10" WITH NO MORE THE 3/8" VARIATION.

A NOSING NOT LESS THEN 3/4" BUT NOT MORE THEN 1 1/4" INCHES SHALL BE PROVIDED ON STAIRWAYS WITH SOLID RISERS. IF THE TREAD IS 11" OR DEEPER, NO NOSING IS REQUIRED.

PROVIDE HEADROOM CLEARANCE OF 6'-8" MIN.

BALLISTERS FOR HANDRAILS AND GUARDRAILS SHALL BE SPACED NO MORE THEN 4" APART AND SHALL NOT HAVE LADDER EFFECT.

BATHROOM NOTES:

SHOWER COMPARTMENTS SHALL HAVE AT LEAST 900 sq. in. OF FLOOR AREA AND BE SUFFICIENT SIZE TO INSCRIBE A CIRCLE WITH A DIAMETER NOT LESS THE 30". HINGED SHOWER DOORS SHALL OPEN OUTWARD. THE WALL AREA ABOVE BUILT -IN TUBE HAVING INSTALLED SHOWER HEADS AND IN-SHOWER COMPONENTS SHALL BE CONSTRUCTED AS PER SECTION R702.4. SUCH WALLS SHALL FORM A WATERTIGHT JOINT WITH EACH OTHER AND WITH EITHER THE TUB, RECEPTOR, OR SHOWER FLOOR. BATHROOMS, WATER CLOSET COMPARTMENTS, AND OTHER SIMILAR ROOMS SHALL BE PROVIDED WITH AGGREGATE GLAZING AREA IN WINDOWS OF NOT LESS THE 3 sq. ft., ONE HALF OF WHICH MUST BE OPENABLE. (IF NO WINDOWS, A MECHANICAL VENTILATION SYSTEM SHALL BE REQUIRED. THE MINIMUM VENTILATION RATES SHALL BE 50 cfm. FOR CONTINUOUS VENTILATION.)

FIRE PROTECTION NOTES:

PROVIDE 5/8" TYPE "x" GYP. BOARD ON ALL WALLS AND CEILINGS OF GARAGE, NAIL @ 6" O.C. ALL BEAMS AND STRUCTURE MEMBERS SHALL BE PROTECTED WITH 5/8" GYP. BOARD WITH SELF CLOSER. DOOR BETWEEN GARAGE AND HOUSE SHALL BE SOLID CORE WOOD OR "B" LABELED DOOR NOT LESS THAN 1 3/4" w/ SELF CLOSER. PROTECT ENCLOSED USABLE SPACE UNDER STAIRS WITH 5/8" GYP. BOARD FIRE BLOCKING AN STUD CAVITIES THAT ARE GREATER THE 8'-0"

BRICK VENEER NOTES:

LAP ALL JOINTS IN THE #9 HORIZONTAL JOINT REINFORCEMENT BY MINIMUM OF 2".

EACH GALVANIZED. BRICK TIE SHALL SUPPORT NOT MORE THEN 2 SQUARE FEET. ATTACH BRICK TIES TO WALL STUDS.

PLACE BRICK TIES AROUND OPENINGS NOT MORE THEN 3' O.C. AND WITHIN 12 INCHES OF OPENING.

BRICK TIES SHALL BE MECHANICALLY ATTACHED TO HORIZONTAL JOINT REINFORCEMENT.

FOLLOW ALL OTHER REQUIREMENTS FOUND IN IRC SECTION R703.7.2.

EXHAUST SYSTEM NOTES:

DRYER EXHAUST SYSTEMS SHALL CONVEY THE MOISTURE TO THE OUTDOORS AND SHALL TERMINATE ON THE OUTSIDE OF THE BUILDING. SCREENS SHALL NO BE INSTALLED ON THE DUCT TERMINAL. DUCTS SHALL HAVE A BACK DRAFT DAMPER. THE MAXIMUM LENGTH OF CLOTHES DRYER EXHAUST DUCT SHALL NOT EXCEED 25 FEET FROM DRYER LOCATION TO THE WALL OR ROOF TERMINATION. THE MAXIMUM LENGTH OF THE DUCTS SHALL BE REDUCED 2.5 FEET FOR EACH 45 DEGREE BEND AND 5 FEET FOR EACH 90 DEGREE BEND.

FRAMING & SHEATHING NOTES:

ALL STUDS TO BE MAX. 16" O.C. FLOOR SHEATHING SHALL BE 3/4" T&G APA RATED 40/20 CDX. SHEATHING NAILED WITH 8d NAILS 6" O.C. AT ALL PANEL EDGES. SUPPORTED EDGES, AND ALL BLOCKING. USE 8d NAILS 10" O.C. IN FIELD. NAILS SHALL BE MIN. 1/2" FROM EDGE OF PANEL. LAY SHEATHING WITH FACE GRAIN AT RIGHT ANGLES TO FRAMING AND GLUE WITH GLUE CONFORMING TO APA SPECS. FLOOR JOISTS SHALL BE BLOCKED AT ALL BEARING POINTS. BLOCK ALL HORIZONTAL EDGES OF WALL SHEATHING WITH 2x4 BLOCKING. USE 8d NAILS 6" O.C. EDGES & 10" O.C. FIELD. EXTEND SHEATHING OVER RIM JOIST AND NAIL TO WALL PLATES ABOVE AND BELOW. EXTEND SHEATHING DOWN TO SILL PLATE AND NAIL PER SHEAR WALL SCHEDULE.

TYPICAL ROOF SHEATHING SHALL BE 7/16" RATED OSB SHEATHING NAILED WITH 8d NAILS 6" O.C. AT PANEL EDGES. SUPPORTED EDGES, AND ALL BLOCKING WITH 8d NAILS. 12" O.C. ALONG INTERMEDIATE FRAMING MEMBERS. UNLESS OTHERWISE NOTED USE (2)2x10 WITH PLY FILLER FOR BEARING HEADER.

EXCEPT WHERE OTHERWISE NOTED. CONNECT ALL WOOD TO CONCRETE. WOOD TO STEEL AND WOOD TO WOOD (EXCEPT STUD TO PLATES WITH SIMPSON METAL CONNECTORS. SOLID 2" NOMINAL BLOCKING SHALL BE PROVIDED AT ENDS OR POINTS OF SUPPORT OF ALL WOOD JOISTS AND TRUSSES. INSTALL JOIST, RAFTER, AND BEAM HANGERS & POST CAPS PER MANUFACTURERS SPECIFICATIONS.

MINIMUM NAILING SHALL BE AS PER SHEAR WALLS SCHEDULE. STAPLES CAN BE SUBSTITUTED FOR NAILS AT AL RATE EQUAL TO LOAD VALUES PROVIDED BY 2000 IRC STANDARD OR HALF NAIL SPACING. PROVIDE SOLID BEARING THROUGH FLOOR SYSTEMS AND POSTS DOWN TO CONCRETE FOOTING.

CONTRACTOR AND ALL SUB-CONTRACTORS SHALL FOLLOW ALL STANDARD BUILDING CODES, PRACTICES AND REQUIREMENTS AS LISTED IN THE 2000 IRC.

USE BALLOON FRAMING METHOD TO CONNECT FLOOR SYSTEMS IN SPLIT LEVEL DESIGNS. USE DOUBLE FLOOR JOIST UNDER EACH END OF SHEAR WALLS OVER CANTILEVER FLOOR SECTIONS.

INSTALL JOIST AND RAFTER HANGERS AS PER MANUFACTURERS SPECIFICATIONS. UNLESS OTHERWISE NOTED CONNECT ALL HEADER TO STUD/POST. POST TO FLOOR, BEAM TO BEAM, RAFTER TO WALL OR TRUSS, ETC. WITH APPROPRIATE METAL CONNECTORS.

CONNECT EACH RAFTER OR TRUSS TO BEARING WALLS USING SIMPSON H2.5 OR EQUIVALENT CONNECTORS CONNECT EACH CANTILEVER FLOOR JOIST TO BEARING WALLS USING SIMPSON A35 OR EQUIVALENT.

TABLE OF CONTENTS	
COVER SHEET	A1
PLOT PLAN	A2
BASEMENT FLOOR PLAN	A3
BASEMENT ELECTRICAL	A4
MAIN FLOOR PLAN	A5
MAIN FLOOR ELECTRICAL	A6
2nd FLOOR PLAN	A7
2nd FLOOR ELECTRICAL	A8
WEST ELEVATION	A9
EAST ELEVATION	A10
NORTH ELEVATION	A11
SOUTH ELEVATION	A12
ROOF PLAN, SECTION & DETAIL	A13

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

This drawing, the design it depicts, and the information contained herein are the exclusive property of Chris Field and may not be copied or reproduced, without the written permission of Chris Field.



DESIGNED BY:
CHRIS FIELD
(435) 797-8113

BASEMENT: 1676 sf
MAIN FLOOR: 1676 sf
2nd FLOOR: 1392 sf
TOTAL: 4744 sf
GARAGE: 1032 sf


PROJECT: **MITCH & LORRIE HIBBARD RESIDENCE**

LOCATION: **HYDE PARK, UTAH**

COVER SHEET

06/18/23

A1

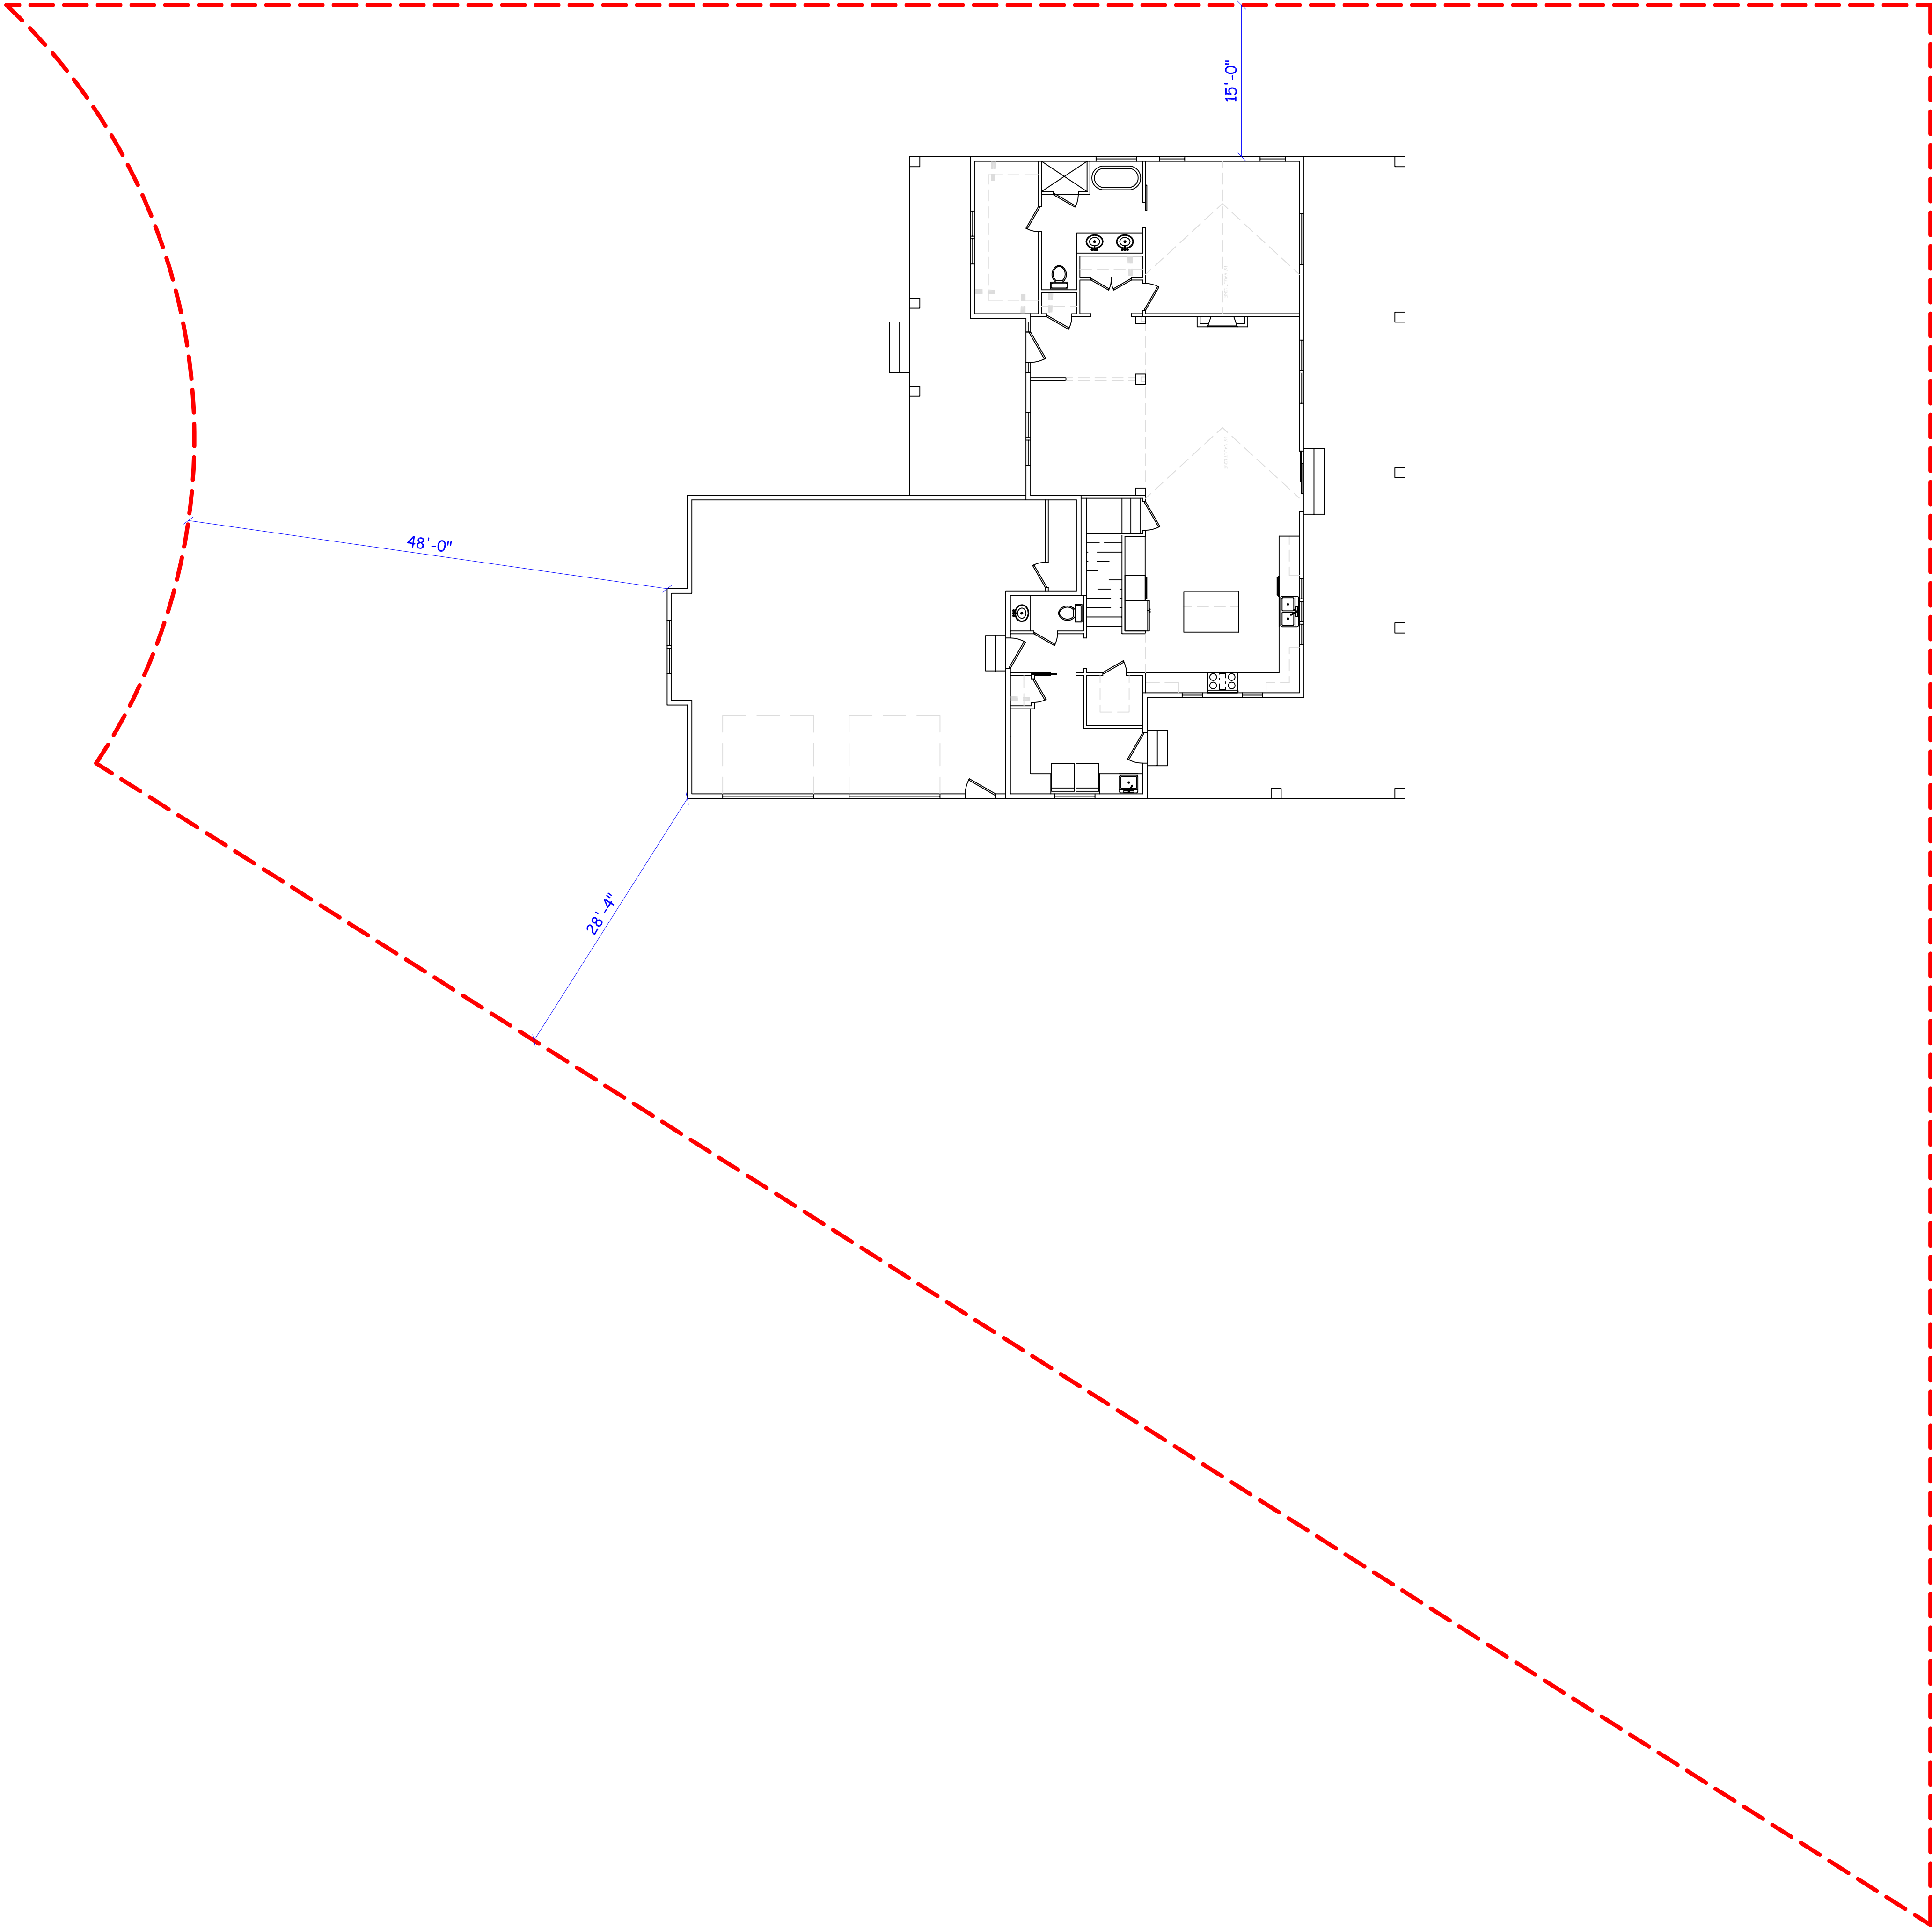

IMPORTANT! Identify ALL PROPERTY CORNERS with survey markers in place. Make sure they are secure & visible for inspectors. Your inspection may be rescheduled if corners are not specified _____ (initials)

If the contours of this property require retaining walls, an engineered design will be required in accordance with IRC Section 404

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

This drawing, the design it depicts, and the information contained herein are the exclusive property of Chris Field and may not be copied or reproduced, without the written permission of Chris Field.

PROJECT: MITCH & LORRIE HIBBARD RESIDENCE

LOCATION: HYDE PARK, UTAH

06/18/23


SCALE: 1/4"

PLOT PLAN

A2

DESIGNED BY: CHRIS FIELD
(435) 737-8113

BASEMENT: 1676 sf
MAIN FLOOR: 1676 sf
2nd FLOOR: 1392 sf
TOTAL: 4744 sf
GARAGE: 1032 sf

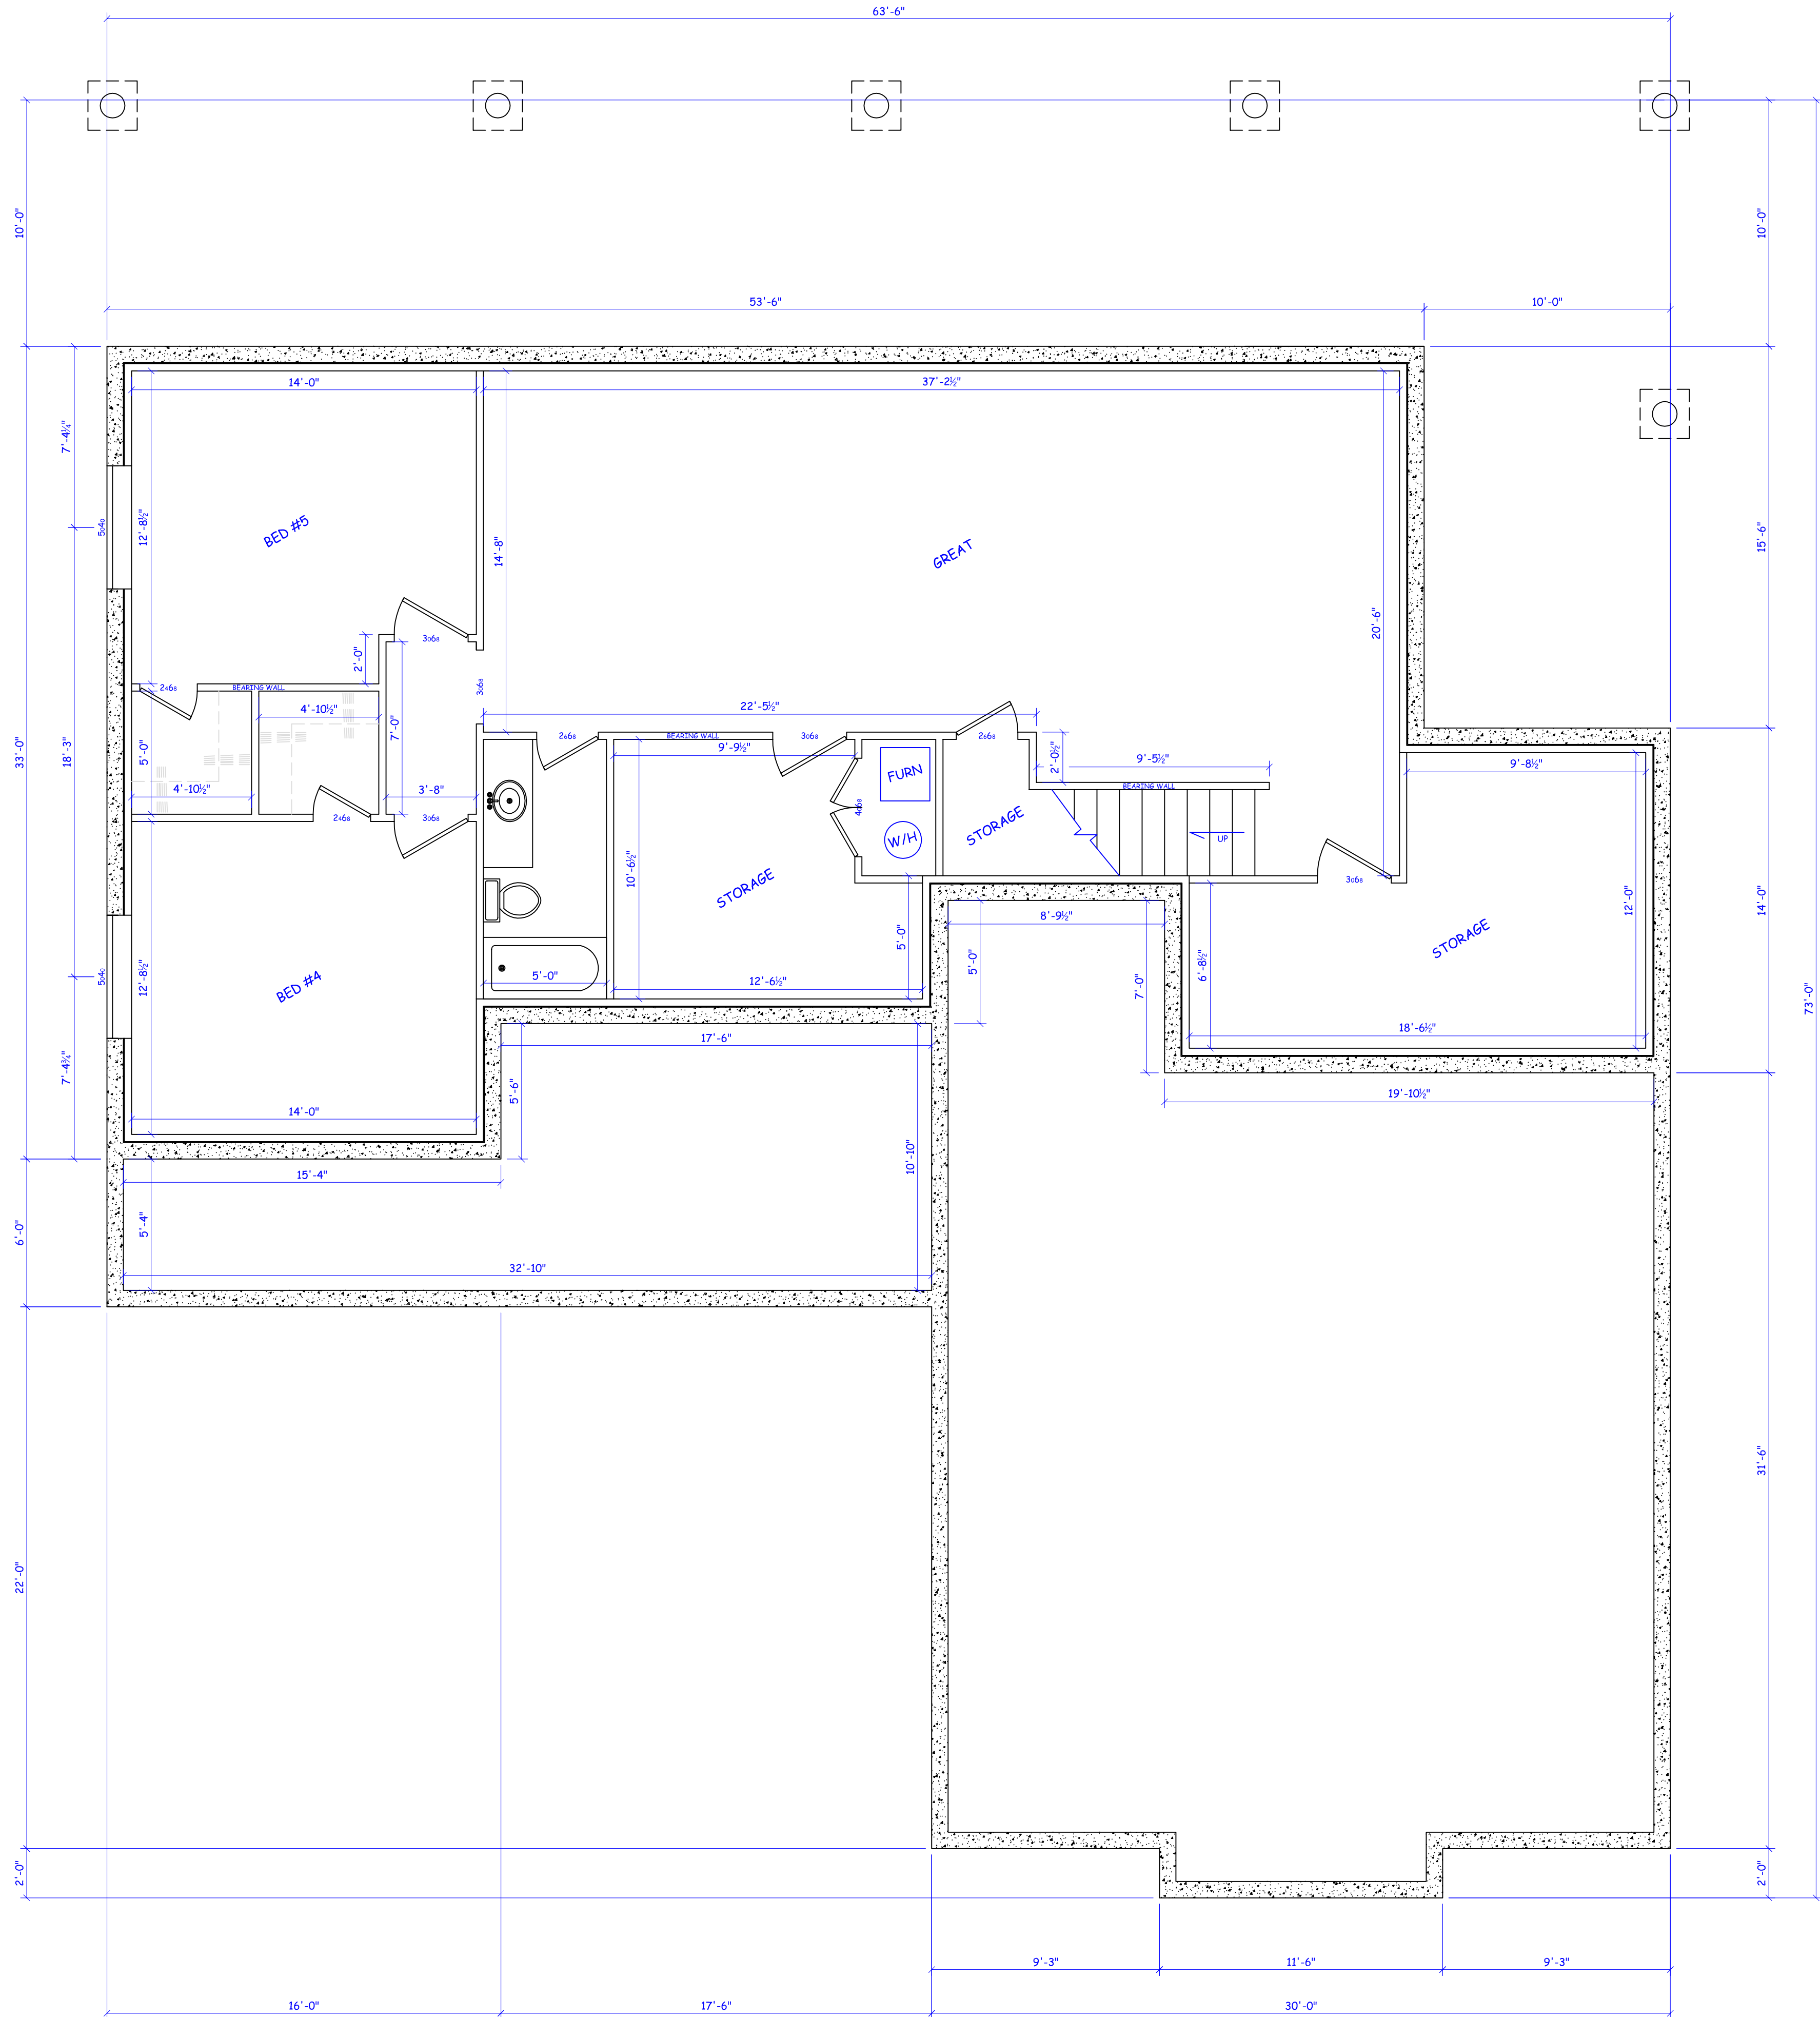

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

This drawing, the design it depicts, and the information contained herein are the exclusive property of Chris Field and may not be copied or reproduced, without the written permission of Chris Field.

PROJECT: **MITCH & LORRIE HIBBARD RESIDENCE**

LOCATION: **HYDE PARK, UTAH**

BASEMENT
FLOOR
PLAN

06/18/23


SCALE: 1/4"

A3

DESIGNED BY:
CHRIS FIELD
(435) 737-8113

BASEMENT: 1676 sf
MAIN FLOOR: 1676 sf
2nd FLOOR: 1392 sf
TOTAL: 4744 sf


GARAGE: 1032 sf

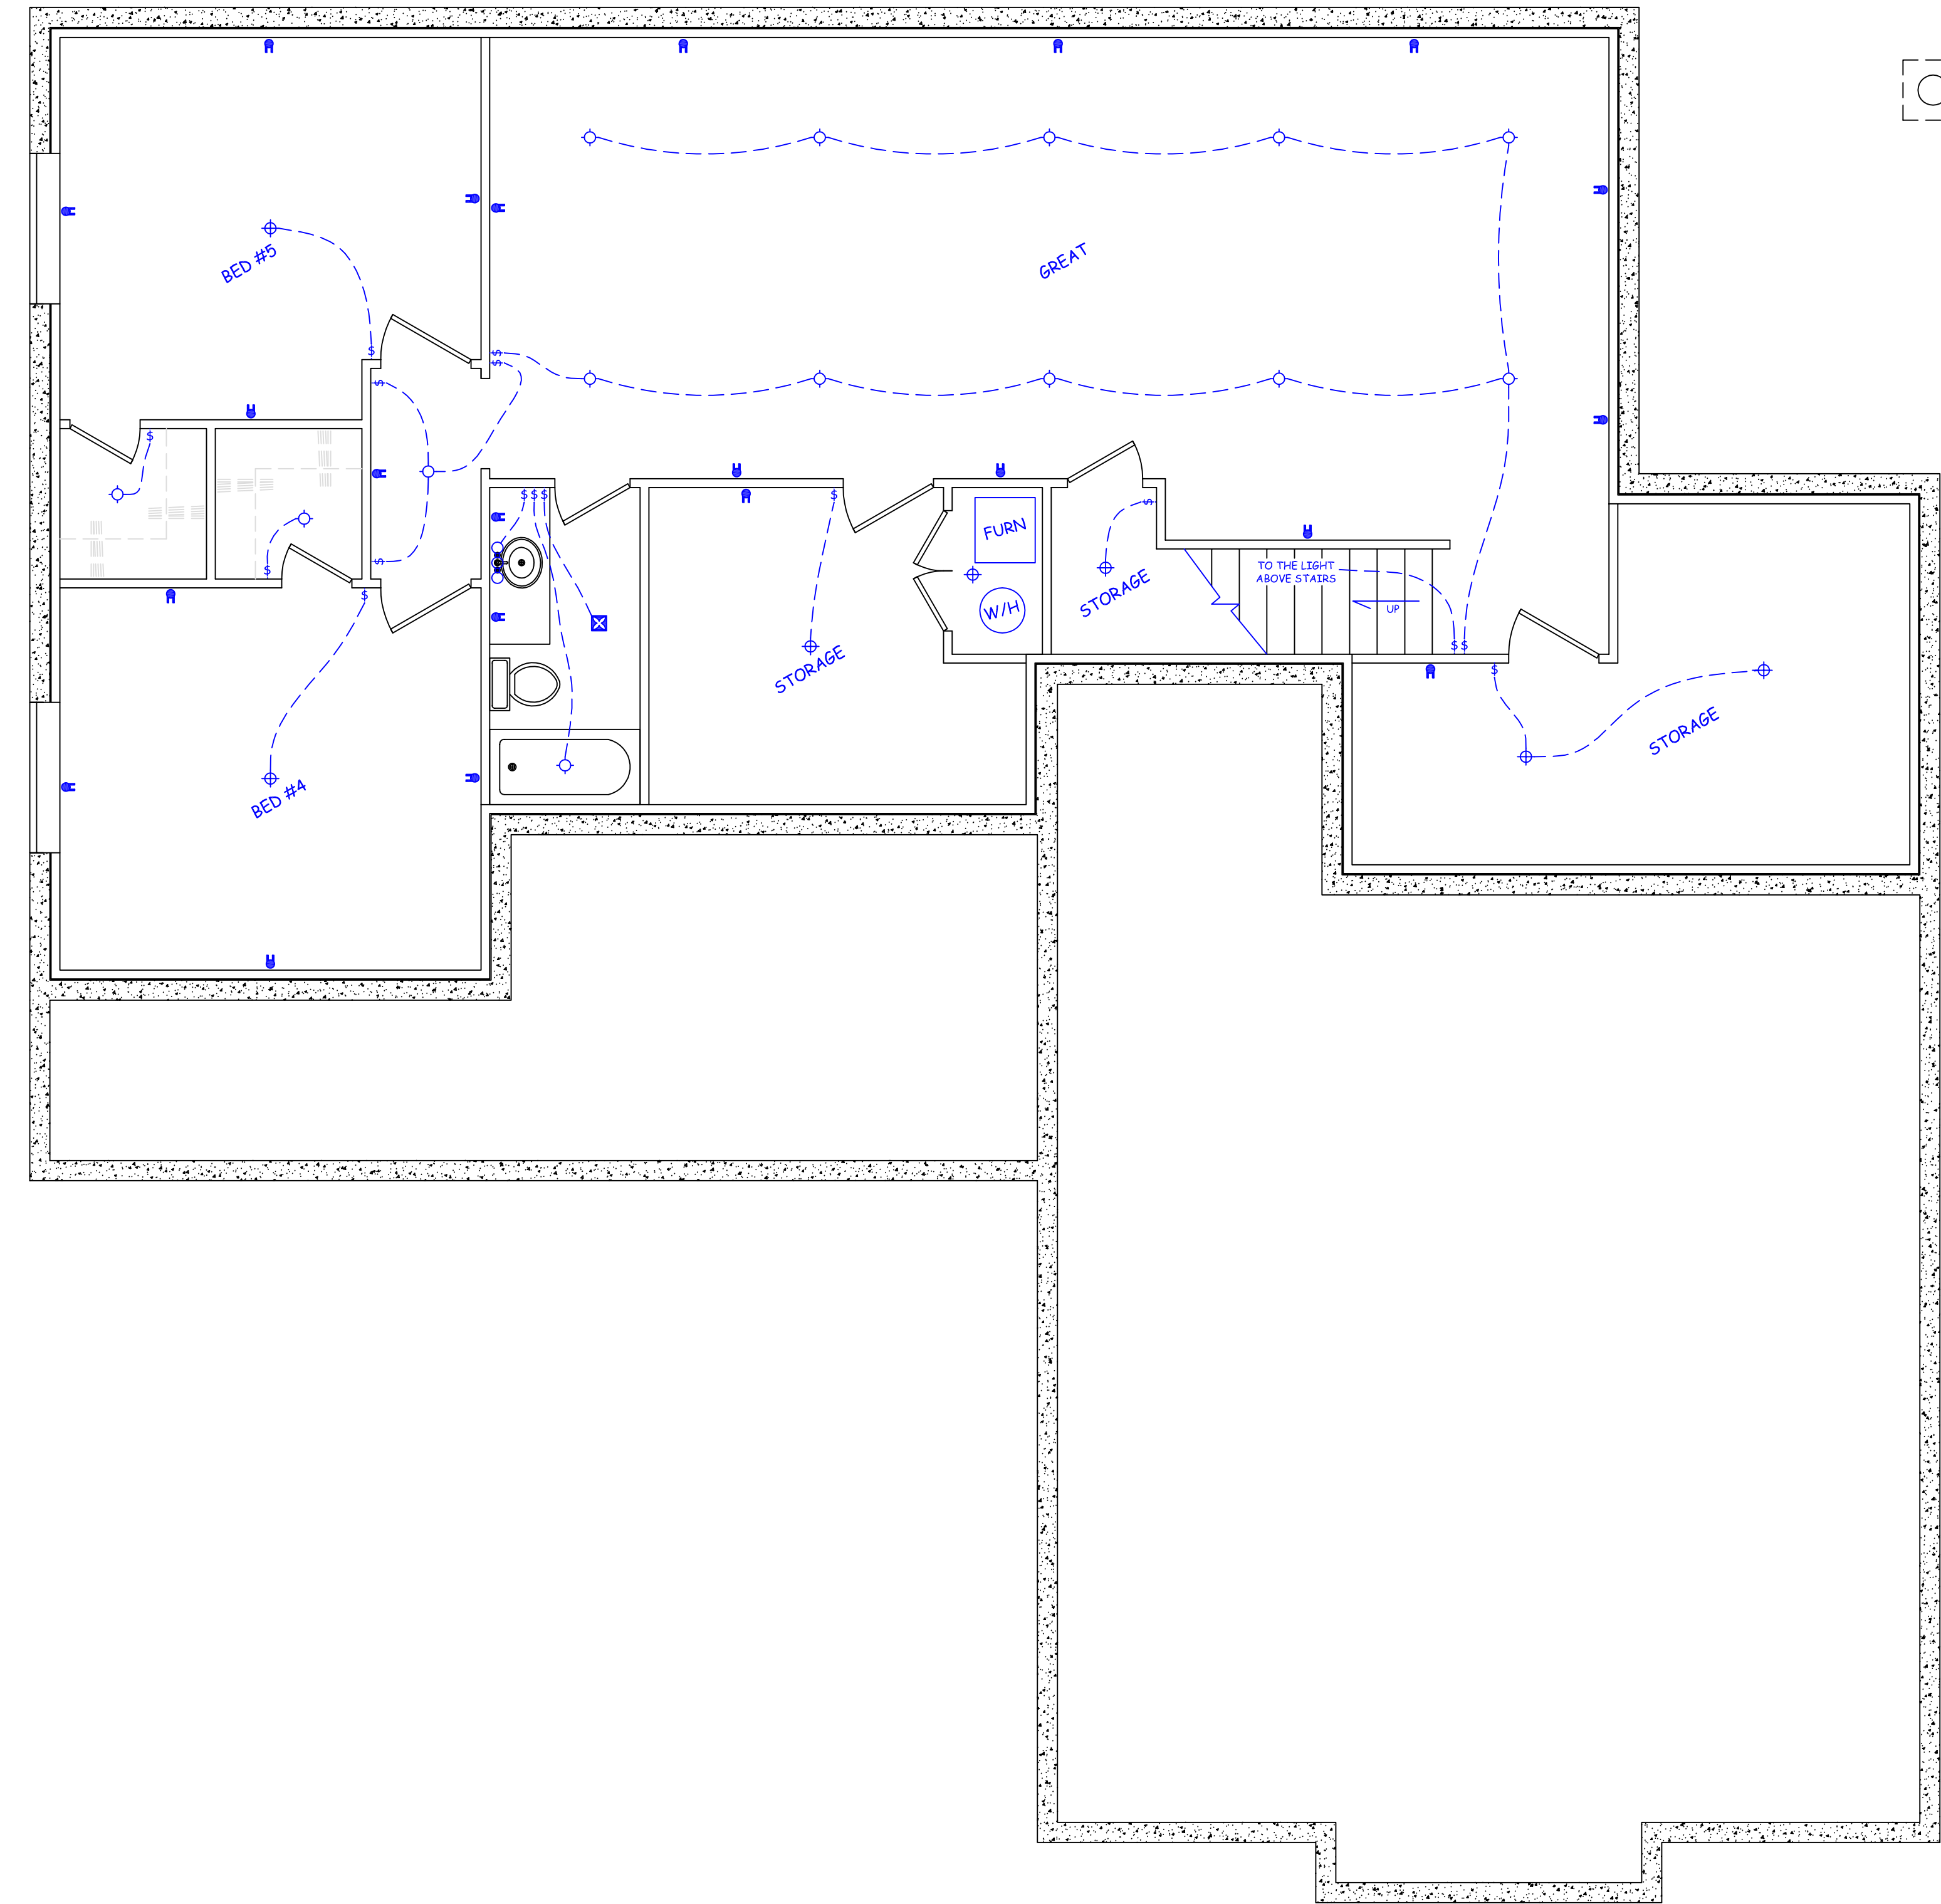

ELECTRICAL SYMBOLS	
BATH FAN	⊠
LIGHT-FLUSHMOUNT	⊕
LIGHT-RECESSED	⊙
LIGHT-STRIP	○○○
LIGHT-WALL MOUNT	⊙
PLUG - 110v	⊕
PLUG - 220	⊕
SWITCH	⊕

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

This drawing, the design it depicts, and the information contained herein are the exclusive property of Chris Field and may not be copied or reproduced, without the written permission of Chris Field.



DESIGNED BY:
CHRIS FIELD
(435) 797-8113

BASEMENT: 1676 sf
MAIN FLOOR: 1676 sf
2nd FLOOR: 1392 sf
TOTAL: 4744 sf
GARAGE: 1032 sf

PROJECT: **MITCH & LORRIE HIBBARD RESIDENCE**
LOCATION: HYDE PARK, UTAH


BASEMENT
ELECTRICAL
PLAN

06/18/23



SCALE: 1/4"

A4

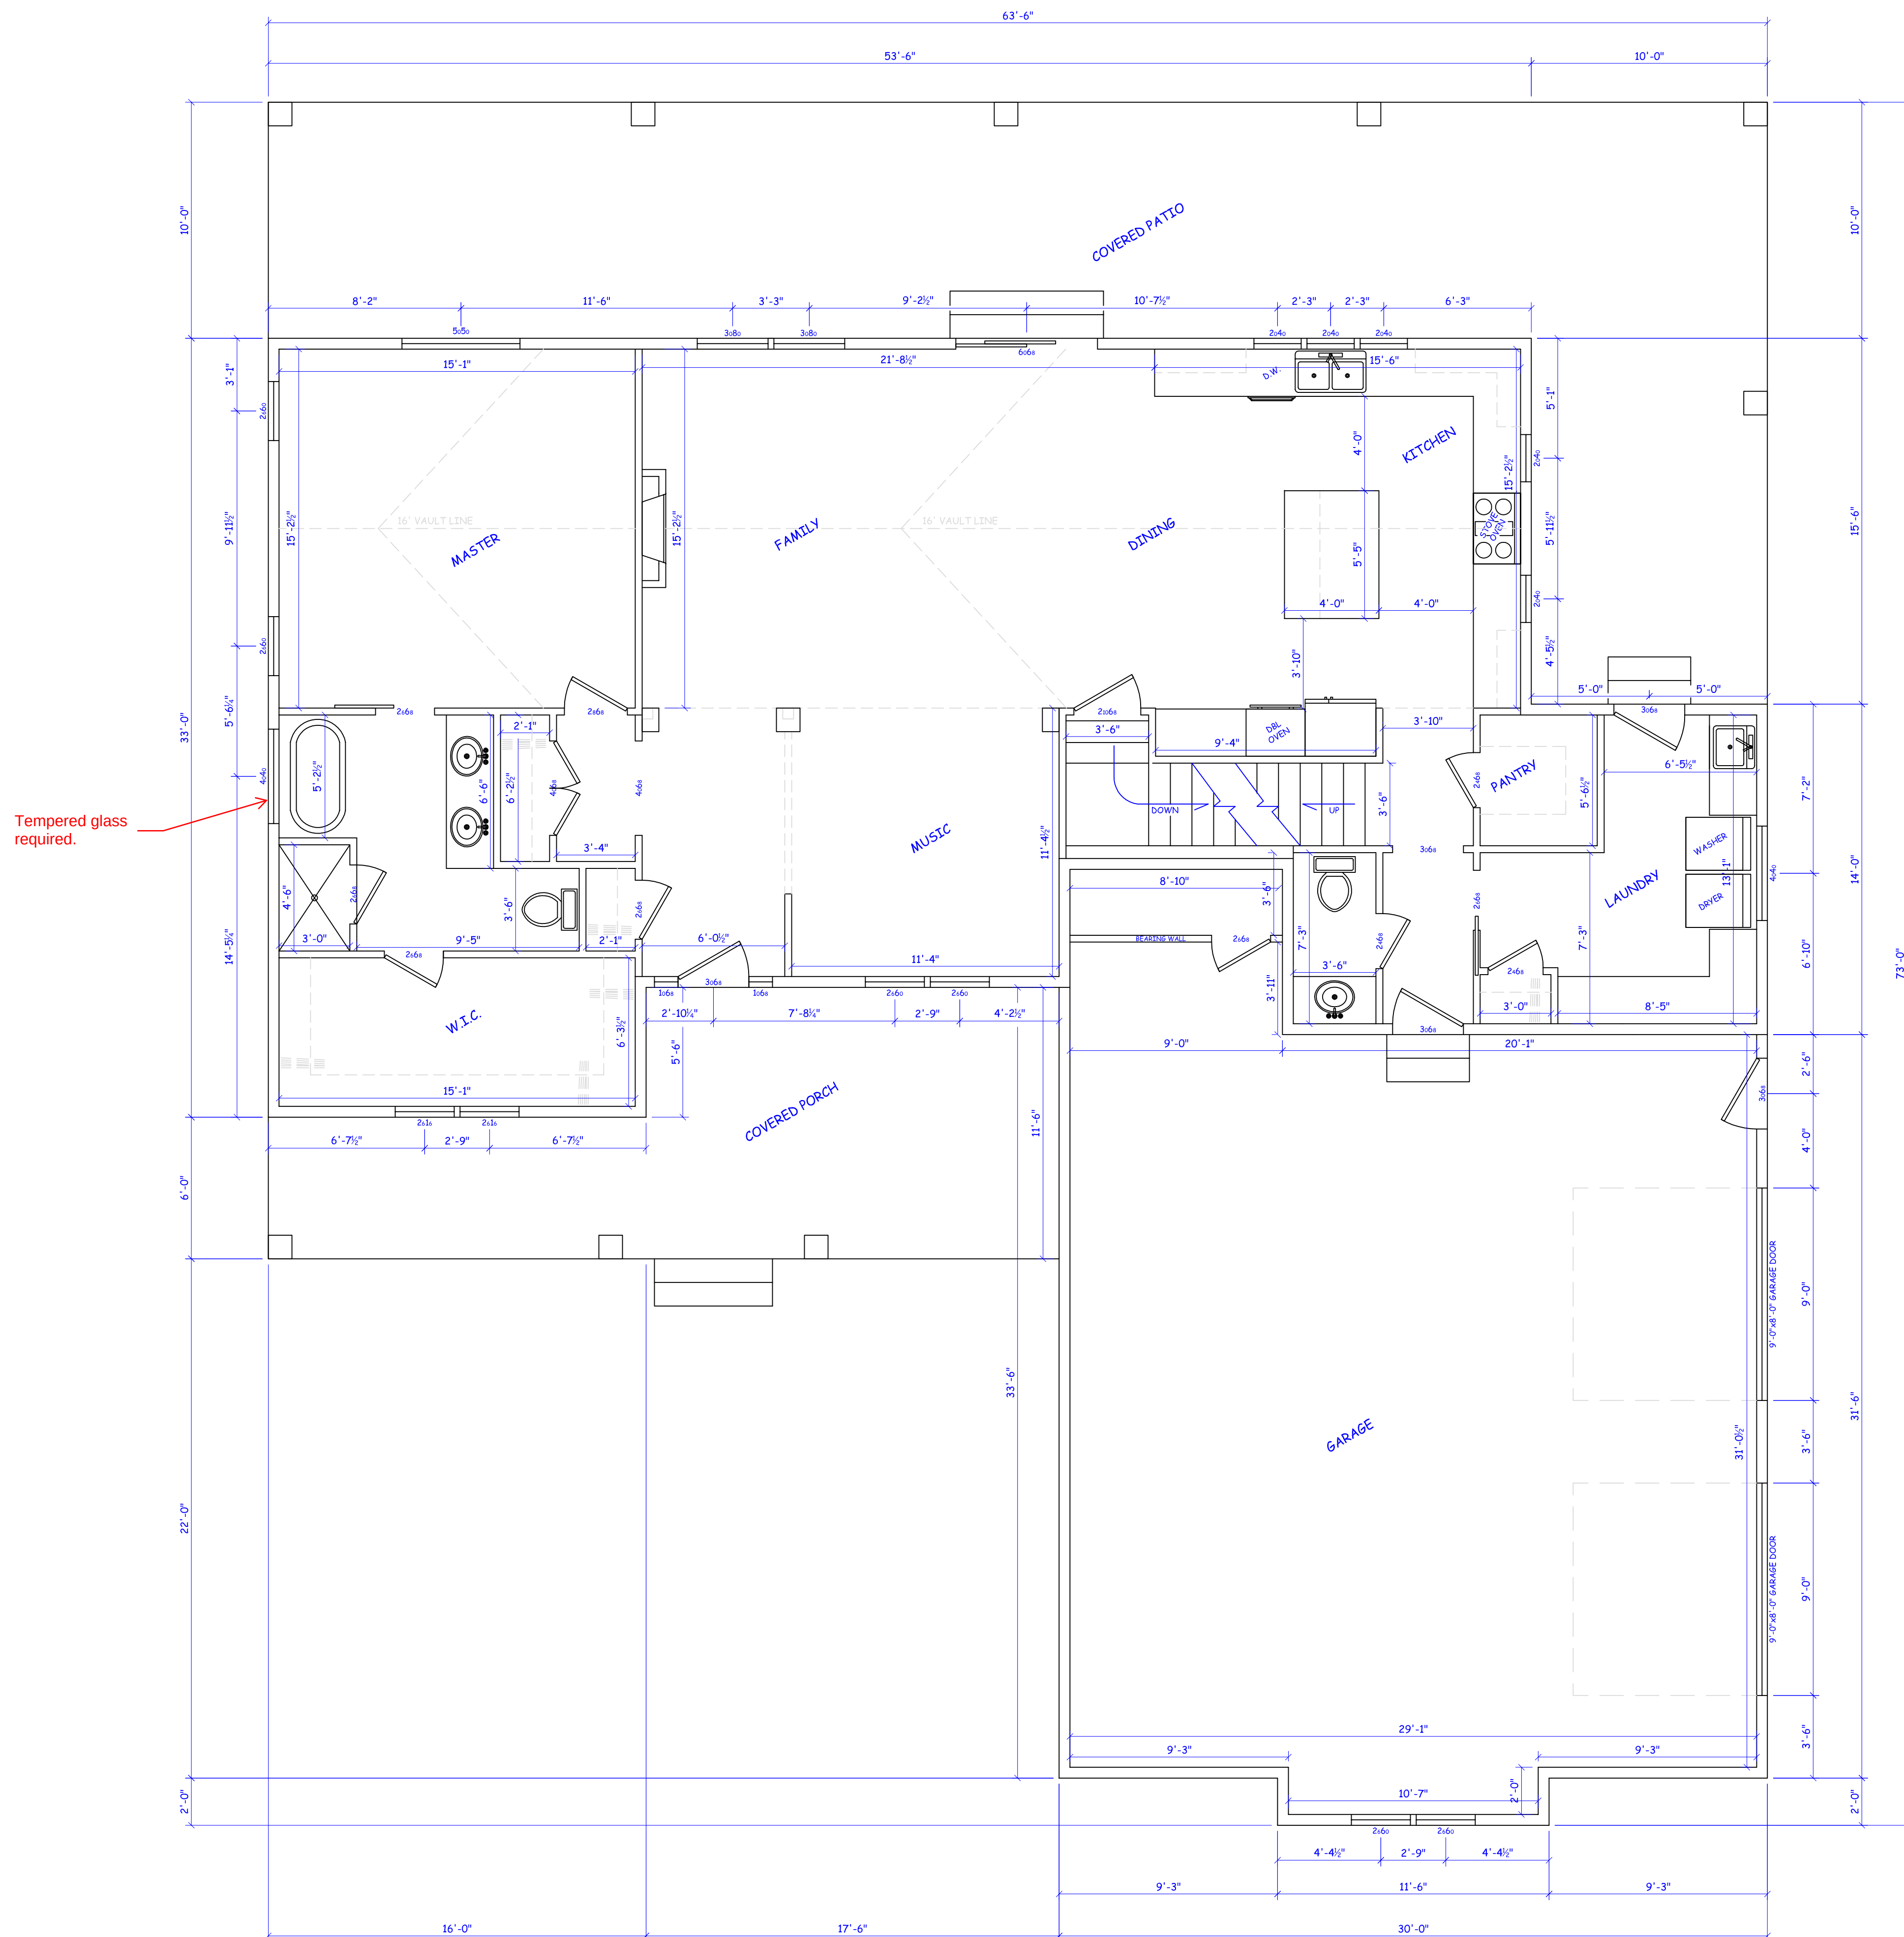

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

This drawing, the design it depicts, and the information contained herein are the exclusive property of Chris Field and may not be copied or reproduced, without the written permission of Chris Field.

PROJECT: **MITCH & LORRIE HIBBARD RESIDENCE**

LOCATION: **HYDE PARK, UTAH**

MAIN
FLOOR
PLAN

06/18/23



SCALE: 1/4"


A5

BASEMENT: 1676 sf
MAIN FLOOR: 1676 sf
2nd FLOOR: 1392 sf
TOTAL: 4744 sf

GARAGE: 1032 sf

DESIGNED BY:
CHRIS FIELD
(435) 757-8113



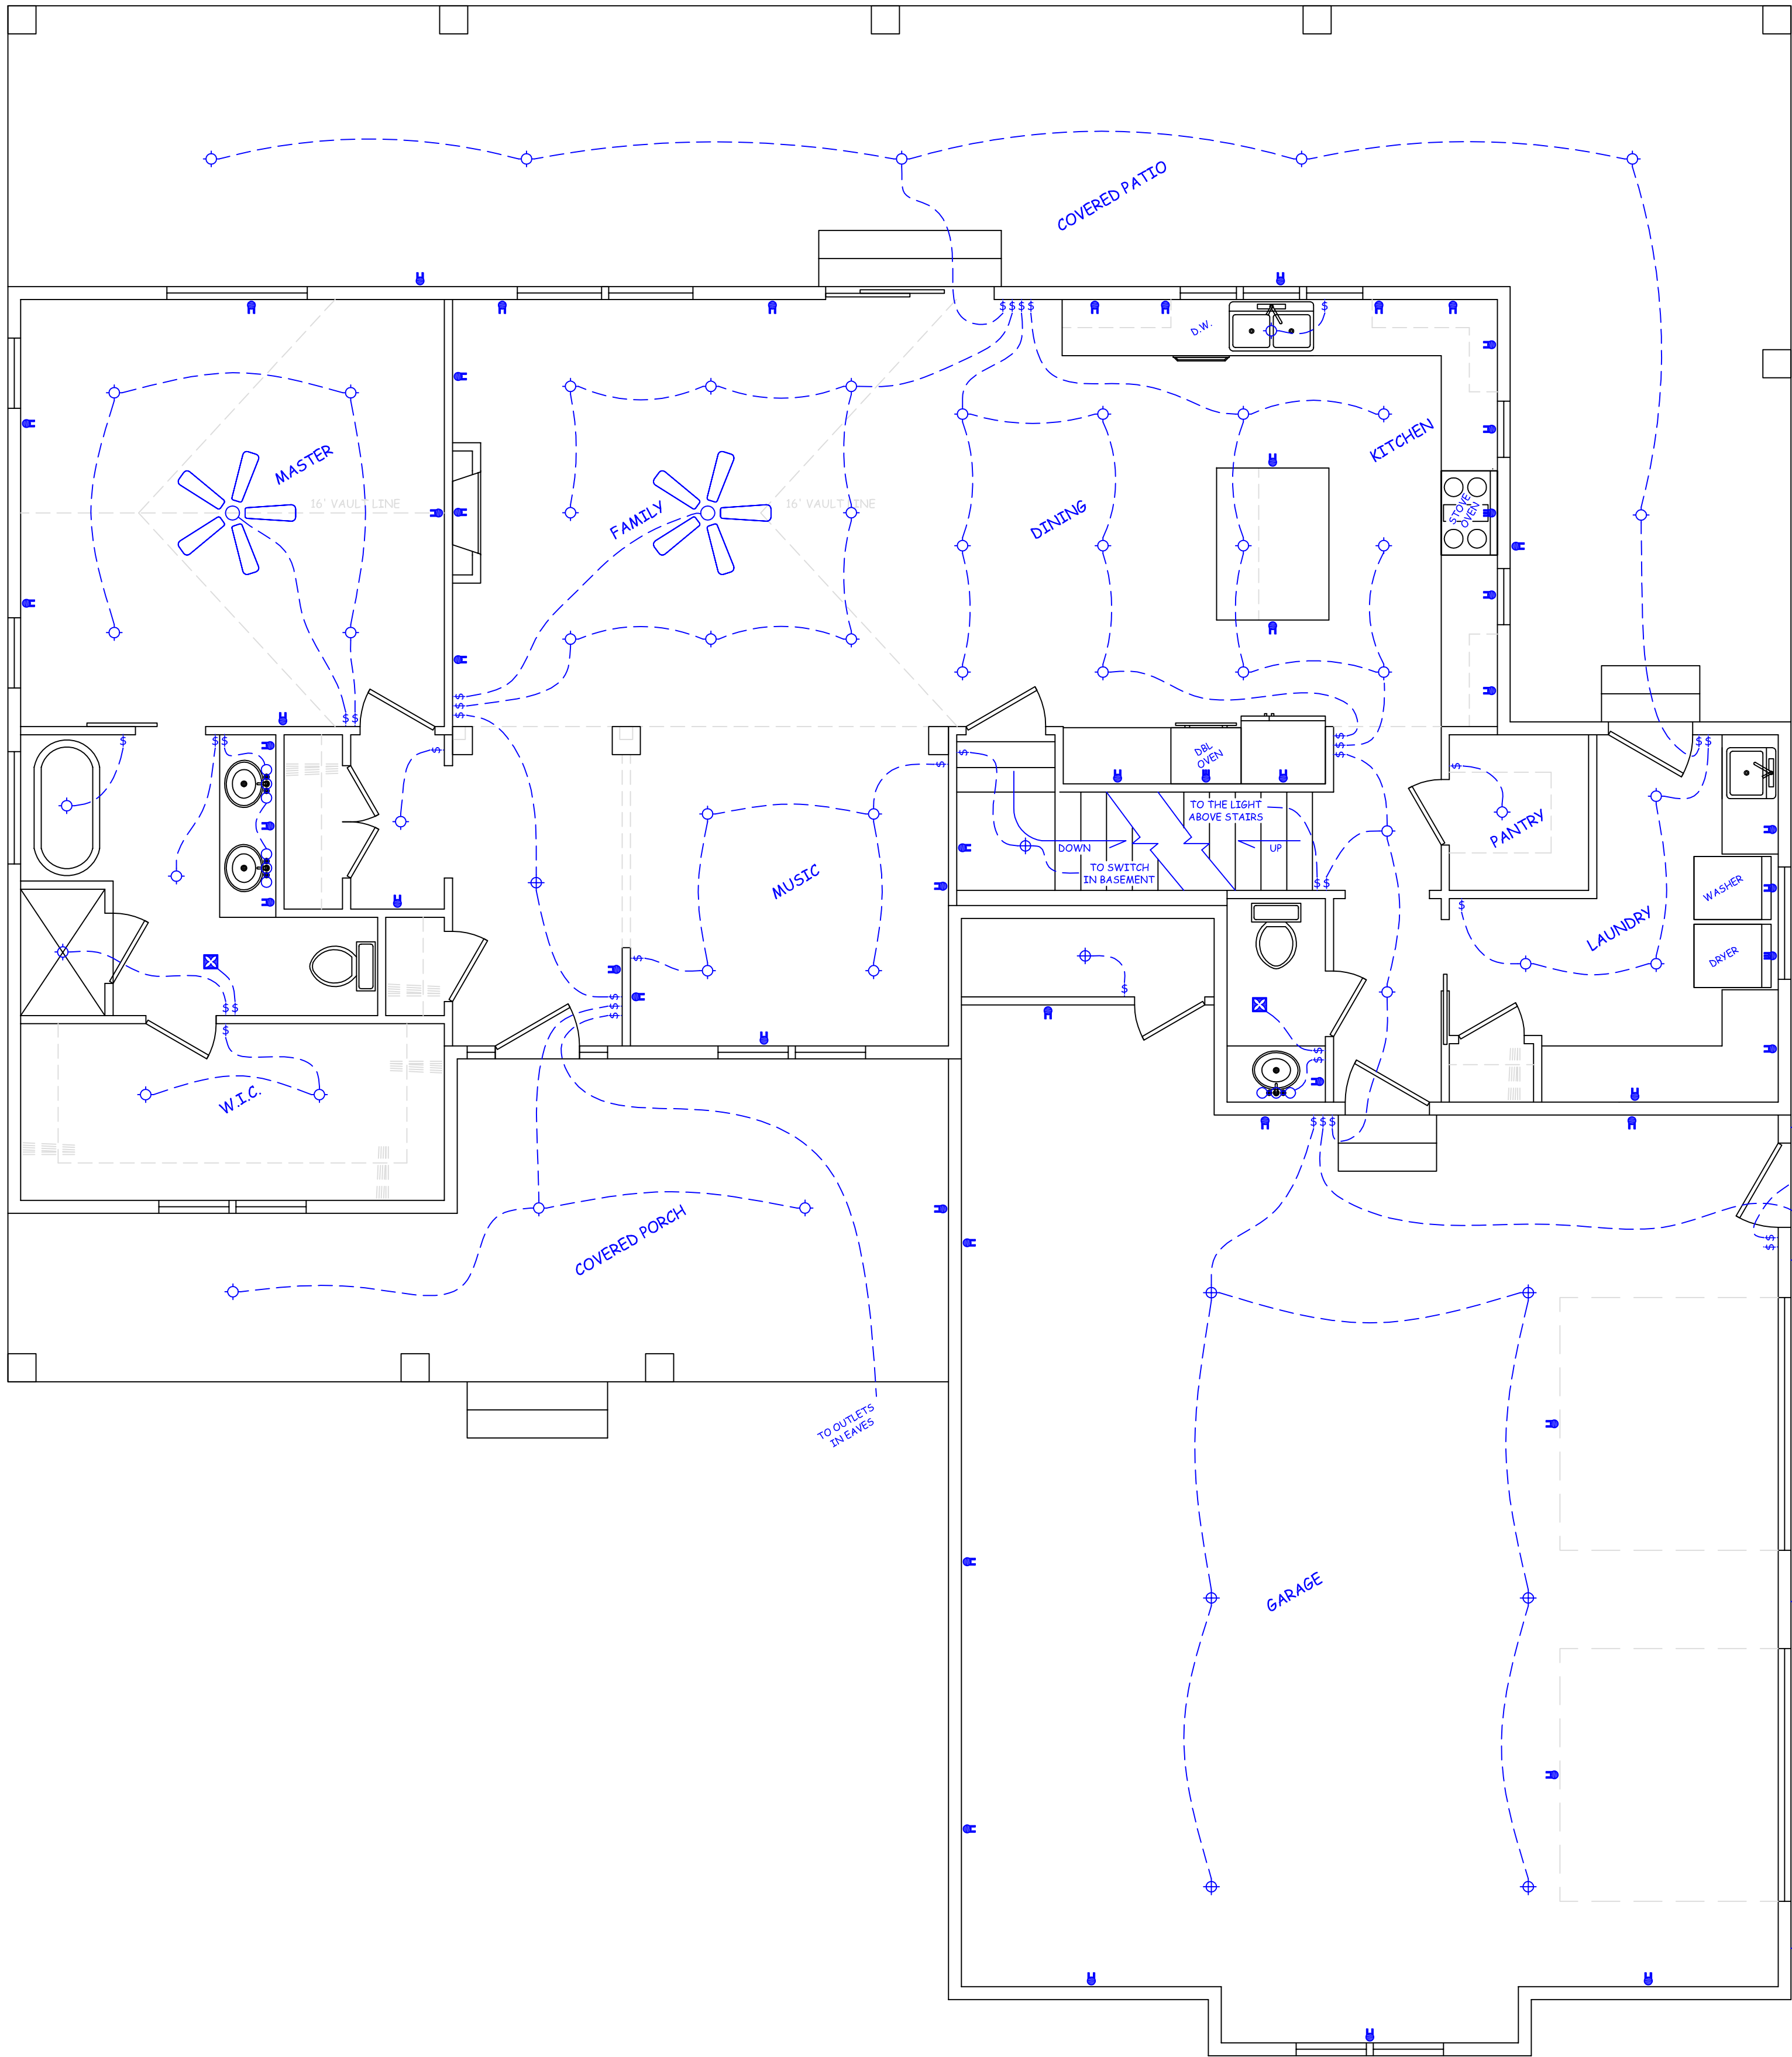

ELECTRICAL SYMBOLS	
BATH FAN	⊠
LIGHT-FLUSHMOUNT	⊕
LIGHT-RECESSED	⊙
LIGHT-STRIP	○○○
LIGHT-WALL MOUNT	⊙
PLUG - 110v	⊕
PLUG - 220	⊕
SWITCH	⊠

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

This drawing, the design it depicts, and the information contained herein are the exclusive property of Chris Field and may not be copied or reproduced, without the written permission of Chris Field.



DESIGNED BY:
CHRIS FIELD
(435) 737-8113


BASEMENT: 1676 sf
MAIN FLOOR: 1676 sf
2nd FLOOR: 1392 sf
TOTAL: 4744 sf

GARAGE: 1032 sf

PROJECT: **MITCH & LORRIE HIBBARD RESIDENCE**
LOCATION: HYDE PARK, UTAH


MAIN
ELECTRICAL
PLAN

06/18/23



SCALE: 1/4"

A6

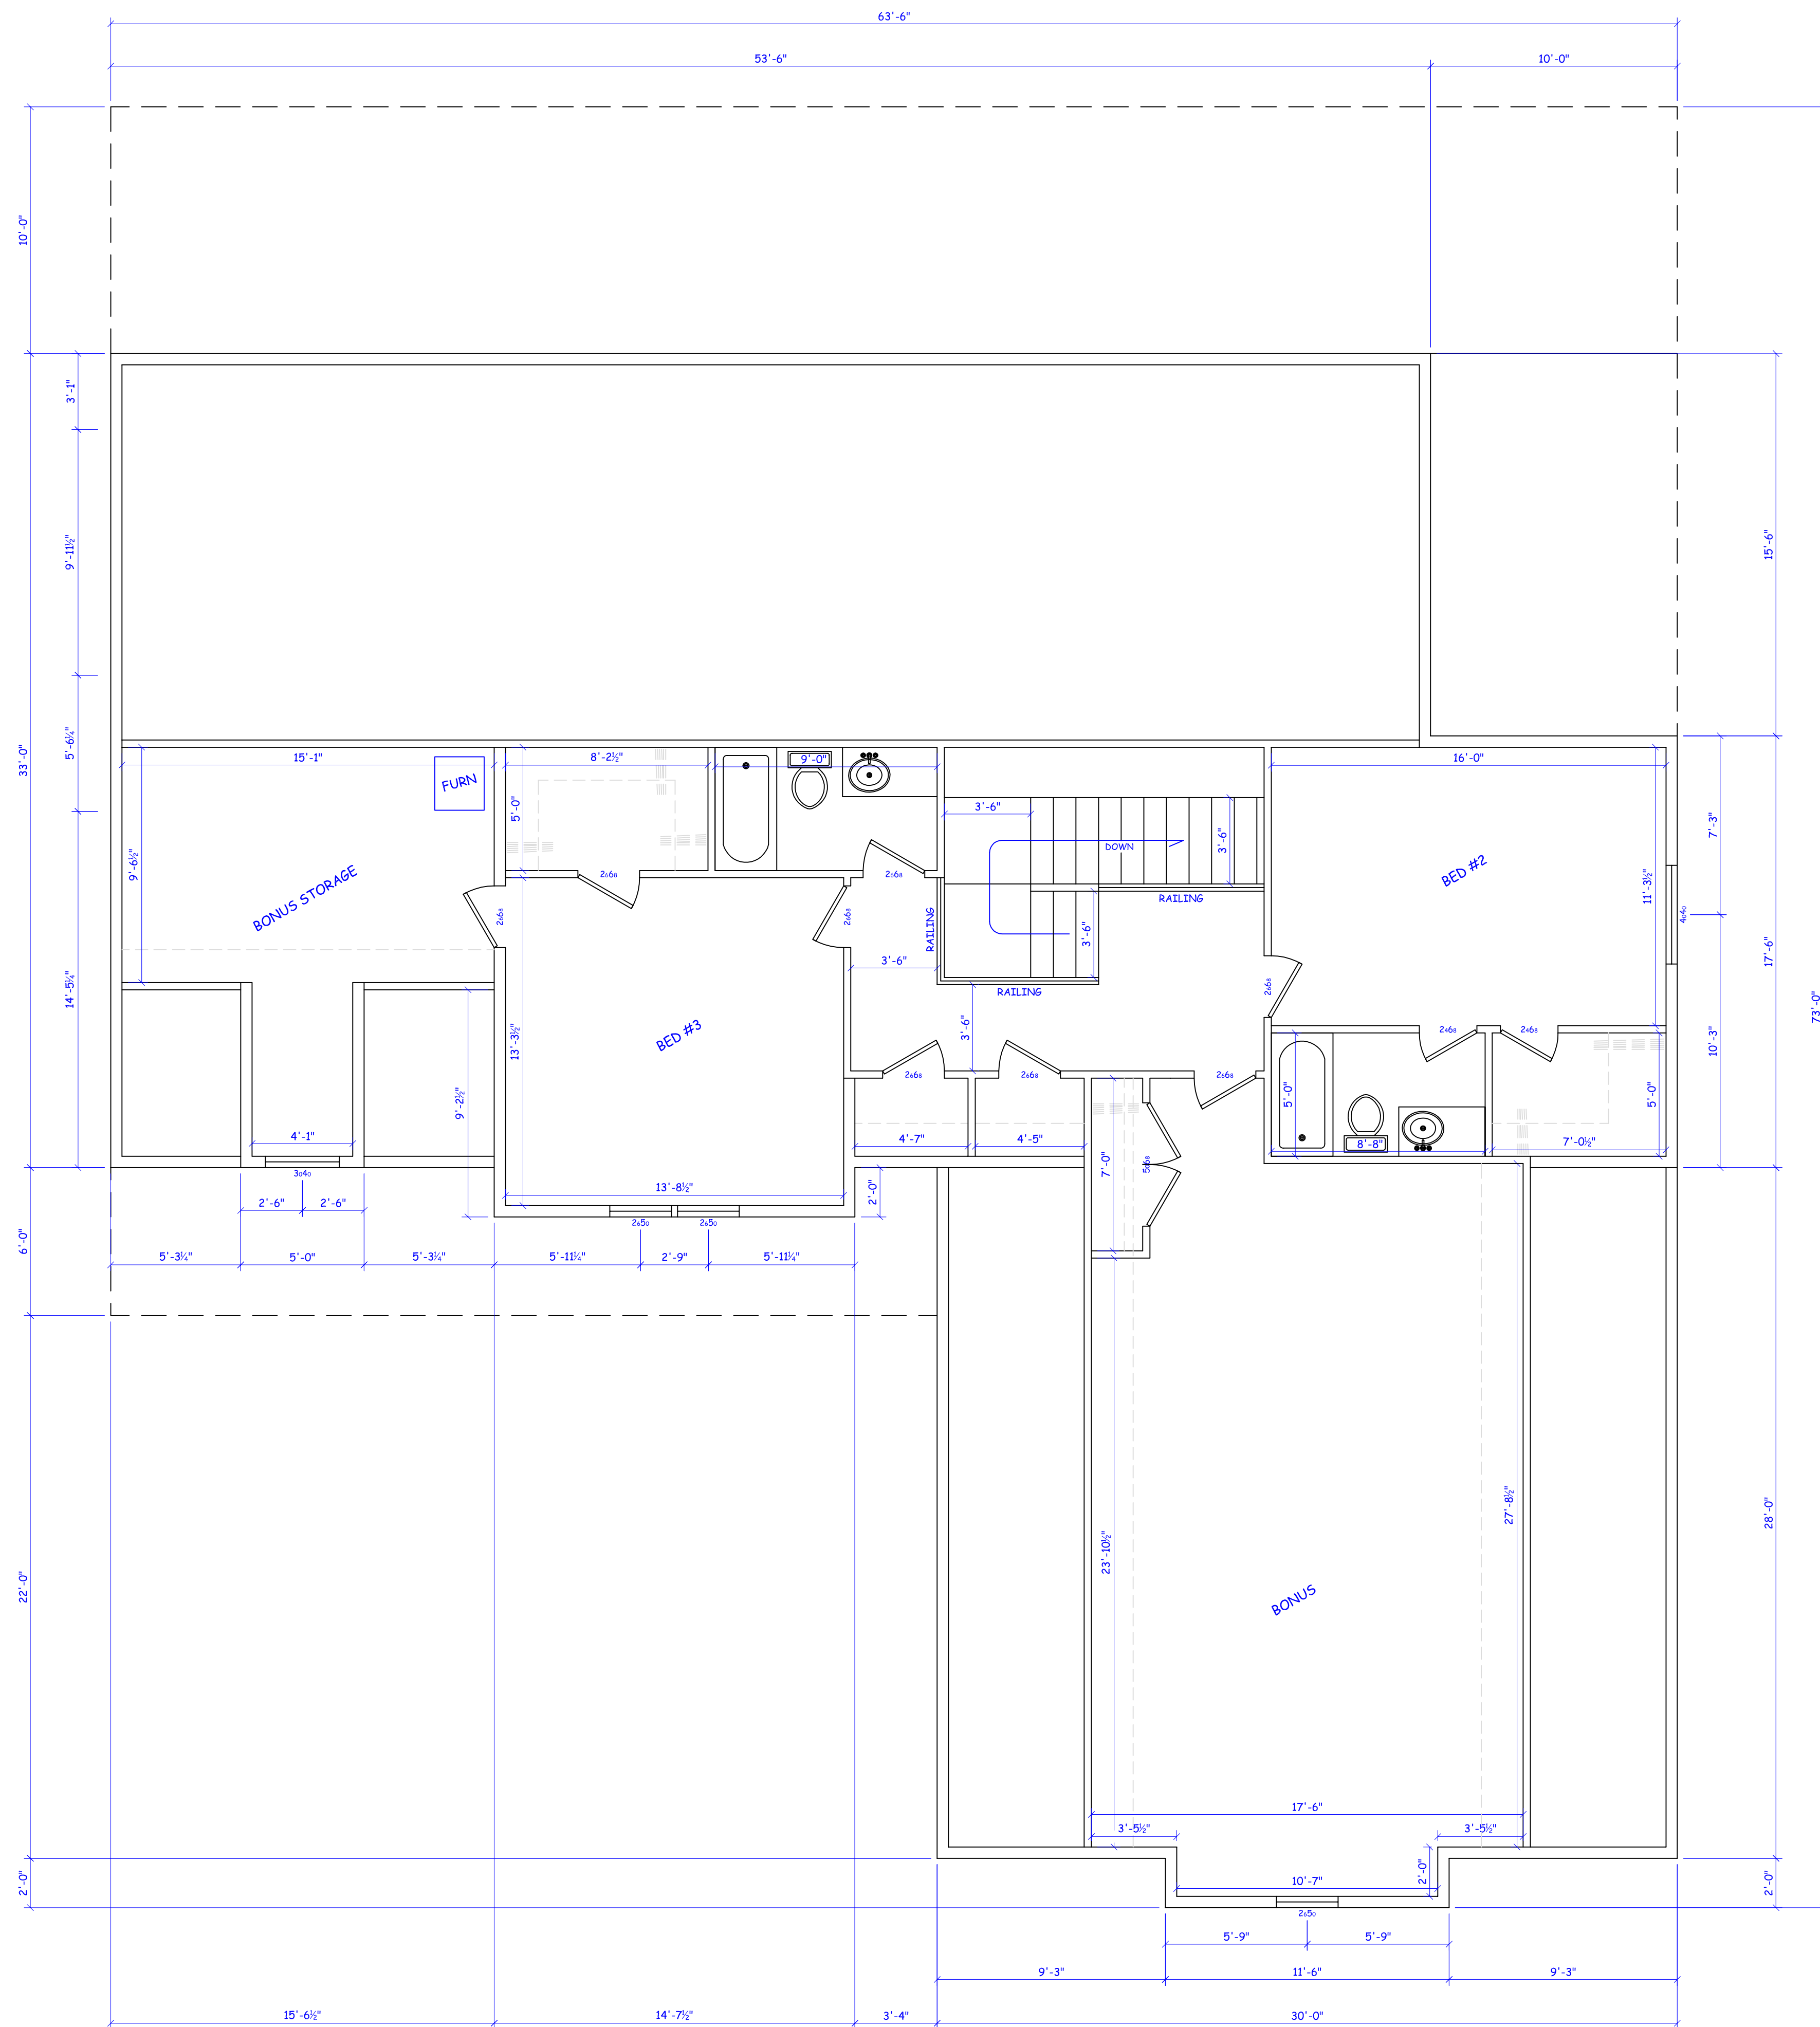

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

This drawing, the design it depicts, and the information contained herein are the exclusive property of Chris Field and may not be copied or reproduced, without the written permission of Chris Field.

—N—

SCALE: 1/4"

A7


2nd
FLOOR
PLAN

06/18/23

PROJECT: **MITCH & LORRIE HIBBARD RESIDENCE**
LOCATION: **HYDE PARK, UTAH**

DESIGNED BY:
CHRIS FIELD
(408) 757-0112

BASEMENT:	1676 sf
MAIN FLOOR:	1676 sf
2nd FLOOR:	1392 sf
TOTAL:	4744 sf

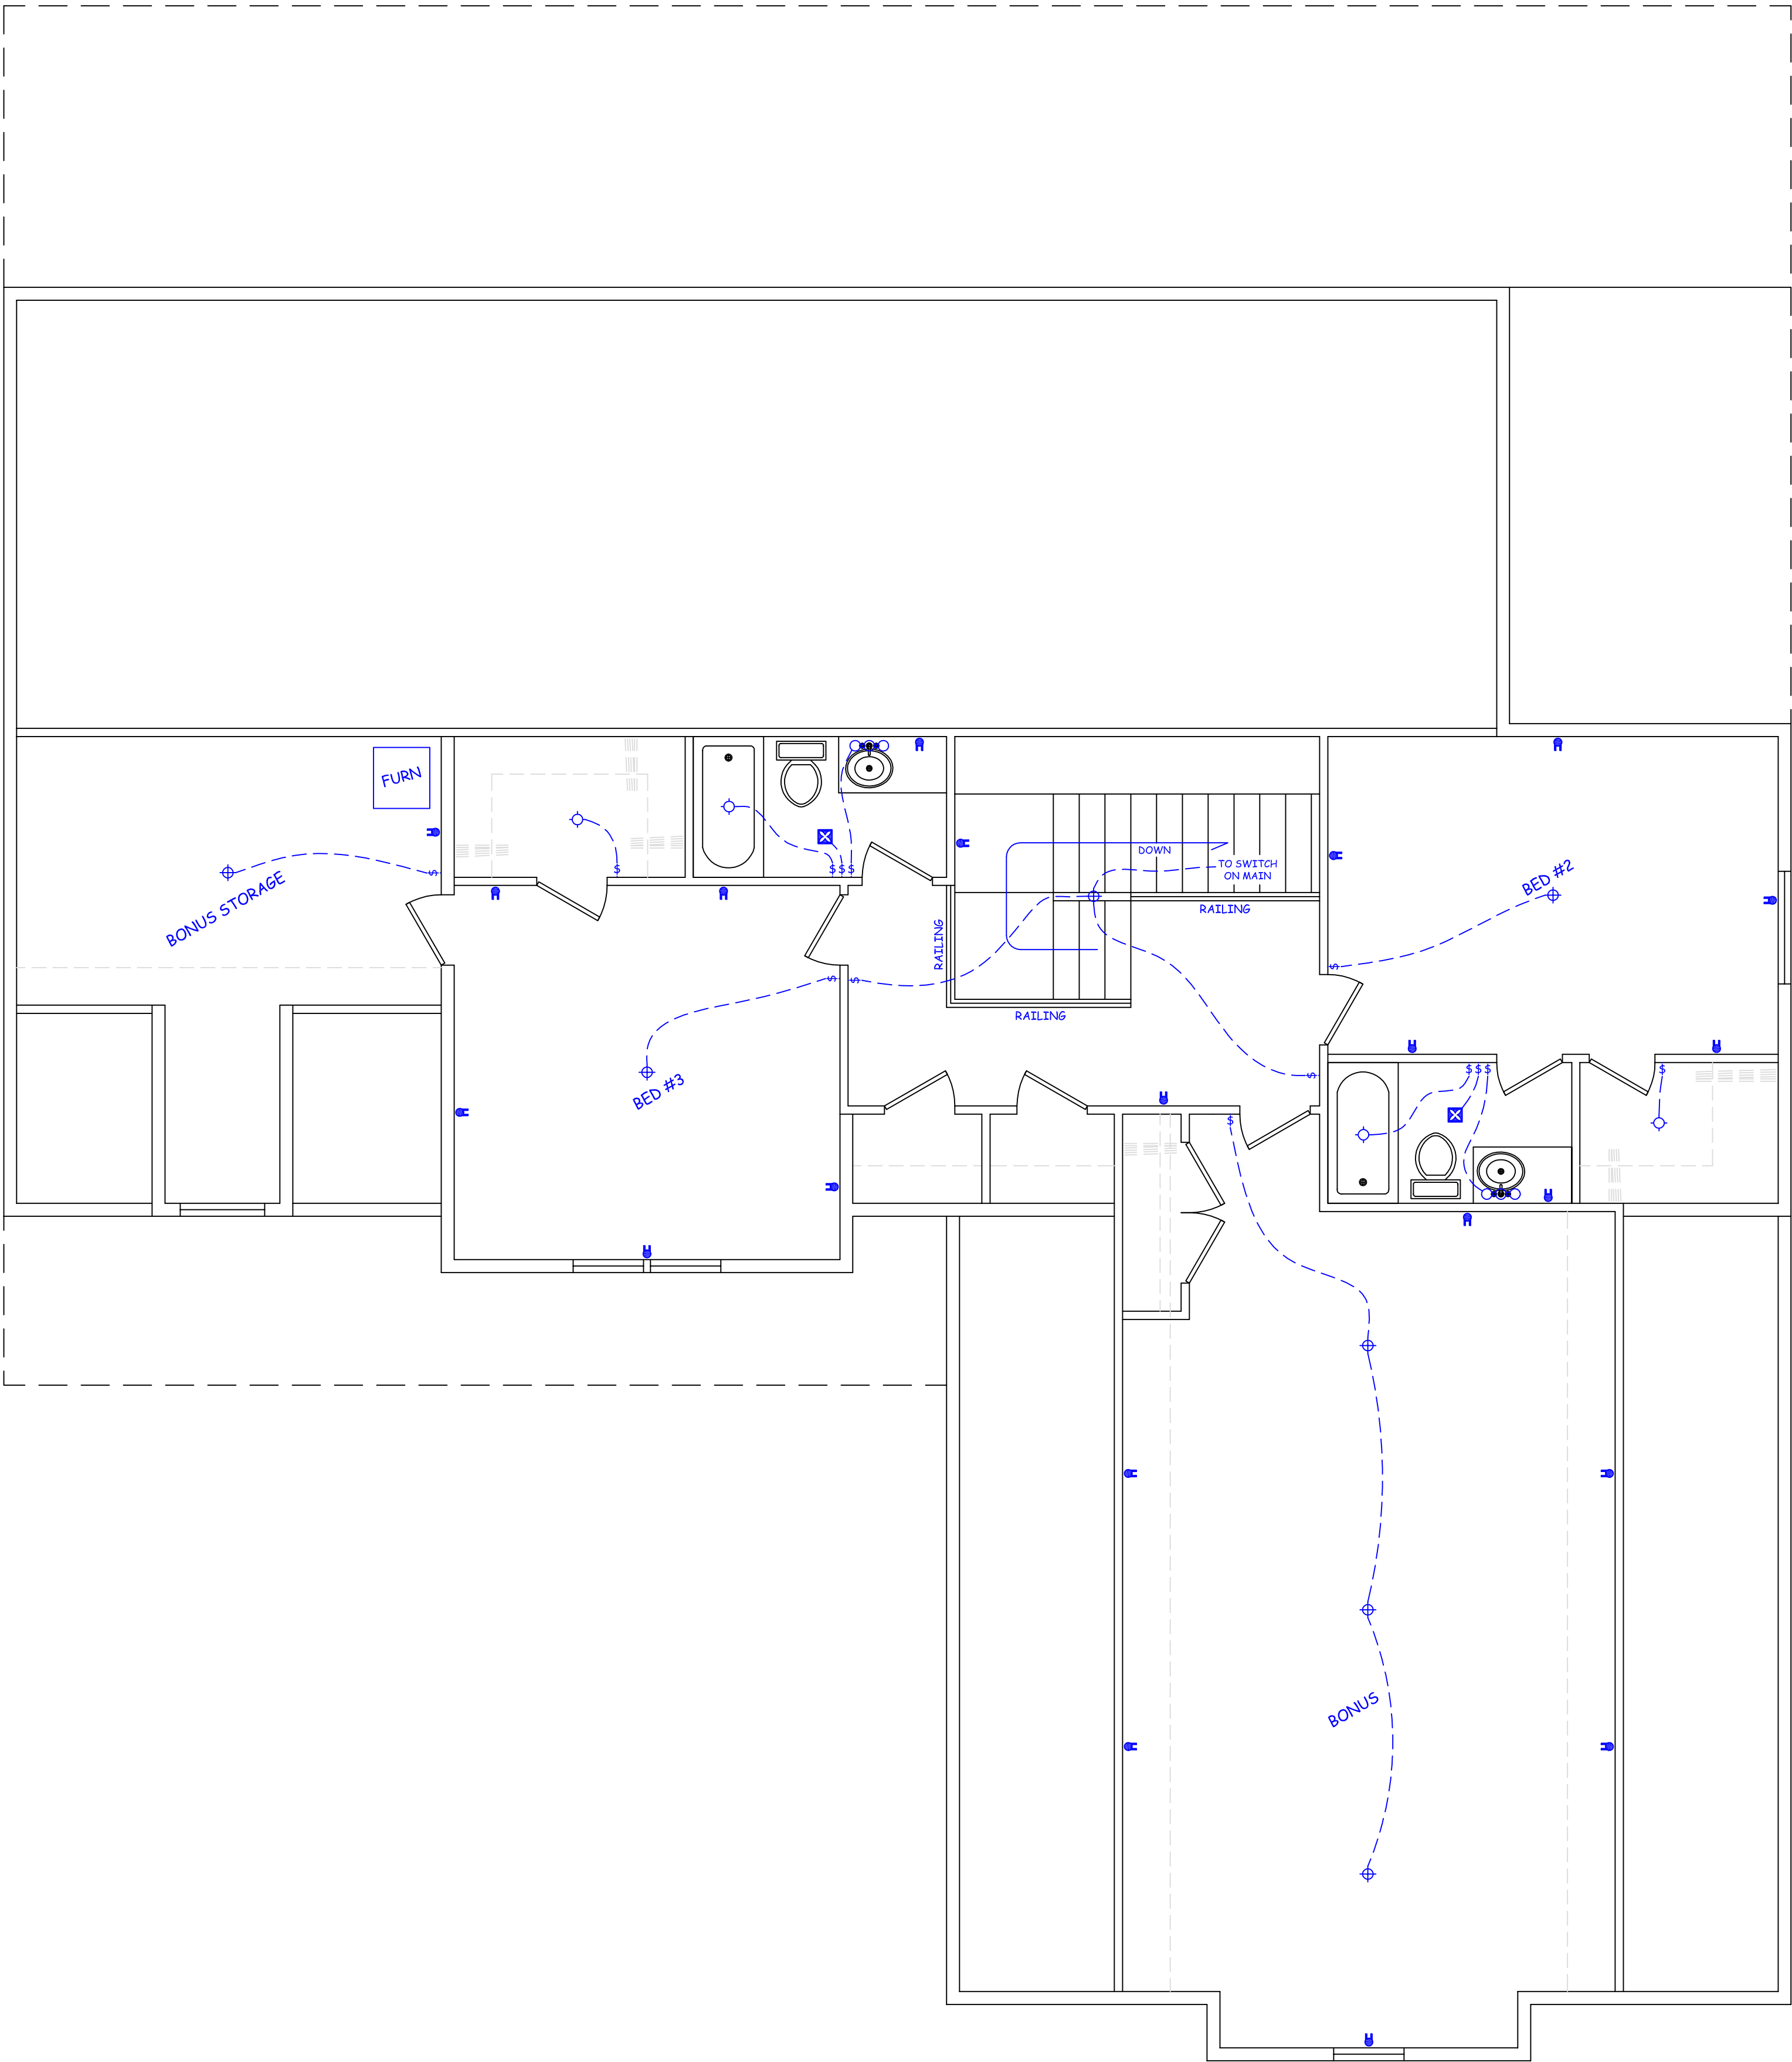

ELECTRICAL SYMBOLS	
BATH FAN	⊠
LIGHT-FLUSHMOUNT	⊕
LIGHT-RECESSED	⊙
LIGHT-STRIP	○○○
LIGHT-WALL MOUNT	⊙
PLUG - 110v	⊔
PLUG - 220	⊔
SWITCH	\$

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

This drawing, the design it depicts, and the information contained herein are the exclusive property of Chris Field and may not be copied or reproduced, without the written permission of Chris Field.




DESIGNED BY:
CHRIS FIELD
(435) 797-8113

BASEMENT: 1676 sf
MAIN FLOOR: 1676 sf
2nd FLOOR: 1392 sf
TOTAL: 4744 sf
GARAGE: 1032 sf

PROJECT: **MITCH & LORRIE HIBBARD RESIDENCE**
LOCATION: HYDE PARK, UTAH

2nd
ELECTRICAL
PLAN

06/18/23



SCALE: 1/4"


A8



FINISH GRADE

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

This drawing, the design it depicts, and the information contained herein are the exclusive property of Chris Field and may not be copied or reproduced, without the written permission of Chris Field.



DESIGNED BY:
CHRIS FIELD
(435) 797-8113


BASEMENT: 1676 sf
MAIN FLOOR: 1676 sf
2nd FLOOR: 1392 sf
TOTAL: 4744 sf

GARAGE: 1032 sf

PROJECT: **MITCH & LORRIE HIBBARD RESIDENCE**
LOCATION: HYDE PARK, UTAH

WEST
ELEVATION

06/18/23



SCALE: 1/4"

A9



Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

This drawing, the design it depicts, and the information contained herein are the exclusive property of Chris Field and may not be copied or reproduced, without the written permission of Chris Field.

DESIGNED BY:

CHRIS FIELD

(435) 737-8113

BASEMENT: 1676 sf

MAIN FLOOR: 1676 sf

2nd FLOOR: 1392 sf

TOTAL: 4744 sf

GARAGE: 1032 sf

PROJECT: MITCH & LORRIE HIBBARD RESIDENCE

LOCATION: HYDE PARK, UTAH

EAST ELEVATION

06/18/23

SCALE: 1/4"

A10




Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

This drawing, the design it depicts, and the information contained herein are the exclusive property of Chris Field and may not be copied or reproduced, without the written permission of Chris Field.

A11

SCALE: 1/4"




06/18/23

NORTH
ELEVATION

PROJECT: MITCH & LORRIE HIBBARD RESIDENCE
LOCATION: HYDE PARK, UTAH

BASEMENT: 1676 sf
MAIN FLOOR: 1676 sf
2nd FLOOR: 1392 sf
TOTAL: 4744 sf
GARAGE: 1032 sf

DESIGNED BY:
CHRIS FIELD
(435) 797-8113





Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

This drawing, the design it depicts, and the information contained herein are the exclusive property of Chris Field and may not be copied or reproduced, without the written permission of Chris Field.

PROJECT:

MITCH & LORRIE HIBBARD RESIDENCE

LOCATION:

HYDE PARK, UTAH

SOUTH
ELEVATION

06/18/23

SCALE: 1/4"

A12

DESIGNED BY:

CHRIS FIELD

(435) 737-8113


BASEMENT: 1676 sf

MAIN FLOOR: 1676 sf

2nd FLOOR: 1392 sf


TOTAL: 4744 sf

GARAGE: 1032 sf

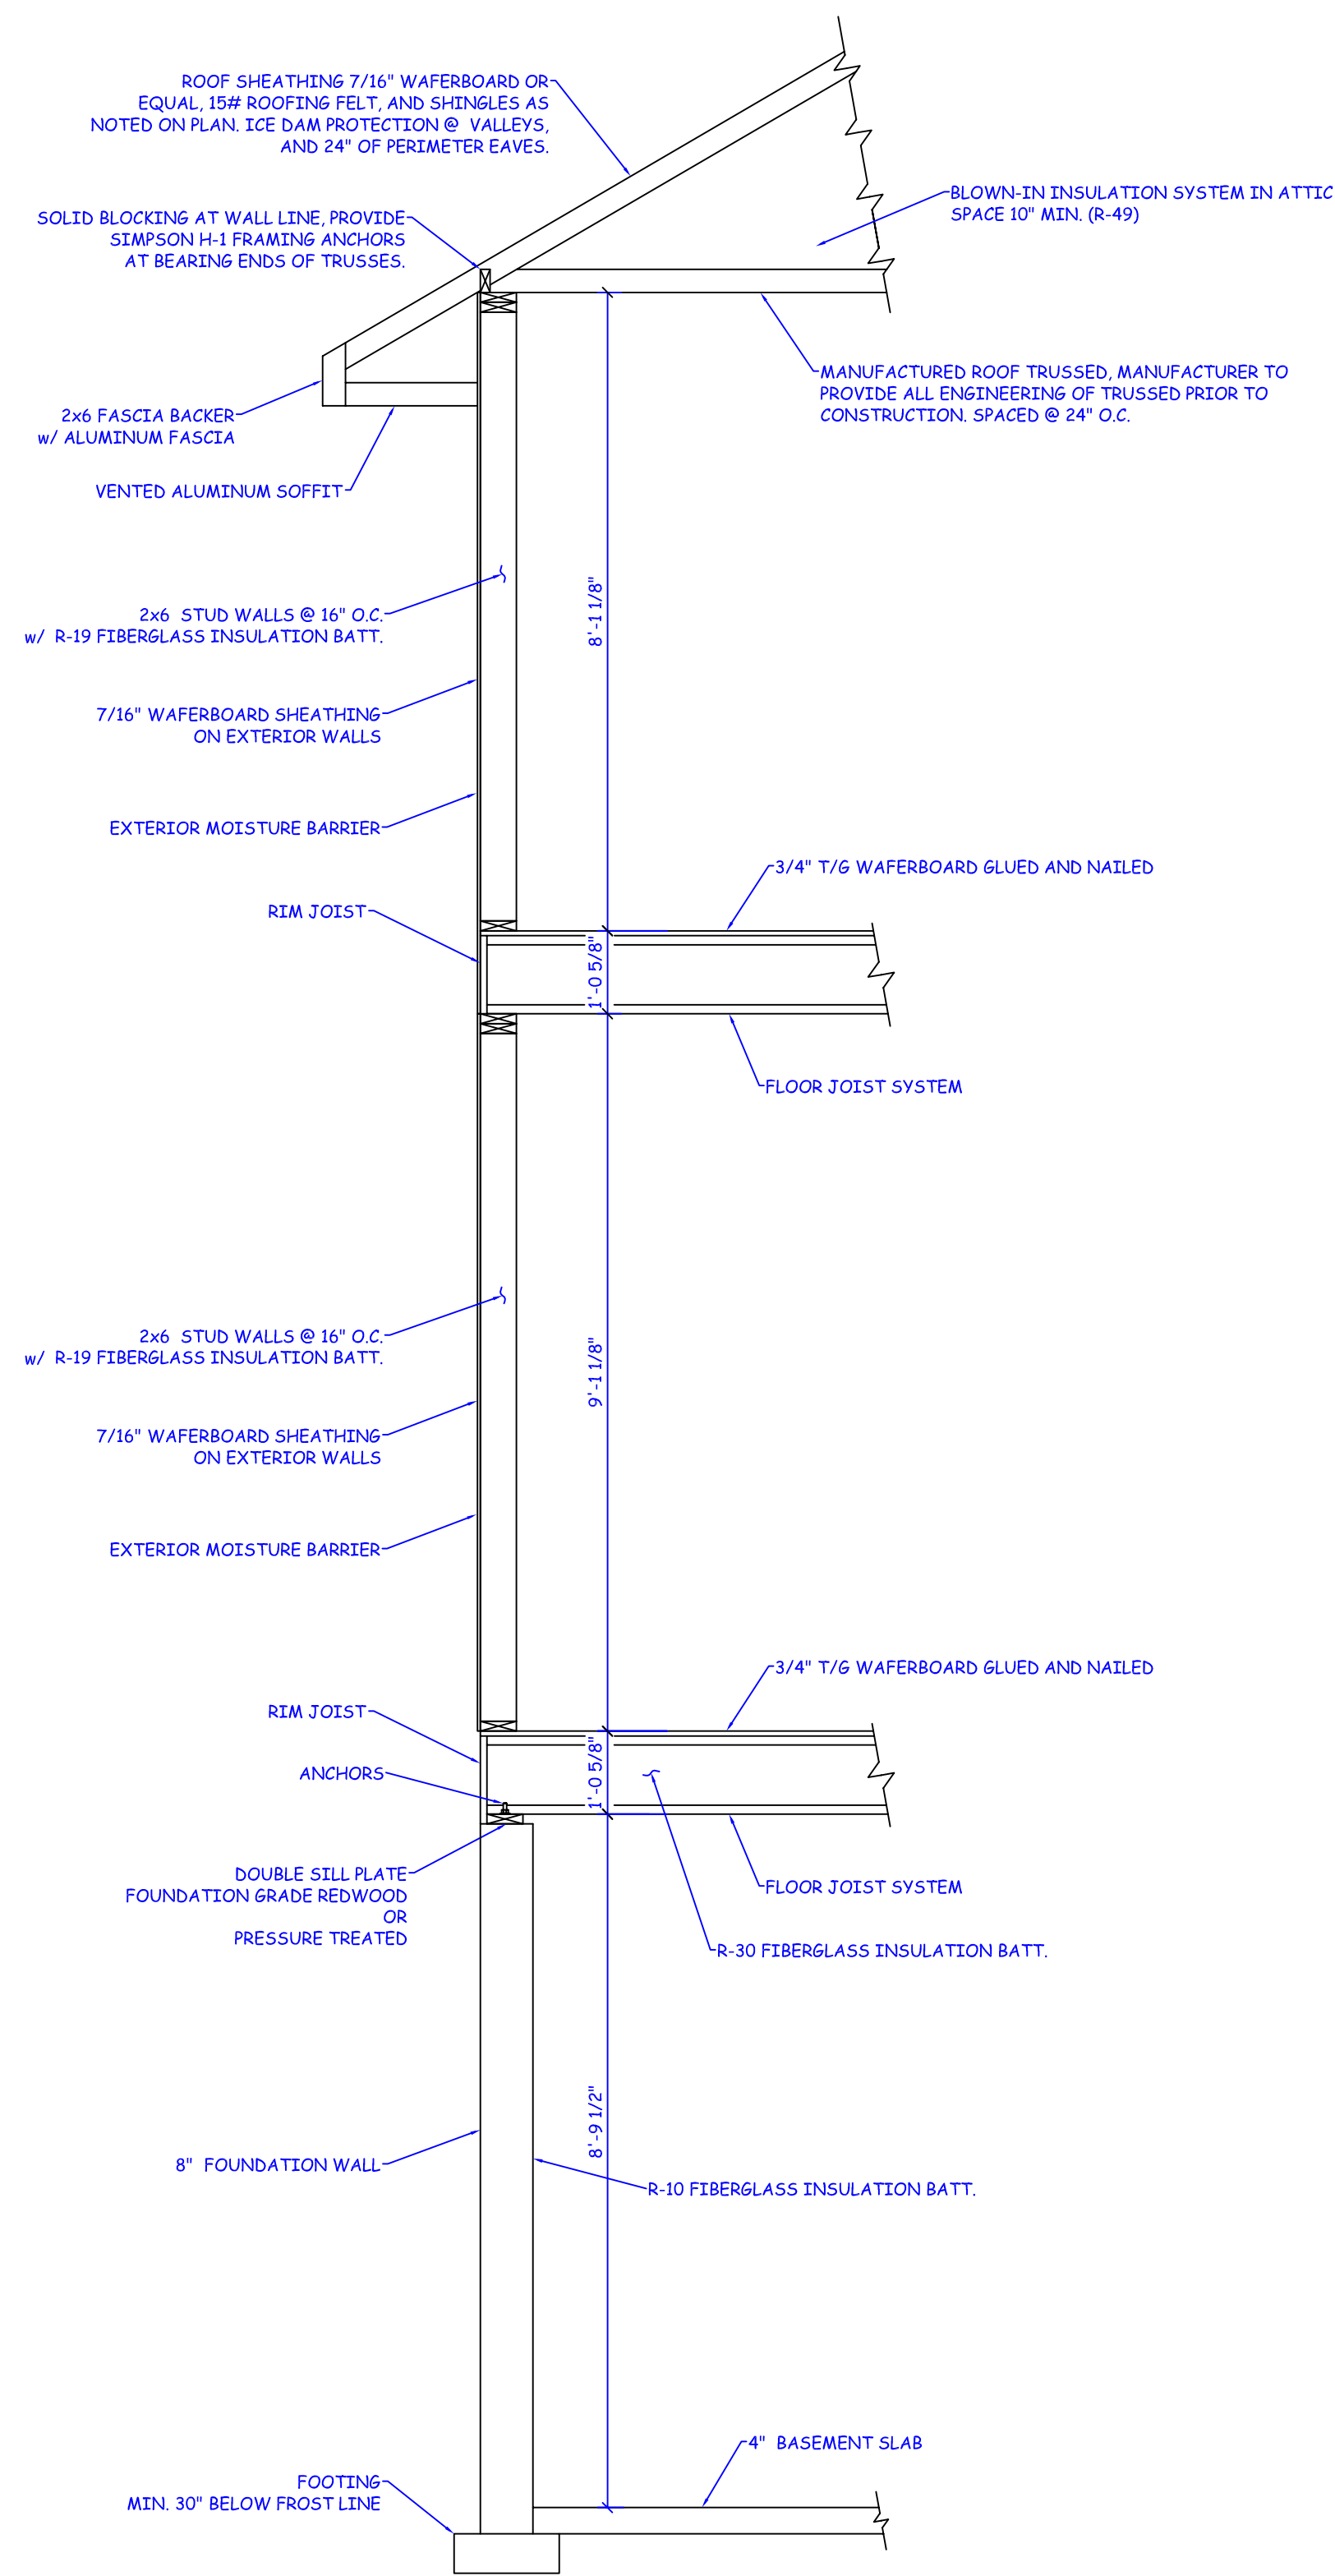


WALL CROSS SECTION

- (A) 2x12 STRINGER - 3 EACH REQUIRED
- (B) 2x6 KICK PLATE - ANCHORED TO CONCRETE WITH 1/2" EXPANSION BOLTS - ANCHORED TO FLOOR DECKING WITH 6 - 16d NAILS.
- (C) 11x9/8" PARTICLE BOARD TREAD WITH 1" MIN. NOSING
- (D) 1"x8" #2 PINE RISER
- (E) 2x6 LEDGER SECURED TO EACH STUD WITH 2 - 16d NAILS.
- (F) HANDRAIL/GUARDRAIL - FINAL STYLE, MATERIAL AND COLOR TO BE OWNER'S CHOICE. DESIGN TO BE PER CURRENT U.S.C.
 - 1. GUARDRAILS TO BE 36" HIGH MIN.
 - 2. HANDRAILS TO BE 34" TO 38" ABOVE NOSING OF TREAD
 - 3. OPEN RAILING TO HAVE INTERMEDIATE RAILS OR ORNAMENTAL PATTERN SUCH THAT A SPHERE 4" ROUND CANNOT PASS THRU.
- (G) 5/8" TYPE "X" DRYWALL REQUIRED UNDER STAIRS AND ALONG STAIR WELL WALLS.

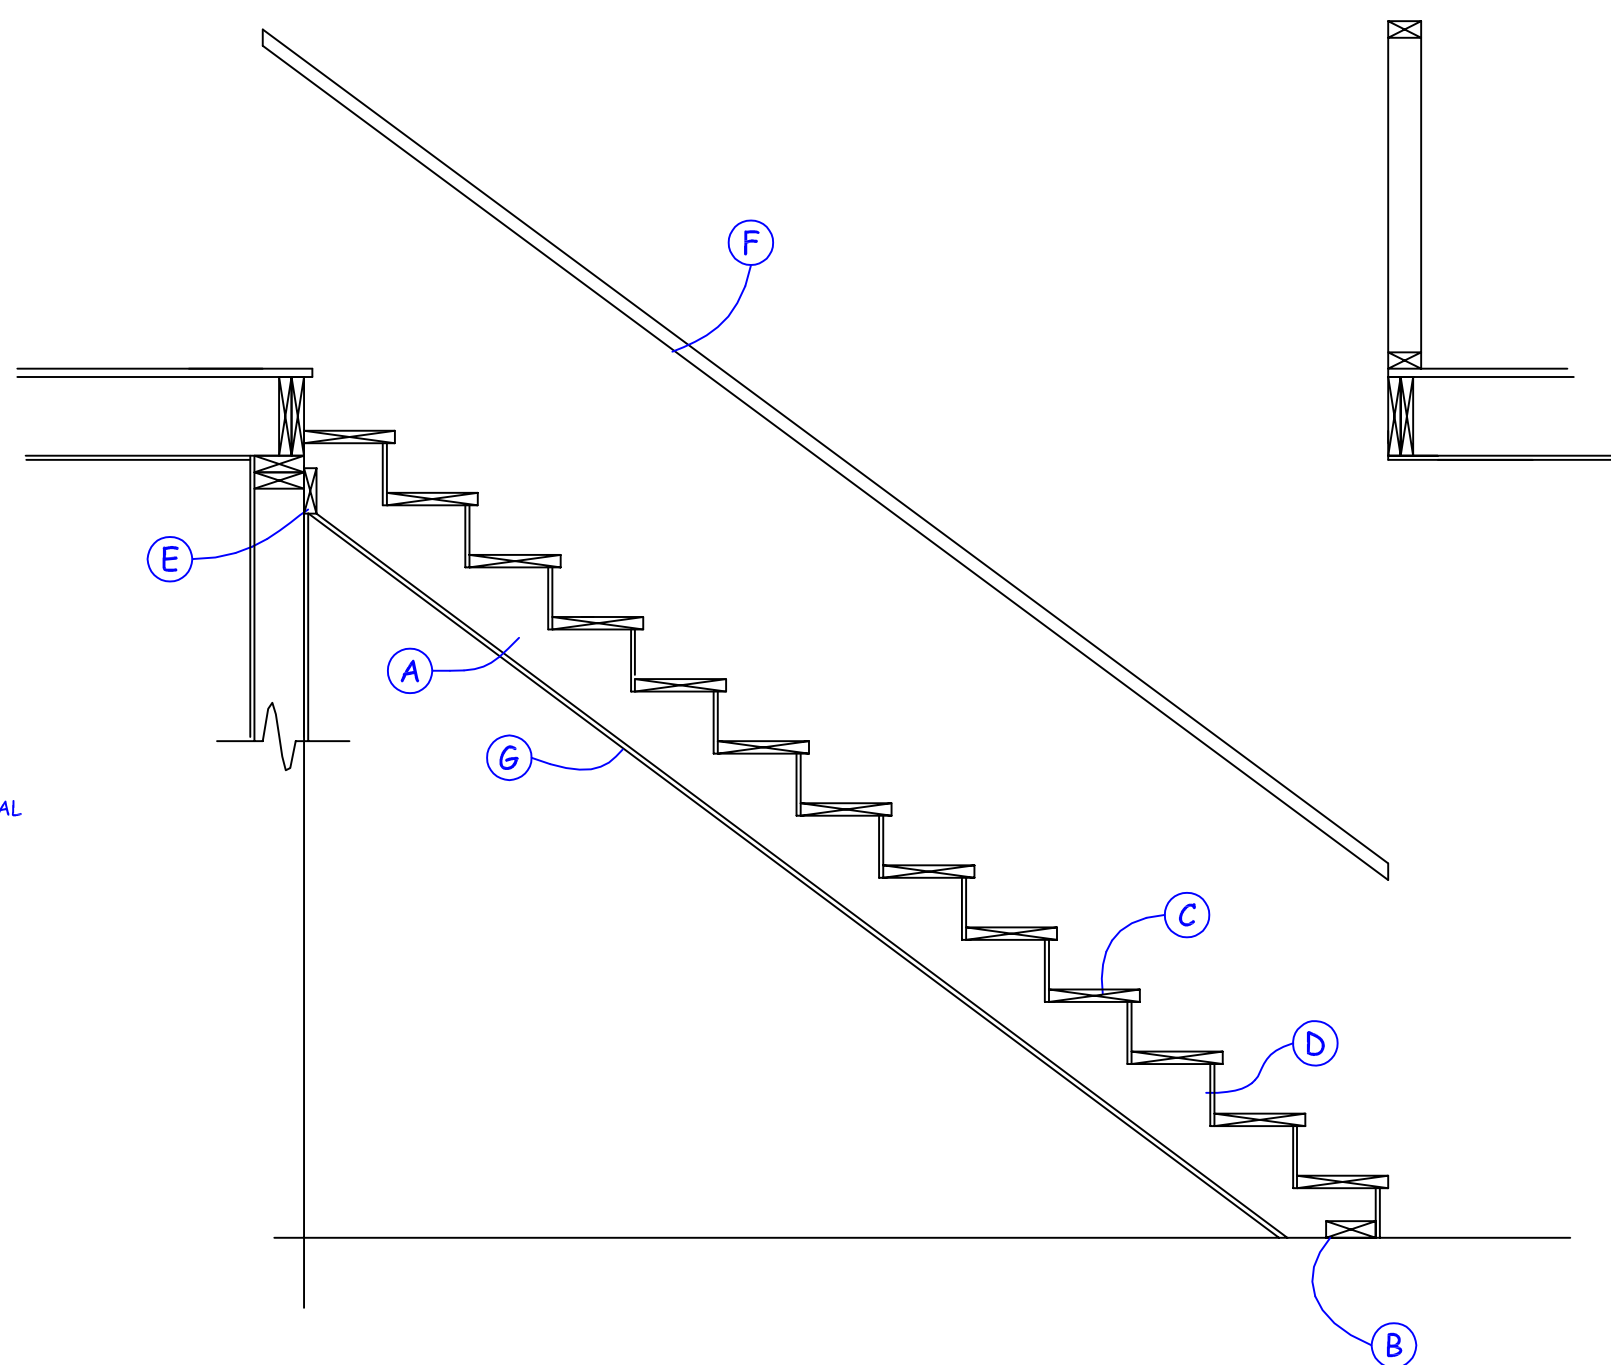


STAIR DETAIL

ROOF SLOPE PLAN
1/8" SCALE

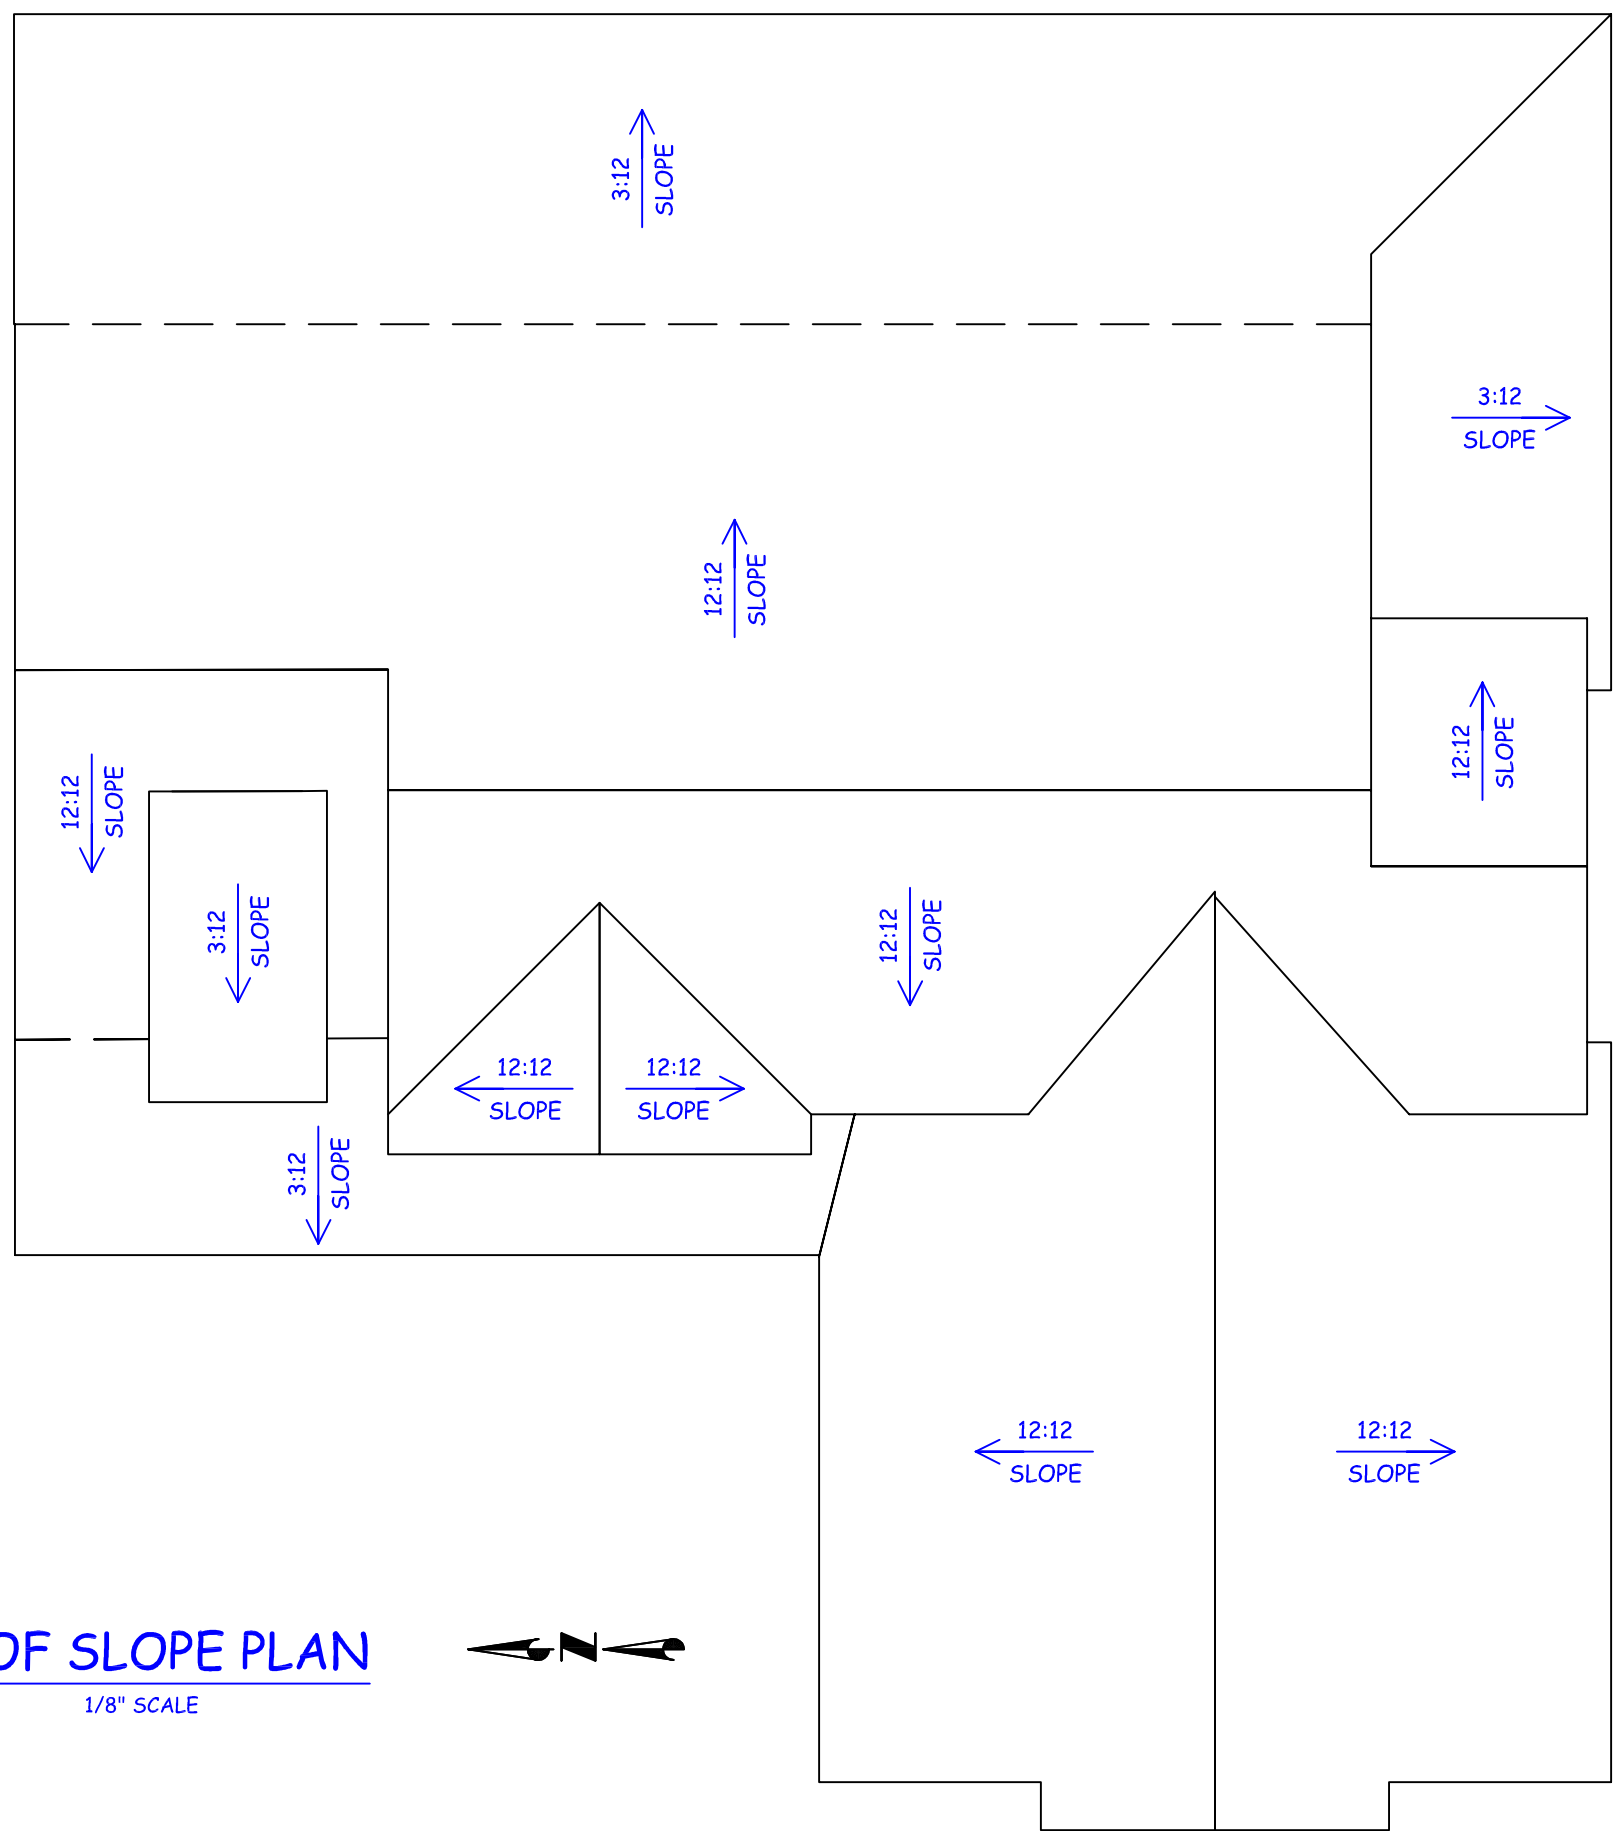

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

This drawing, the design it depicts, and the information contained herein are the exclusive property of Chris Field and may not be copied or reproduced, without the written permission of Chris Field.



BASEMENT: 1676 sf
MAIN FLOOR: 1676 sf
2nd FLOOR: 1392 sf
TOTAL: 4744 sf
GARAGE: 1032 sf



PROJECT: **MITCH & LORRIE HIBBARD RESIDENCE**
LOCATION: **HYDE PARK, UTAH**

ROOM,
SECTION
& DETAIL

06/18/23

A13

FOUNDATION WALL SCHEDULE				
MARK ⁽²⁾	FND8 - 8" THICK CONCRETE FOUNDATION WALLS			
MAX HEIGHT	VERT. STEEL ⁽³⁾	HORIZ. STEEL ⁽⁴⁾	LINTELS ⁽⁵⁾	
			MAX SPAN	MIN DEPTH
2'	#4 @ 32" O.C.	(2) #4	2'	6"
3'	#4 @ 32" O.C.	(3) #4	2'	6"
4'	#4 @ 32" O.C.	(4) #4	3'	6"
6' ⁽⁶⁾	#4 @ 24" O.C.	(5) #4	6'	SEE NOTE 8
8' ⁽⁶⁾	#4 @ 24" O.C.	(6) #4	6'	SEE NOTE 8
9' ⁽⁶⁾	#4 @ 16" O.C.	(7) #4	6'	SEE NOTE 8
1. VALUES IN THE TABLE ABOVE BETWEEN 2'-9" ARE PROVIDED FROM UTAH STATE CODE 15A-3-108.				
2. FOUNDATION WALLS SHALL BE 8" THICK (FND8) U.N.O. (FND.)				
3. VERTICAL REINFORCEMENT SHALL BE PLACED IN THE CENTER OF THE WALL. REBAR EXTENSION BARS INTO THE FOOTINGS SHALL EXTEND UP INTO FOUNDATION WALL A MINIMUM OF 24"				
4. ONE HORIZONTAL BAR SHALL BE PLACED 4" FROM THE TOP OF THE WALL AND 4" FROM THE BOTTOM OF THE WALL WITH ALL OTHER HORIZONTAL BARS EVENLY SPACED. PROVIDE REINFORCING AROUND CORNERS SUCH THAT IT LAPS HORIZONTAL BARS A MINIMUM OF 24"				
5. PROVIDE (2)#4 BARS ABOVE MAX LINTEL SPAN SHOWN IN TABLE WITH (1)#4 ON EACH SIDE AND (1)#4 BELOW THE OPENING. BARS SHALL BE PLACED WITHIN 2" OF THE OPENING AND EXTEND 24" (MIN.) BEYOND THE OPENING. VERTICAL BARS MAY TERMINATE 3" BELOW THE TOP OF WALL.				
6. CONCRETE SHALL CURE A MINIMUM OF 7 DAYS AND HAVE INTERIOR SLAB INSTALLED PRIOR TO ANY BACKFILL. FOUNDATION WALLS 6' IN HEIGHT AND ABOVE DESIGNED FOR TOP SUPPORT. CONTRACTOR SHALL INSTALL FLOOR OR ROOF DIAPHRAGM PRIOR TO BACKFILL AND SHALL NOT COMPACT ANY BACKFILL PLACED AROUND THESE WALLS.				
7. ALL FOUNDATIONS SHALL HAVE 6" MIN. EXPOSED ABOVE GRADE.				
8. PROVIDE 2" DEPTH OF LINTEL FOR EACH FOOT OF OPENING. 6" MINIMUM.				
FOOTING SCHEDULE				
FROST DEPTH FOR ALL EXTERIOR FOOTINGS			30"	
CONTINUOUS FOOTINGS				
MARK ON PLANS	FOOTING WIDTH	FOOTING DEPTH	CONT. REINF.	PERP. REINF.
F18	18"	10"	(2) #4	N/A
F20	20"	10"	(2) #4	N/A
F36	36"	10"	(4) #4	N/A
SPOT FOOTINGS				
MARK ON PLANS	FOOTING SQ DIM.		FOOTING DEPTH	REINF.
SF24	24" X 24"		10"	(3) #4 B.W.
SF36	36" X 36"		10"	(4) #4 B.W.
SF48	48" X 48"		10"	(5) #4 B.W.
PIER SCHEDULE				
MARK ON PLANS	PIER DIA.	SQ. PIER DIM.	VERT. REINF.	
P12	12"	12" X 12"	(4) #4 W/ #3 TIES @ 12" O.C.	
1. CONTINUOUS FOOTINGS SHALL BE F18 INTERIOR, F20 EXTERIOR U.N.O.				
2. FOOTINGS SHALL BE PLACED ON COMPACTED NATIVE SOILS AT FROST DEPTH SPECIFIED OR ON ENGINEERED FILL MATERIAL AS SPECIFIED BY A LICENSED GEOTECHNICAL ENGINEER.				
3. FOOTING REINFORCEMENT SHALL BE PLACED 3" FROM BOTTOM OF FOOTING AND LAPPED 24" MINIMUM WHERE NECESSARY				
HOLDOWN SCHEDULE				
MARK	HOLDOWN		NOTES	
	SIMPSON #LSTHD8 (RJ)		CAST IN PLACE	
	SIMPSON #STHD10 (RJ)		CAST IN PLACE	
	SIMPSON #STHD14 (RJ)		CAST IN PLACE	
	SIMPSON #HTT5 ⁽²⁾⁽³⁾		INSTALL $\frac{5}{8}$ " Ø THREADED ROD WITH 3"X3-1/2" MIN. WOOD MEMBER SIZE	
	SIMPSON #HDU8 ⁽³⁾		INSTALL $\frac{7}{8}$ " Ø THREADED ROD WITH 3"X3-1/2" MIN. WOOD MEMBER SIZE	
	SIMPSON #HDU11 ⁽³⁾		INSTALL 1" Ø THREADED ROD WITH 3"X5-1/2" MIN. WOOD MEMBER SIZE	
1. FOLLOW SPECIFICATIONS IN LATEST SIMPSON WOOD CONSTRUCTION CONNECTORS CATALOG				
2. ALTERNATE TO ANY CAST IN PLACE STRAP ABOVE				
3. CAST IN THREADED ROD OR DRILL AND EPOXY IN FOUNDATION WALL 16" MIN. EMBED AND WITHIN 6" OF VERTICAL FOUNDATION REBAR USING SIMPSON XP EPOXY OR APPROVED EQUAL				

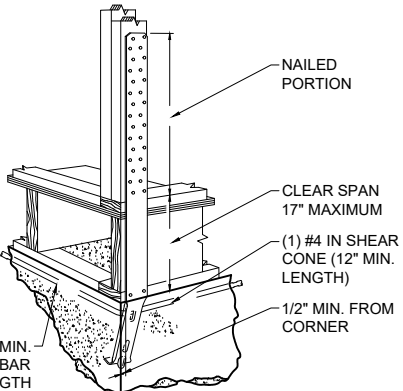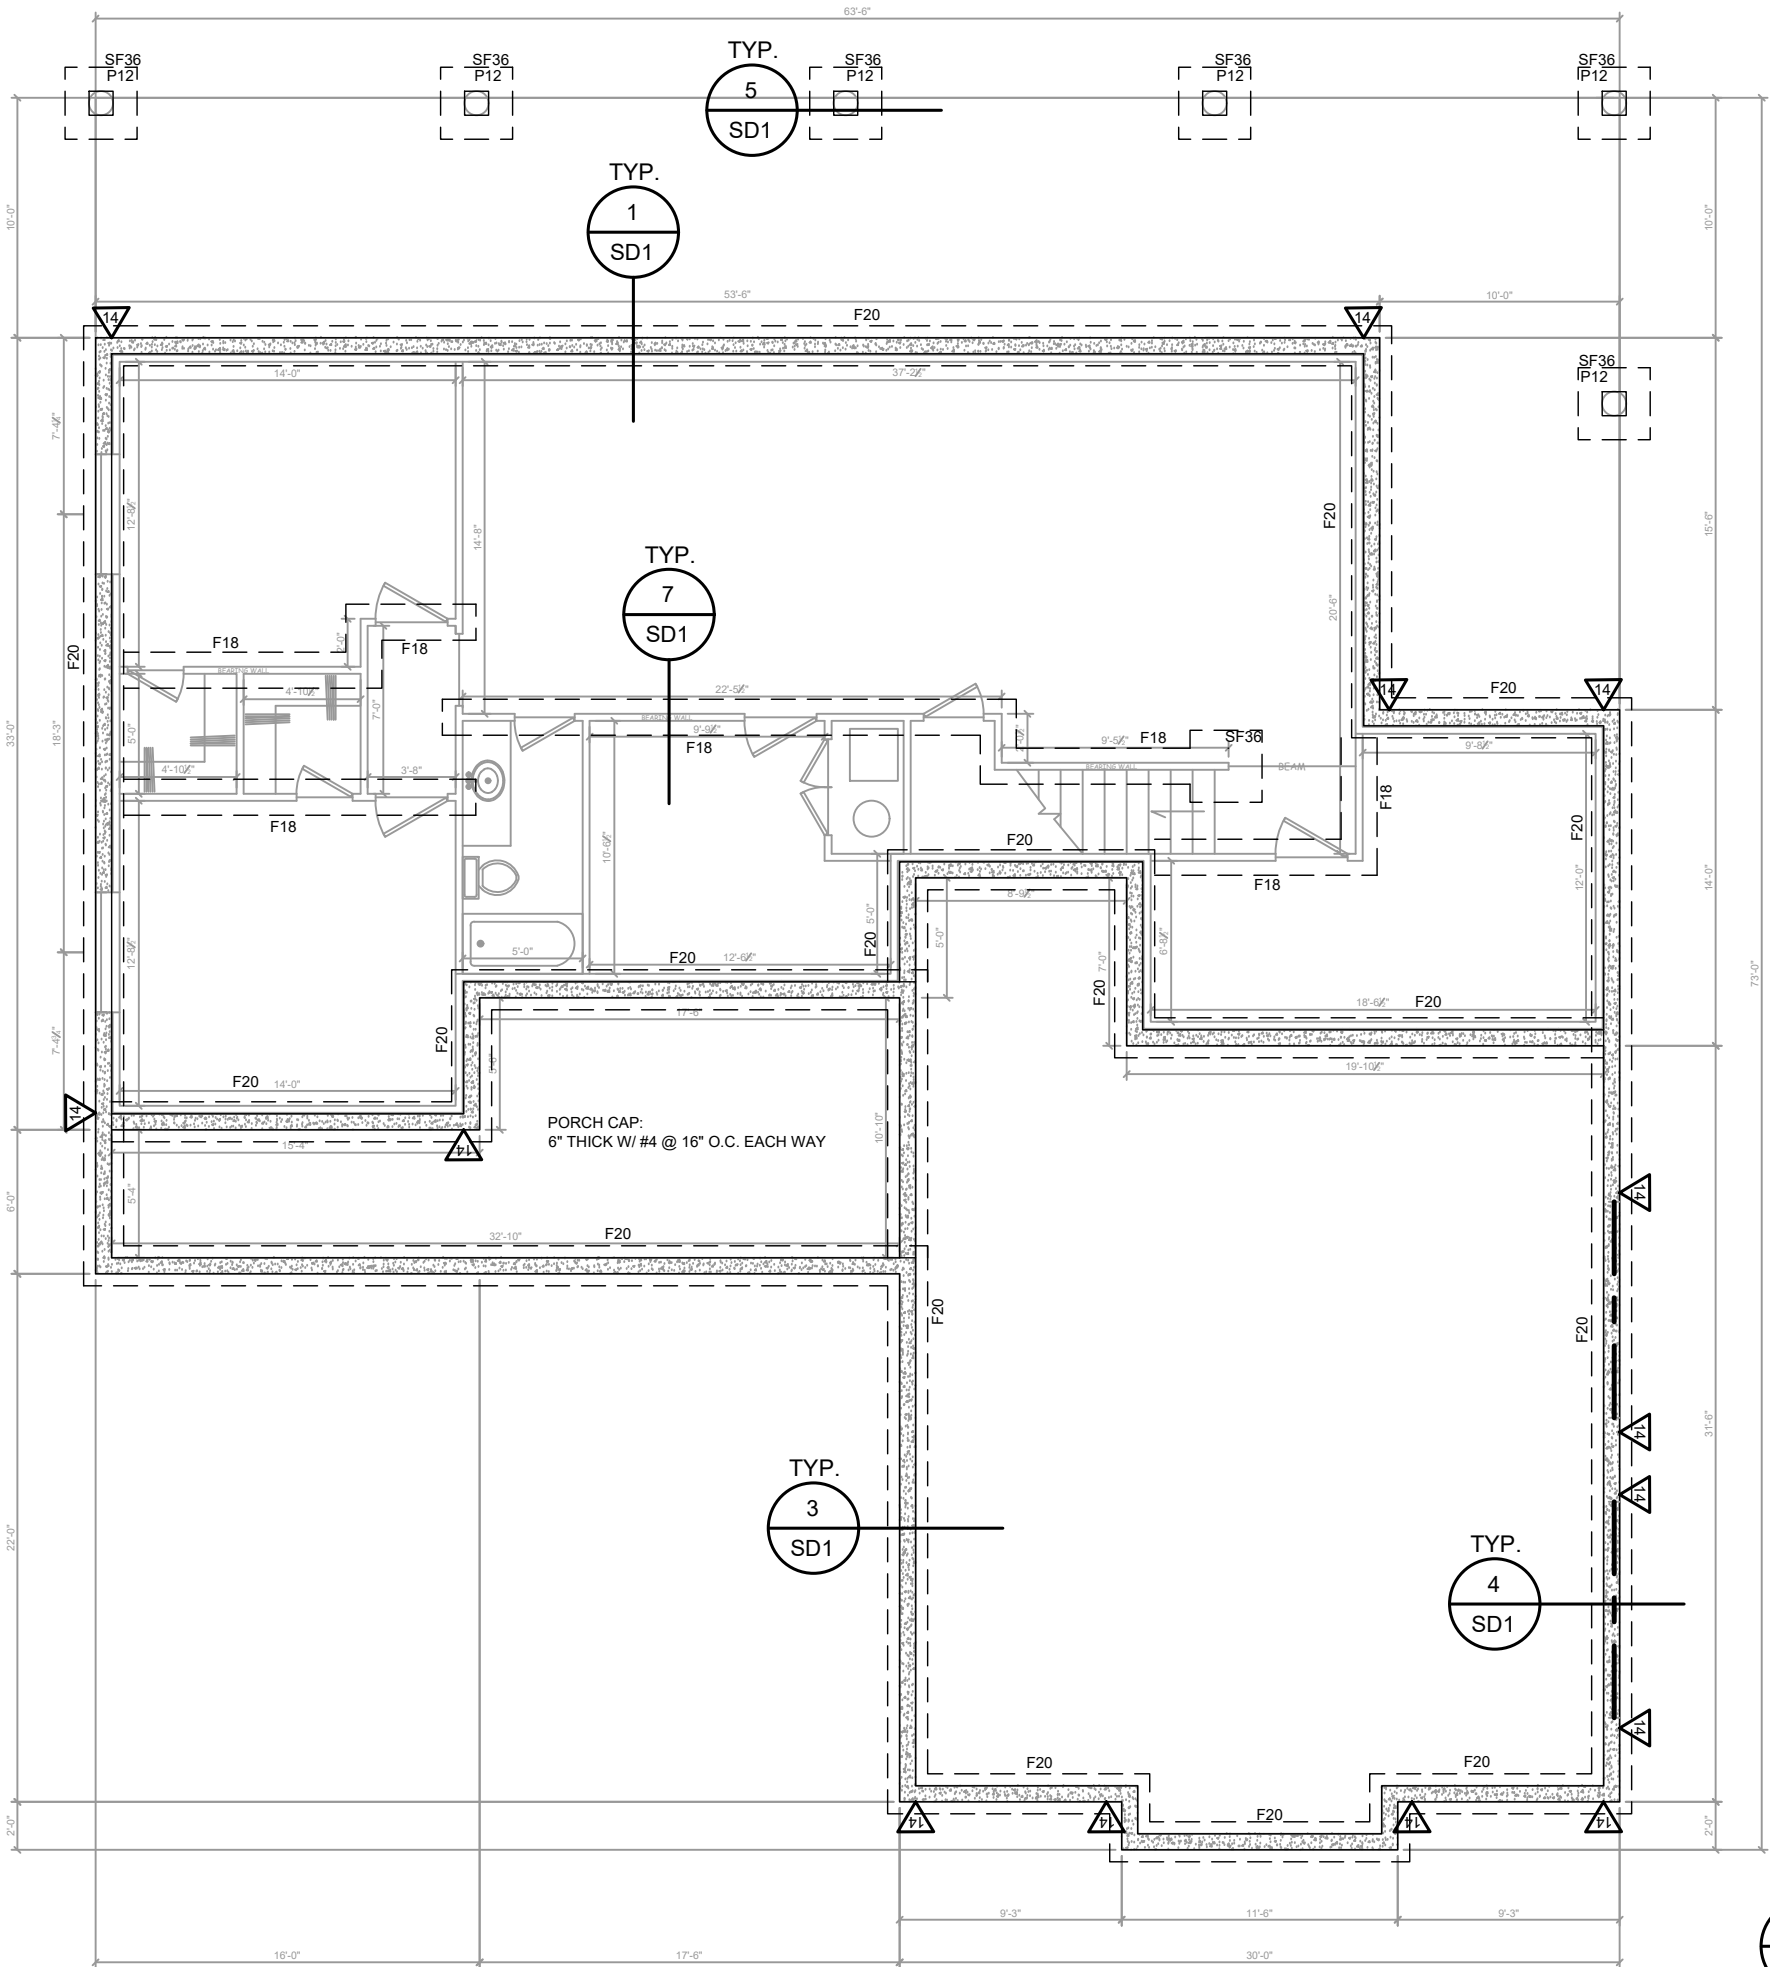

1 #STHD INSTALLATION
S1 NTS

SEE SHEETS SD3 AND SD4 FOR
GENERAL CONSTRUCTION
NOTES AND SCHEDULES

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023



435-515-0126
jackson@whitepineeng.com
tom@whitepineeng.com
P.O. BOX 669
HYDE PARK, UTAH
84318

NO.	DESCRIPTION	DATE

CHRIS FIELD DESIGNS HIBBARD HYDE PARK

378 N 800 E
HYDE PARK, UTAH



DESIGNED BY: J. SAGERS
CHECKED BY: T. HILL
SCALE:
1/8" = 1'-0" (PRINTED ON 11X17)
1/4" = 1'-0" (PRINTED ON 22X34)

SHEET TITLE:

FOUNDATION PLAN
S1

SEE SD3 & SD4 FOR OTHER FRAMING AND SHEAR WALL SPECIFICATIONS NOT LISTED BELOW.

BEAM SCHEDULE

MARK	QUANTITY	PLY SIZE	TYPE
(#)2X6	SEE PLAN	2X6	SAWN
(#)2X8	SEE PLAN	2X8	SAWN
(#)2X10	SEE PLAN	2X10	SAWN
(#)2X12	SEE PLAN	2X12	SAWN
(#)5-1/2	SEE PLAN	1-3/4" X 5-1/2"	LVL
(#)7-1/4	SEE PLAN	1-3/4" X 7-1/4"	LVL
(#)9-1/2	SEE PLAN	1-3/4" X 9-1/2"	LVL
(#)11-7/8	SEE PLAN	1-3/4" X 11-7/8"	LVL
(#)14	SEE PLAN	1-3/4" X 14"	LVL
(#)16	SEE PLAN	1-3/4" X 16"	LVL
(#)18	SEE PLAN	1-3/4" X 18"	LVL
_X_DFRS	(1)	SEE PLAN	TIMBER
_X_GLB	(1)	SEE PLAN	GLULAM
W_X_	(1)	SEE PLAN	STEEL

- ALL SAWN LUMBER SHALL BE DF-L #2 MIN.
- ALL LVL BEAMS SHALL HAVE E=1900 KSI MIN. AND Fb=2600 PSI MIN.
- ALL TIMBER SHALL BE DF-L #1 MIN.
- ALL GLULAM BEAMS SHALL BE WESTERN 24F-V4 MIN.
- ALL STEEL BEAMS SHALL BE ASTM A992 (Fy=50 KSI MIN., Fu=65 KSI MIN.)
- EACH PLY SHALL BE CONTINUOUS ALONG BEAM LENGTH.
- JOIN PLYS TOGETHER W/ (2)16D @ 12" O.C. EACH.
- PROVIDE (1) 2X TRIMMER AND (1) 2X KING STUD FOR BEAMS SPANNING UP TO 4'-0". PROVIDE (2) 2X TRIMMER AND (2) 2X KING STUDS FOR SPANS 4'-1" AND GREATER U.N.O.
- PROVIDE #LCE4 OR 12" LONG #CS16 ROTATED TO 45 DEGREES TO ATTACHED HEADERS TO TRIMMERS ON SPANS 6'-0" AND GREATER.
- ANY BEAM MAY HAVE UP TO A 1" DIA HOLE DRILLED THROUGH, AS LONG AS THE LOCATION OF THE HOLE IS IN THE MIDDLE THIRD OF THE SPAN AND THE MIDDLE THIRD OF THE DEPTH. FOR OTHER SIZES/LOCATIONS, CONTACT THE ENGINEER.
- (BEAM #) SHOWN ON PLANS CORRESPONDS WITH BEAM CALCULATIONS PROVIDED IN THE STRUCTURAL CALCULATION PACKET.

COLUMN SCHEDULE


MARK	APPROX. DIMENSIONS	CAP/BASE TO BEAM	BASE TO CONC.
4X4	3-1/2" X 3-1/2"	#BC4	#ABU44Z
4X6	3-1/2" X 5-1/2"	#BC46	#ABU46Z
6X6	5-1/2" X 5-1/2"	#BC6	#ABU66Z
6X6R	6" X 6"	#BC6R	#ABU66RZ
8X8	7-1/2" X 7-1/2"	#BC8	#ABU88Z
8X8R	8" X 8"	SEE PLAN	#ABU88RZ
10X10	9-1/2" X 9-1/2"	SEE PLAN	#ABU1010Z
10X10R	10" X 10"	SEE PLAN	#ABU1010RZ
12X12	11-1/2" X 11-1/2"	SEE PLAN	#ABU1212Z
12X12R	12" X 12"	SEE PLAN	#ABU1212RZ
HSS_X_X_	STEEL COLUMN PER PLAN	CONNECTION AND BASE PLATE PER PLAN	

- ALL POSTS AND COLUMNS SHALL BE DF-L #1 MIN.
- ALL STEEL HSS COLUMNS SHALL BE ASTM A500 GR. C (Fy=50 KSI MIN., Fu=65 KSI MIN.)

VERTICAL STRAP SCHEDULE

MARK	HOLDOWN	NOTES
16	SIMPSON #CS16	PROVIDE 12" LAP
37	SIMPSON #MST37	PROVIDE (2) 2X STUDS
48	SIMPSON #MST48	PROVIDE (2) 2X STUDS
60	SIMPSON #MST60	PROVIDE (2) 2X STUDS
72	SIMPSON #MST72	PROVIDE (2) 2X STUDS

- FOLLOW INSTALLATION SPECIFICATIONS IN LATEST SIMPSON WOOD CONSTRUCTION CONNECTORS CATALOG.
- WHEN STRAPPING FLOOR TO FLOOR, CENTER STRAP ON RIM JOIST AND NAIL TO STUDS ABOVE AND BELOW.

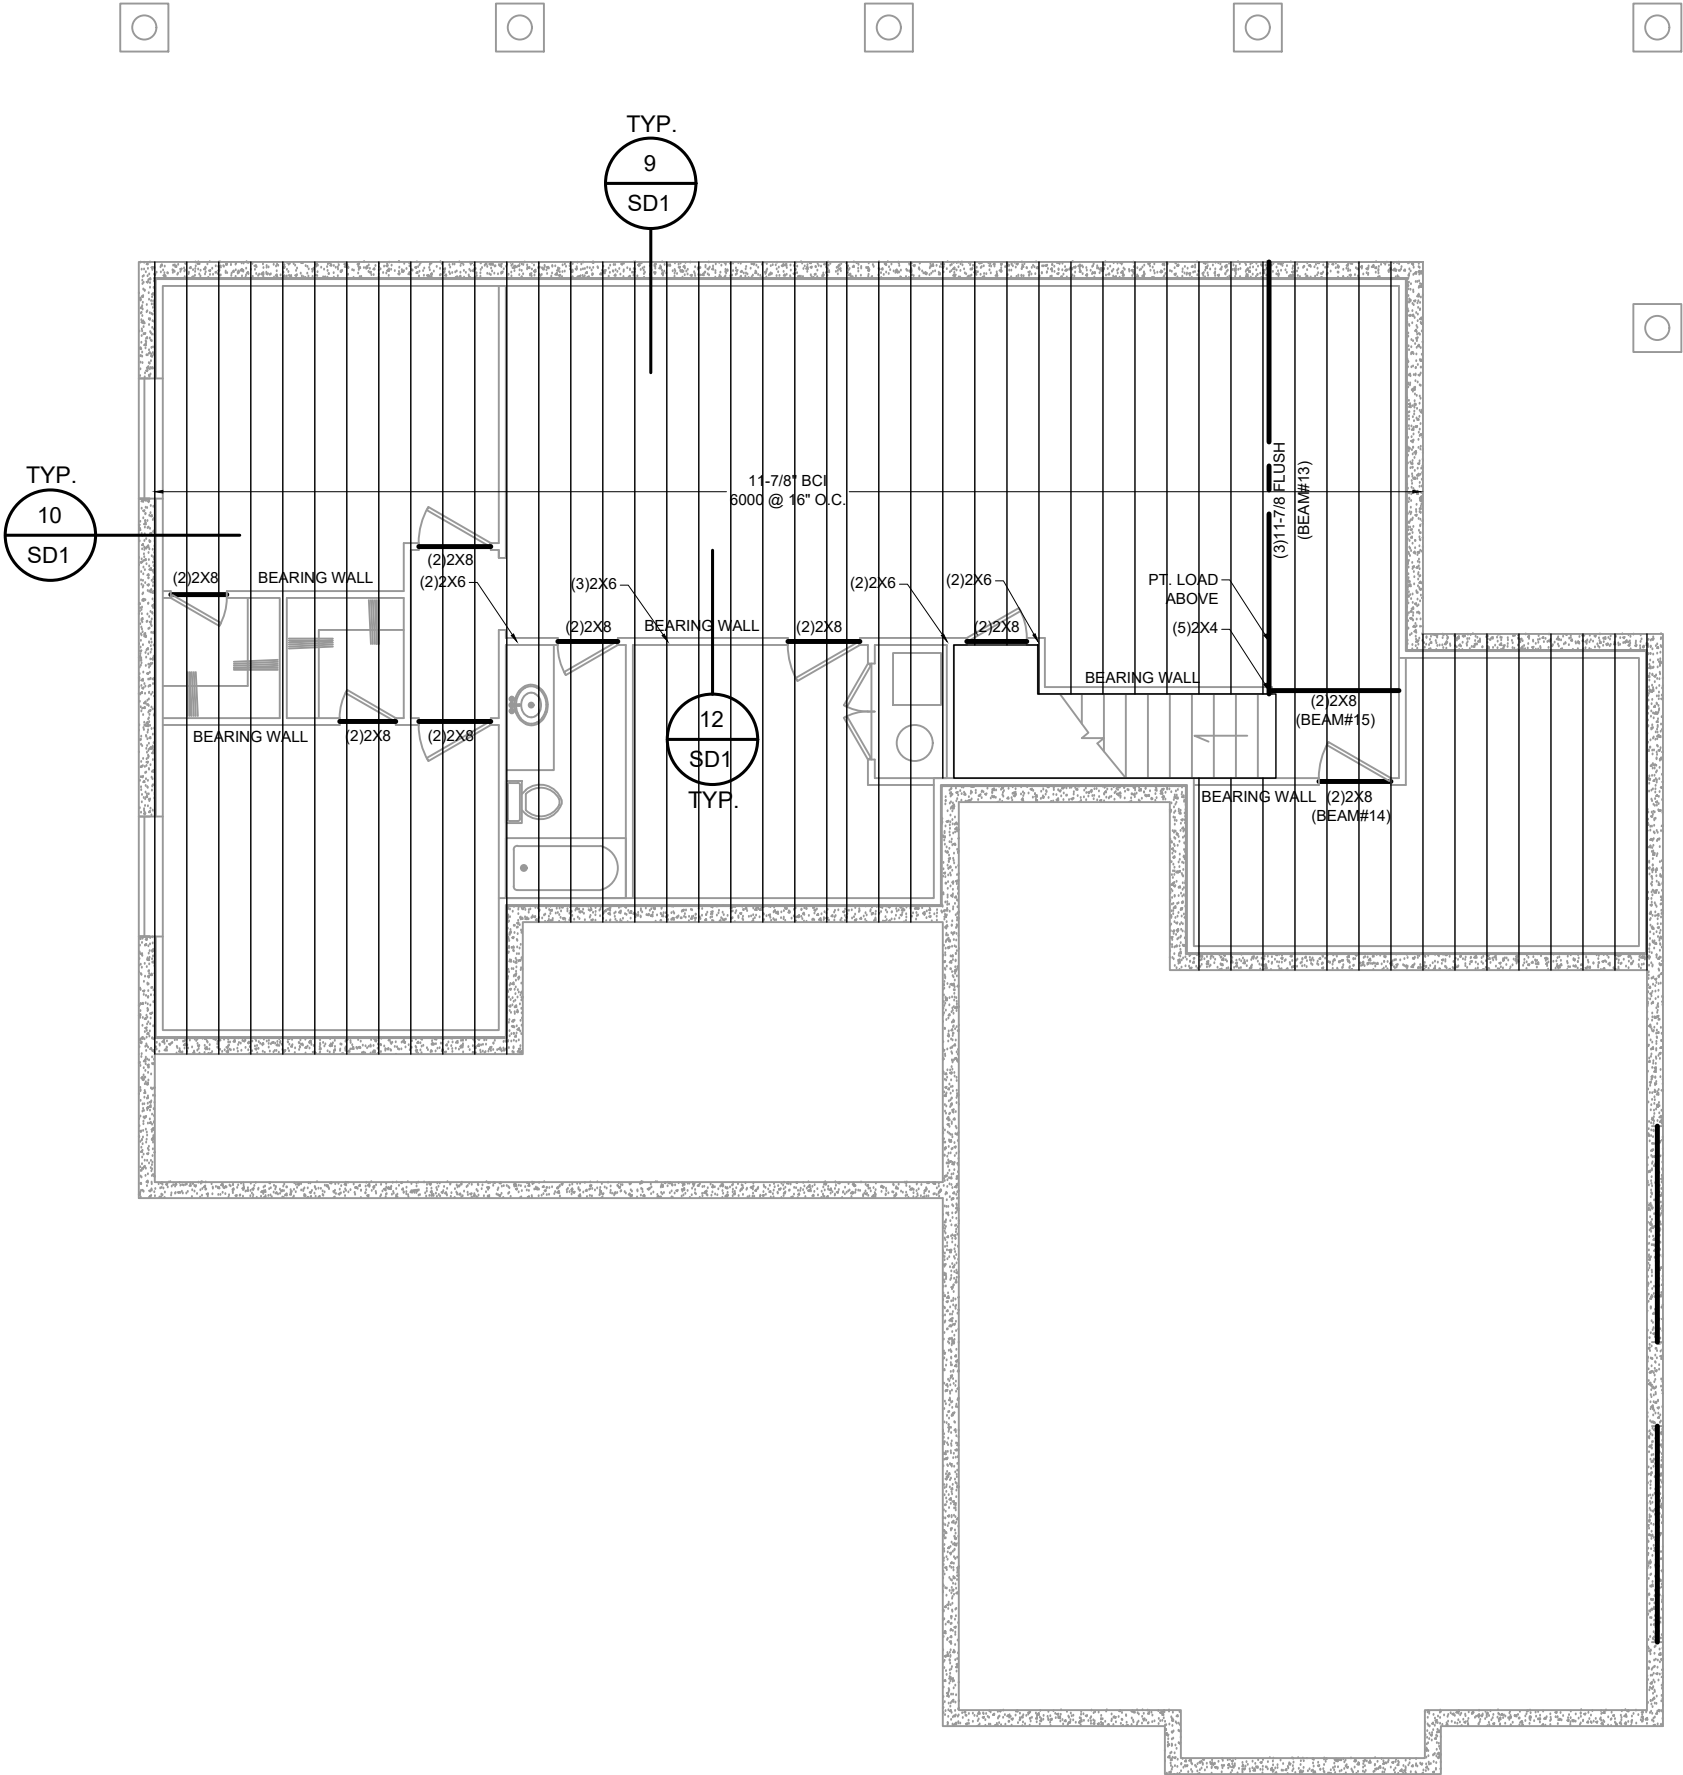

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023




435-515-0126
jackson@whitepineeng.com
tom@whitepineeng.com
P.O. BOX 669
HYDE PARK, UTAH
84318

NO.	DESCRIPTION	DATE

CHRIS FIELD DESIGNS HIBBARD HYDE PARK

378 N 800 E
HYDE PARK, UTAH



DESIGNED BY: J. SAGERS
CHECKED BY: T. HILL
SCALE:
1/8" = 1'-0" (PRINTED ON 11X17)
1/4" = 1'-0" (PRINTED ON 22X34)

SHEET TITLE:
FIRST FLOOR
FRAMING PLAN
S2

SEE SD3 & SD4 FOR OTHER FRAMING AND SHEAR WALL SPECIFICATIONS NOT LISTED BELOW.

BEAM SCHEDULE

MARK	QUANTITY	PLY SIZE	TYPE
(#)2X6	SEE PLAN	2X6	SAWN
(#)2X8	SEE PLAN	2X8	SAWN
(#)2X10	SEE PLAN	2X10	SAWN
(#)2X12	SEE PLAN	2X12	SAWN
(#)5-1/2	SEE PLAN	1-3/4" X 5-1/2"	LVL
(#)7-1/4	SEE PLAN	1-3/4" X 7-1/4"	LVL
(#)9-1/2	SEE PLAN	1-3/4" X 9-1/2"	LVL
(#)11-7/8	SEE PLAN	1-3/4" X 11-7/8"	LVL
(#)14	SEE PLAN	1-3/4" X 14"	LVL
(#)16	SEE PLAN	1-3/4" X 16"	LVL
(#)18	SEE PLAN	1-3/4" X 18"	LVL
_X_DFRS	(1)	SEE PLAN	TIMBER
_X_GLB	(1)	SEE PLAN	GLULAM
W_X_	(1)	SEE PLAN	STEEL

1. ALL SAW LUMBER SHALL BE DF-L #2 MIN.
2. ALL LVL BEAMS SHALL HAVE E=1900 KSI MIN. AND Fb=2600 PSI MIN.
3. ALL TIMBER SHALL BE DF-L #1 MIN.
4. ALL GLULAM BEAMS SHALL BE WESTERN 24F-V4 MIN.
5. ALL STEEL BEAMS SHALL BE ASTM A992 (Fy=50 KSI MIN., Fu=65 KSI MIN.)
6. EACH PLJ SHALL BE CONTINUOUS ALONG BEAM LENGTH.
7. JOIN PLJ'S TOGETHER W/ (2)16D @ 12" O.C. EACH.
8. PROVIDE (1) 2X TRIMMER AND (1) 2X KING STUD FOR BEAMS SPANNING UP TO 4'-0". PROVIDE (2) 2X TRIMMER AND (2) 2X KING STUDS FOR SPANS 4'-1" AND GREATER U.N.O.
9. PROVIDE #4C4 OR 12" LONG #CS16 ROTATED TO 45 DEGREES TO ATTACHED HEADERS TO TRIMMERS ON SPANS 6'-0" AND GREATER.
10. ANY BEAM MAY HAVE UP TO A 1" DIA HOLE DRILLED THROUGH, AS LONG AS THE LOCATION OF THE HOLE IS IN THE MIDDLE THIRD OF THE SPAN AND THE MIDDLE THIRD OF THE DEPTH. FOR OTHER SIZES/LOCATIONS, CONTACT THE ENGINEER.
11. (BEAM #) SHOWN ON PLANS CORRESPONDS WITH BEAM CALCULATIONS PROVIDED IN THE STRUCTURAL CALCULATION PACKET.

COLUMN SCHEDULE


MARK	APPROX. DIMENSIONS	CAP/BASE TO BEAM	BASE TO CONC.
4X4	3-1/2" X 3-1/2"	#BC4	#ABU44Z
4X6	3-1/2" X 5-1/2"	#BC46	#ABU46Z
6X6	5-1/2" X 5-1/2"	#BC6	#ABU66Z
6X6R	6" X 6"	#BC6R	#ABU66RZ
8X8	7-1/2" X 7-1/2"	#BC8	#ABU88Z
8X8R	8" X 8"	SEE PLAN	#ABU88RZ
10X10	9-1/2" X 9-1/2"	SEE PLAN	#ABU1010Z
10X10R	10" X 10"	SEE PLAN	#ABU1010RZ
12X12	11-1/2" X 11-1/2"	SEE PLAN	#ABU1212Z
12X12R	12" X 12"	SEE PLAN	#ABU1212RZ
HSS_X_X_X	STEEL COLUMN PER PLAN	CONNECTION AND BASE PLATE PER PLAN	

1. ALL POSTS AND COLUMNS SHALL BE DF-L #1 MIN.
2. ALL STEEL HSS COLUMNS SHALL BE ASTM A500 GR. C (Fy=50 KSI MIN., Fu=65 KSI MIN.)

VERTICAL STRAP SCHEDULE

MARK	HOLDOWN	NOTES
16	SIMPSON #CS16	PROVIDE 12" LAP
37	SIMPSON #MST37	PROVIDE (2) 2X STUDS
48	SIMPSON #MST48	PROVIDE (2) 2X STUDS
60	SIMPSON #MST60	PROVIDE (2) 2X STUDS
72	SIMPSON #MST72	PROVIDE (2) 2X STUDS

1. FOLLOW INSTALLATION SPECIFICATIONS IN LATEST SIMPSON WOOD CONSTRUCTION CONNECTORS CATALOG.
2. WHEN STRAPPING FLOOR TO FLOOR, CENTER STRAP ON RIM JOIST AND NAIL TO STUDS ABOVE AND BELOW.

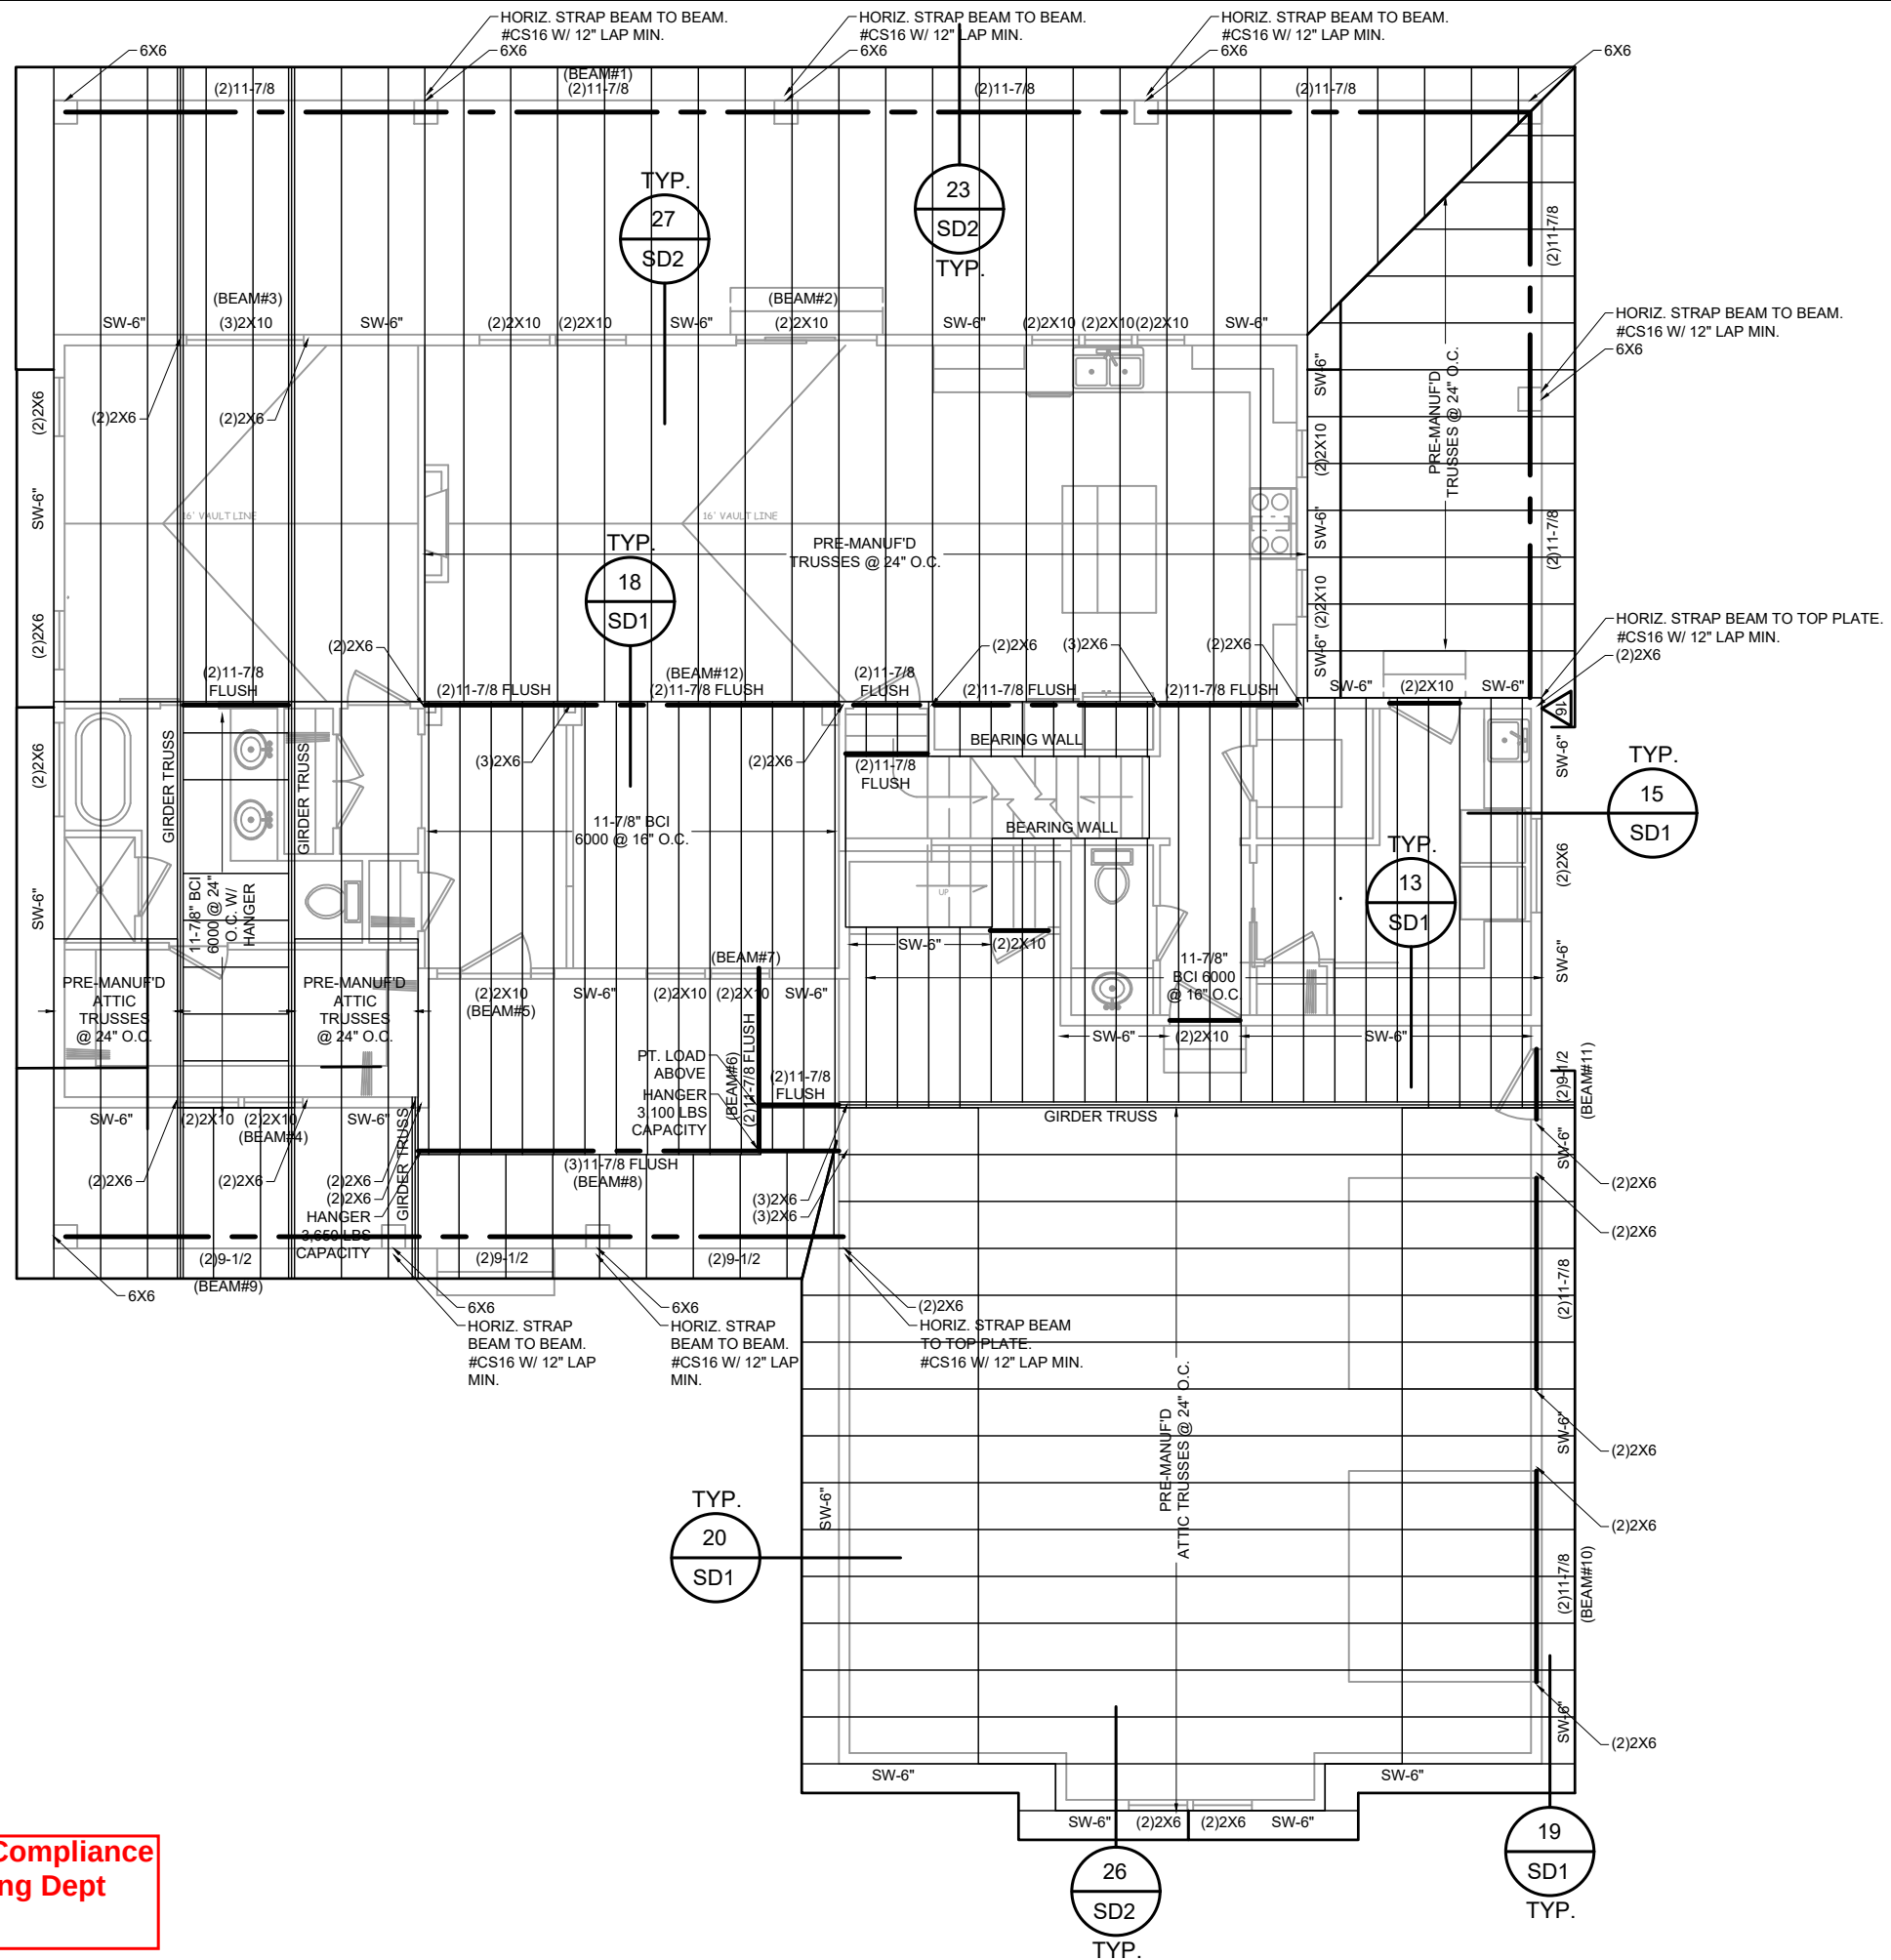

435-515-0126
jackson@whitepineeng.com
tom@whitepineeng.com

P.O. BOX 669
HYDE PARK, UTAH
84318

NO.	DESCRIPTION	DATE

CHRIS FIELD DESIGNS HIBBARD HYDE PARK

378 N 800 E
HYDE PARK, UTAH



DESIGNED BY: J. SAGERS

CHECKED BY: T. HILL

SCALE:

1/8" = 1'-0" (PRINTED ON 11X17)

1/4" = 1'-0" (PRINTED ON 22X34)

SHEET TITLE:

SECOND FLOOR FRAMING PLAN

S3

SEE SD3 & SD4 FOR OTHER FRAMING AND SHEAR WALL SPECIFICATIONS NOT LISTED BELOW.

BEAM SCHEDULE

MARK	QUANTITY	PLY SIZE	TYPE
(#)2X6	SEE PLAN	2X6	SAWN
(#)2X8	SEE PLAN	2X8	SAWN
(#)2X10	SEE PLAN	2X10	SAWN
(#)2X12	SEE PLAN	2X12	SAWN
(#)5-1/2	SEE PLAN	1-3/4" X 5-1/2"	LVL
(#)7-1/4	SEE PLAN	1-3/4" X 7-1/4"	LVL
(#)9-1/2	SEE PLAN	1-3/4" X 9-1/2"	LVL
(#)11-7/8	SEE PLAN	1-3/4" X 11-7/8"	LVL
(#)14	SEE PLAN	1-3/4" X 14"	LVL
(#)16	SEE PLAN	1-3/4" X 16"	LVL
(#)18	SEE PLAN	1-3/4" X 18"	LVL
_X_DFRS	(1)	SEE PLAN	TIMBER
_X_GLB	(1)	SEE PLAN	GLULAM
W_X_	(1)	SEE PLAN	STEEL

- ALL SAWN LUMBER SHALL BE DF-L #2 MIN.
- ALL LVL BEAMS SHALL HAVE E=1900 KSI MIN. AND Fb=2600 PSI MIN.
- ALL TIMBER SHALL BE DF-L #1 MIN.
- ALL GLULAM BEAMS SHALL BE WESTERN 24F-V4 MIN.
- ALL STEEL BEAMS SHALL BE ASTM A992 (Fy=50 KSI MIN., Fu=65 KSI MIN.)
- EACH PLY SHALL BE CONTINUOUS ALONG BEAM LENGTH.
- JOIN PLYS TOGETHER W/ (2)16D @ 12" O.C. EACH.
- PROVIDE (1) 2X TRIMMER AND (1) 2X KING STUD FOR BEAMS SPANNING UP TO 4'-0". PROVIDE (2) 2X TRIMMER AND (2) 2X KING STUDS FOR SPANS 4'-1" AND GREATER U.N.O.
- PROVIDE #LCE4 OR 12" LONG #CS16 ROTATED TO 45 DEGREES TO ATTACHED HEADERS TO TRIMMERS ON SPANS 6'-0" AND GREATER.
- ANY BEAM MAY HAVE UP TO A 1" DIA HOLE DRILLED THROUGH, AS LONG AS THE LOCATION OF THE HOLE IS IN THE MIDDLE THIRD OF THE SPAN AND THE MIDDLE THIRD OF THE DEPTH. FOR OTHER SIZES/LOCATIONS, CONTACT THE ENGINEER.
- (BEAM #) SHOWN ON PLANS CORRESPONDS WITH BEAM CALCULATIONS PROVIDED IN THE STRUCTURAL CALCULATION PACKET.

COLUMN SCHEDULE


MARK	APPROX. DIMENSIONS	CAP/BASE TO BEAM	BASE TO CONC.
4X4	3-1/2" X 3-1/2"	#BC4	#ABU44Z
4X6	3-1/2" X 5-1/2"	#BC46	#ABU46Z
6X6	5-1/2" X 5-1/2"	#BC6	#ABU66Z
6X6R	6" X 6"	#BC6R	#ABU66RZ
8X8	7-1/2" X 7-1/2"	#BC8	#ABU88Z
8X8R	8" X 8"	SEE PLAN	#ABU88RZ
10X10	9-1/2" X 9-1/2"	SEE PLAN	#ABU1010Z
10X10R	10" X 10"	SEE PLAN	#ABU1010RZ
12X12	11-1/2" X 11-1/2"	SEE PLAN	#ABU1212Z
12X12R	12" X 12"	SEE PLAN	#ABU1212RZ
HSS_X_X_	STEEL COLUMN PER PLAN	CONNECTION AND BASE PLATE PER PLAN	

- ALL POSTS AND COLUMNS SHALL BE DF-L #1 MIN.
- ALL STEEL HSS COLUMNS SHALL BE ASTM A500 GR. C (Fy=50 KSI MIN., Fu=65 KSI MIN.)

VERTICAL STRAP SCHEDULE

MARK	HOLDOWN	NOTES
16	SIMPSON #CS16	PROVIDE 12" LAP
37	SIMPSON #MST37	PROVIDE (2) 2X STUDS
48	SIMPSON #MST48	PROVIDE (2) 2X STUDS
60	SIMPSON #MST60	PROVIDE (2) 2X STUDS
72	SIMPSON #MST72	PROVIDE (2) 2X STUDS

- FOLLOW INSTALLATION SPECIFICATIONS IN LATEST SIMPSON WOOD CONSTRUCTION CONNECTORS CATALOG.
- WHEN STRAPPING FLOOR TO FLOOR, CENTER STRAP ON RIM JOIST AND NAIL TO STUDS ABOVE AND BELOW.

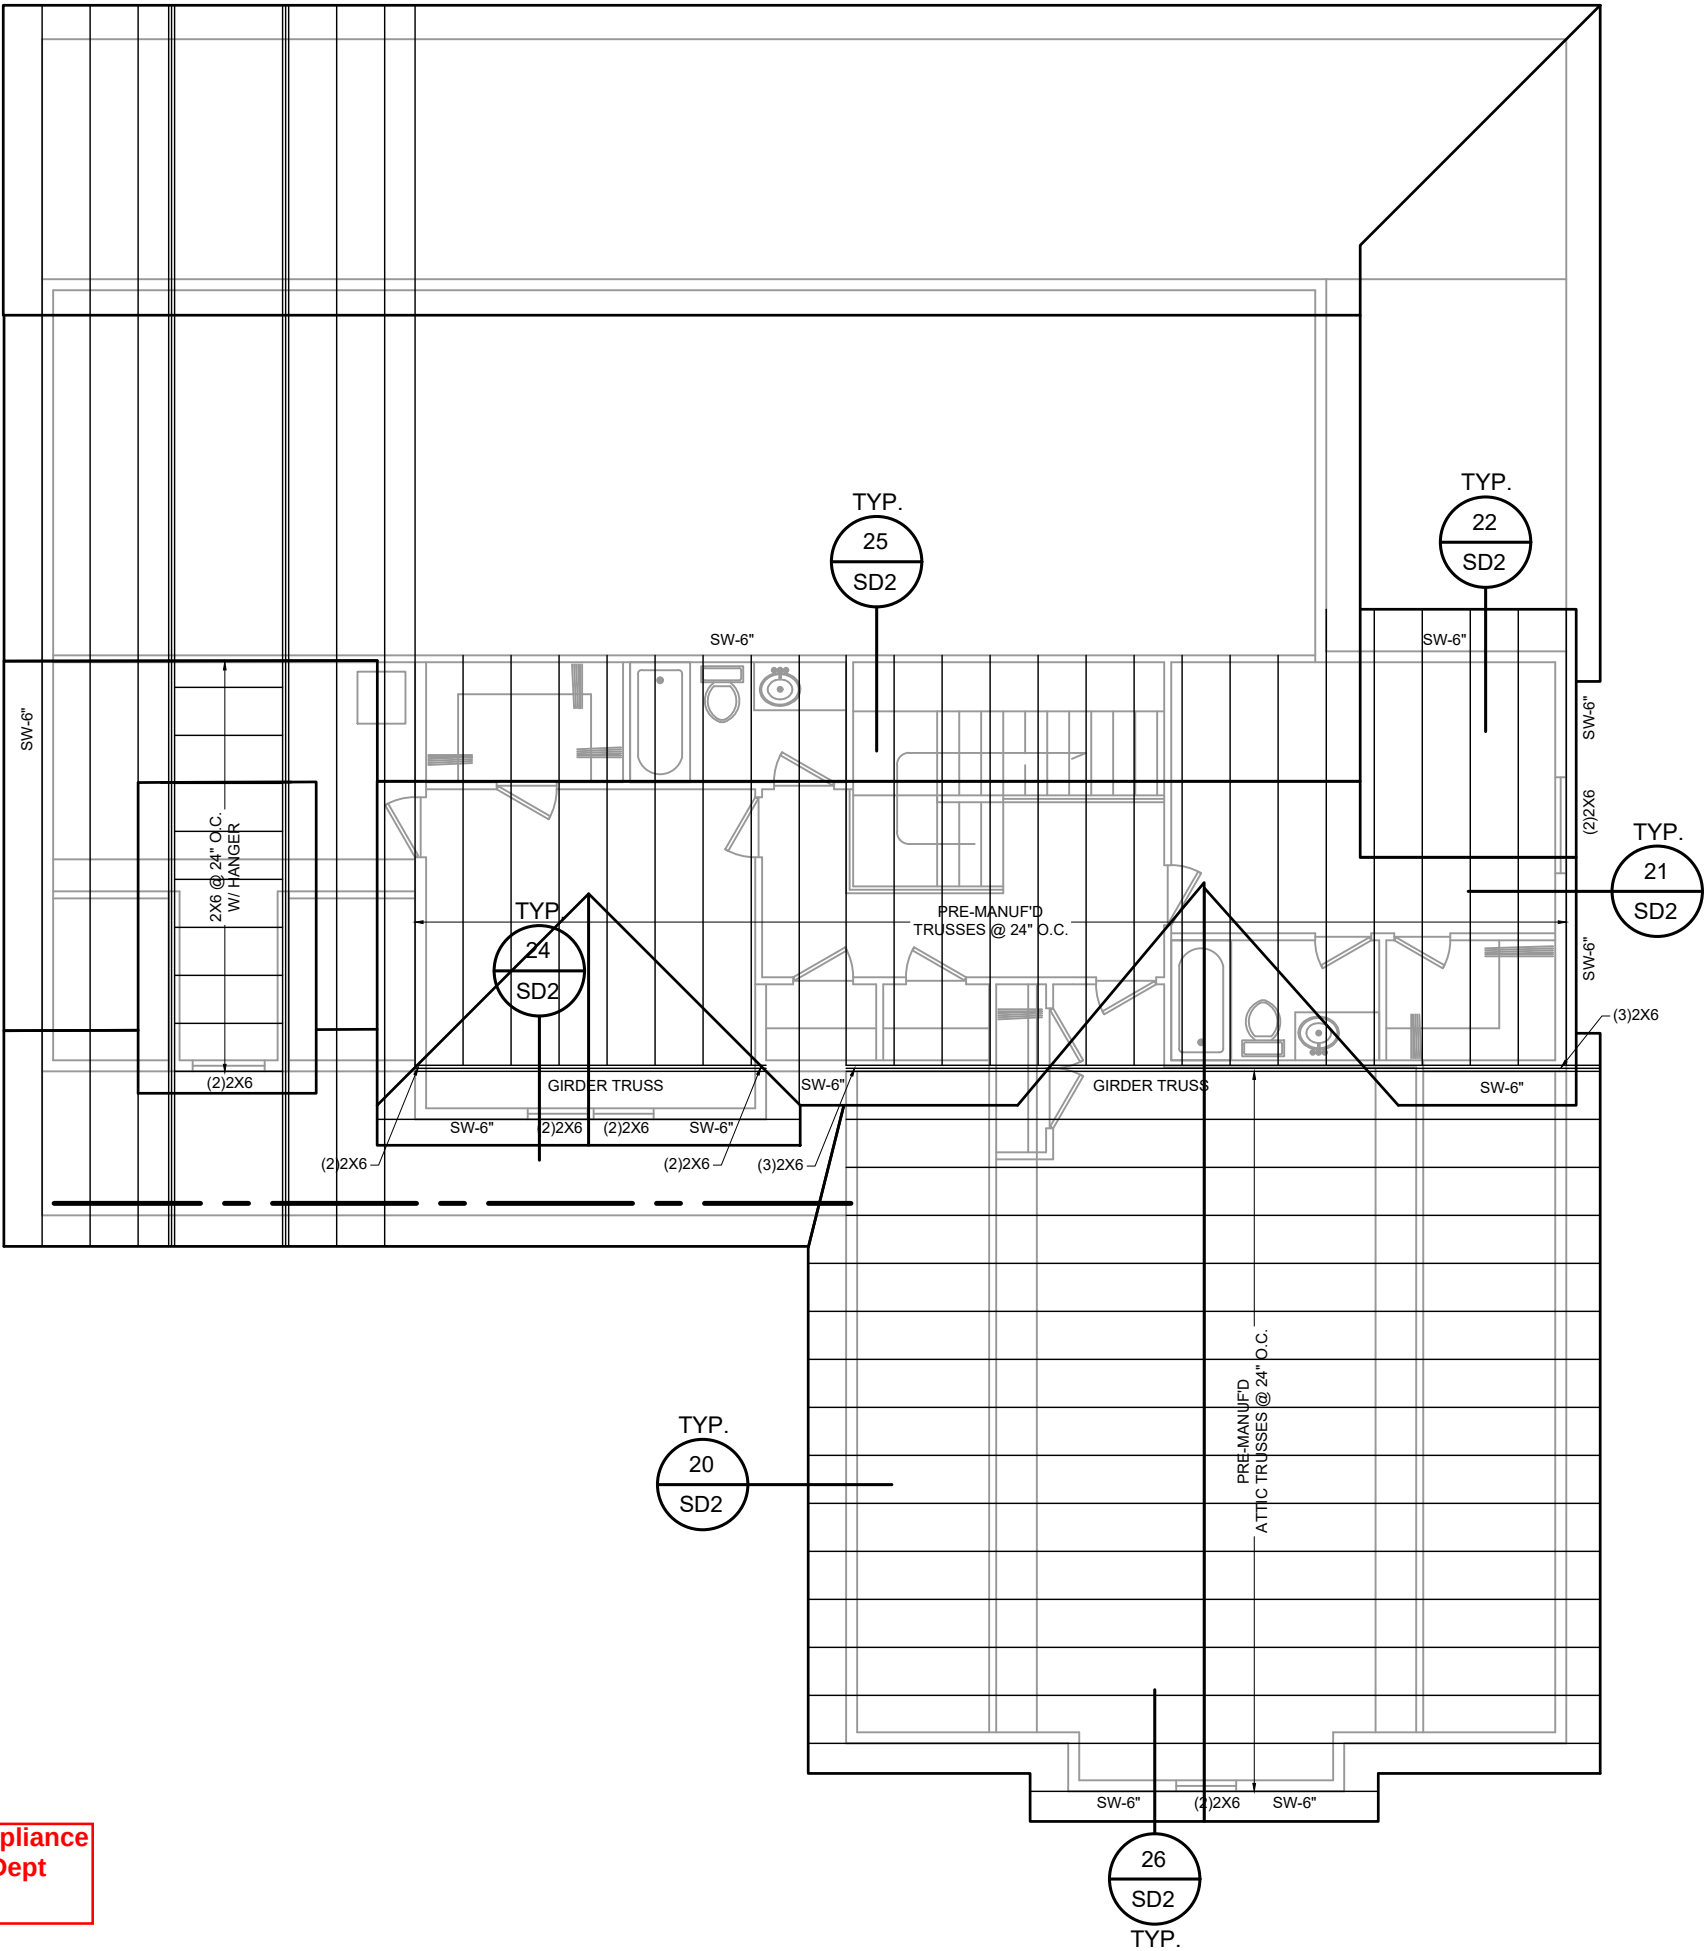

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023



NO.	DESCRIPTION	DATE

CHRIS FIELD DESIGNS HIBBARD HYDE PARK


378 N 800 E
HYDE PARK, UTAH



DESIGNED BY: J. SAGERS
CHECKED BY: T. HILL
SCALE:
1/8" = 1'-0" (PRINTED ON 11X17)
1/4" = 1'-0" (PRINTED ON 22X34)


SHEET TITLE:
ROOF FRAMING PLAN

S4

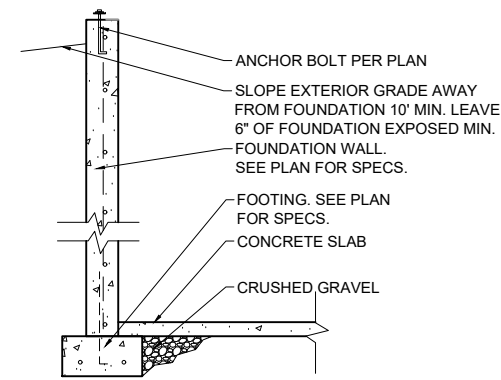


1 FOUNDATION WALL
SD1 NTS


2 NOT APPLICABLE
SD1 NTS

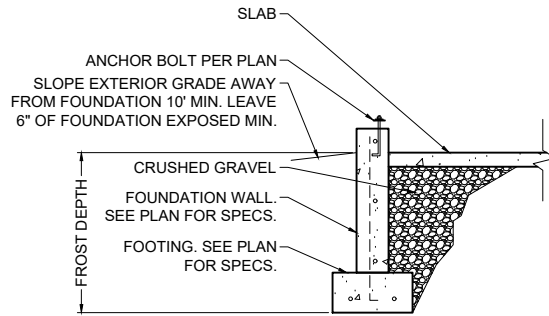


3 GARAGE FOUNDATION
SD1 NTS

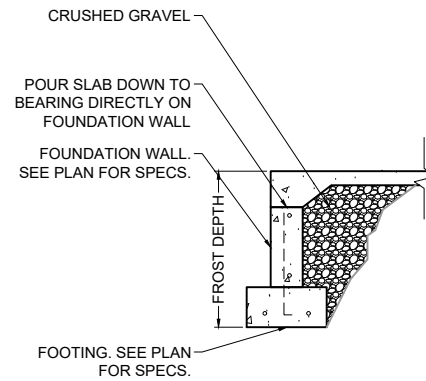

4 FOUNDATION BLOCK OUT
SD1 NTS

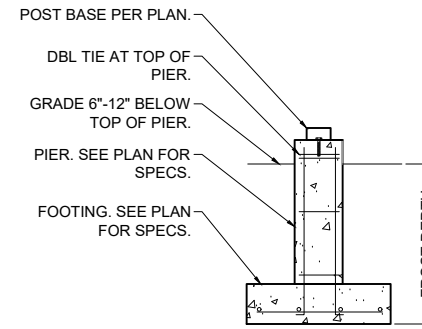


5 PIER
SD1 NTS




7 INTERIOR BEARING WALL
SD1 NTS

6 NOT APPLICABLE
SD1 NTS


8 NOT APPLICABLE
SD1 NTS

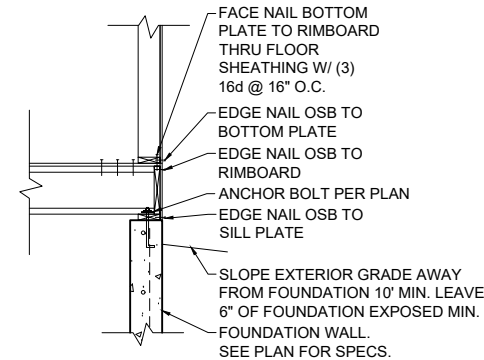

9 PERP. FLOOR JOISTS
SD1 NTS

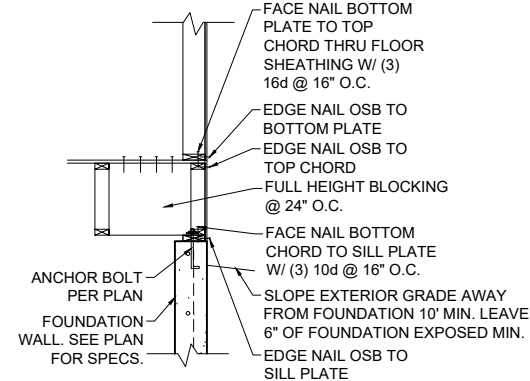


10 PARA. FLOOR JOISTS
SD1 NTS

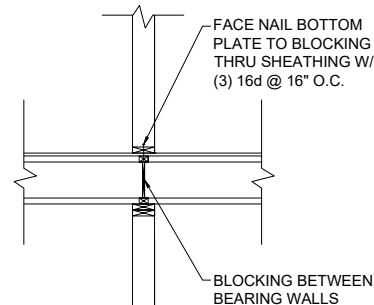


12 BEARING WALL
SD1 NTS


11 NOT APPLICABLE
SD1 NTS

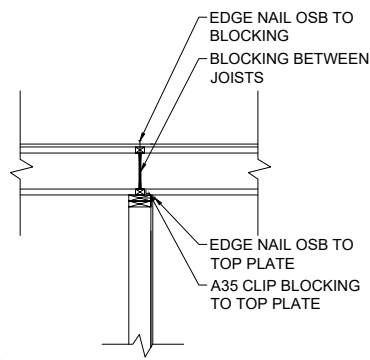


13 INTERIOR SHEAR WALL
SD1 NTS

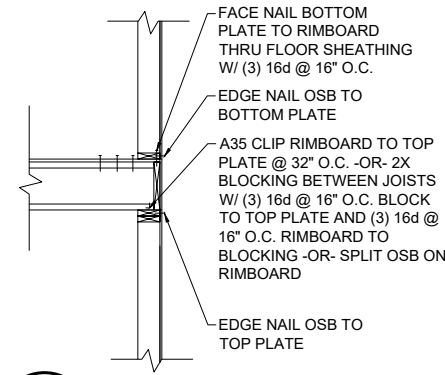


14 PERP. FLOOR JOISTS
SD1 NTS

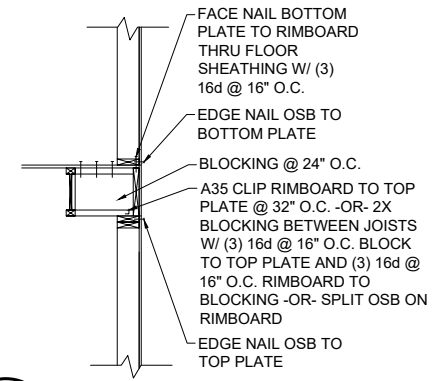


15 PARA. FLOOR JOISTS
SD1 NTS

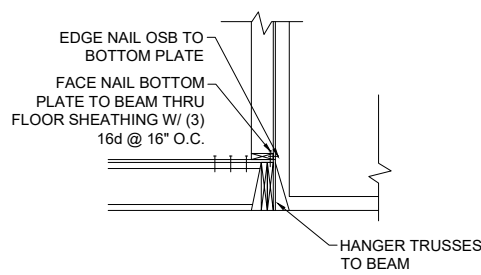

18 FRAMING SECTION
SD1 NTS

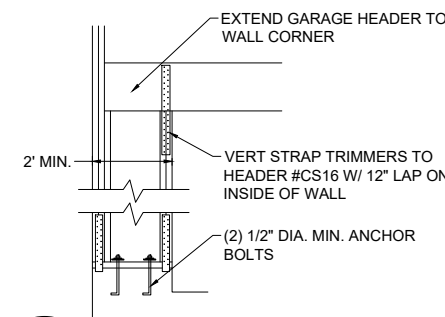

19 GARAGE RETURN SW
SD1 NTS

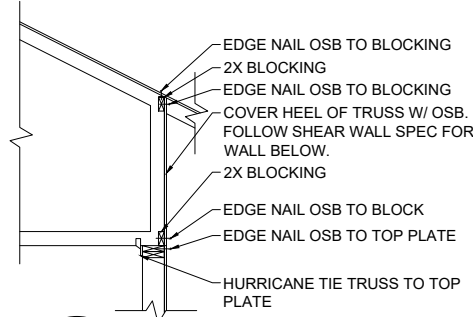

20 WALL TO TRUSSES
SD1 NTS

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

16 NOT APPLICABLE
SD1 NTS

17 NOT APPLICABLE
SD1 NTS




435-515-0126
jackson@whitepineeng.com
tom@whitepineeng.com
P.O. BOX 669
HYDE PARK, UTAH
84318

NO.	DESCRIPTION	DATE


CHRIS FIELD DESIGNS HIBBARD HYDE PARK

378 N 800 E
HYDE PARK, UTAH




DESIGNED BY: J. SAGERS
CHECKED BY: T. HILL
SCALE:
1/8" = 1'-0" (PRINTED ON 11X17)
1/4" = 1'-0" (PRINTED ON 22X34)


SHEET TITLE:
STRUCTURAL DETAILS
SD1

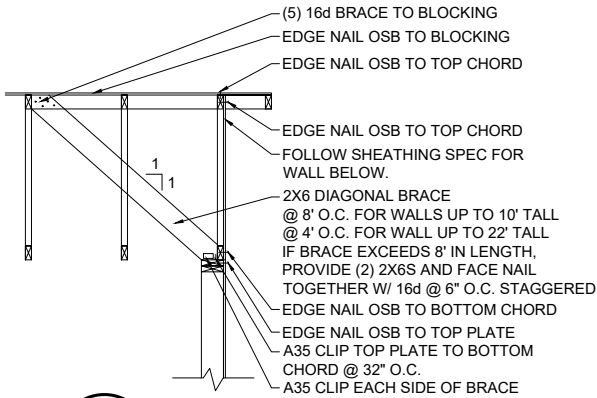


21 PARA. ROOF TRUSS
SD2 NTS

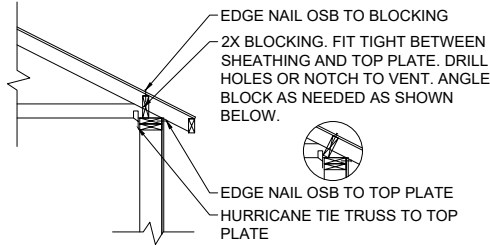


22 PERP. ROOF TRUSS
SD2 NTS

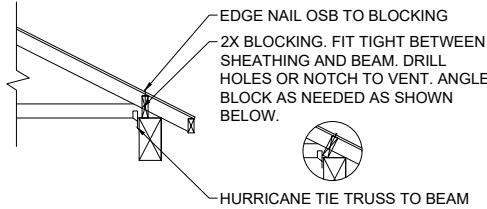


23 PERP. ROOF TRUSS
SD2 NTS

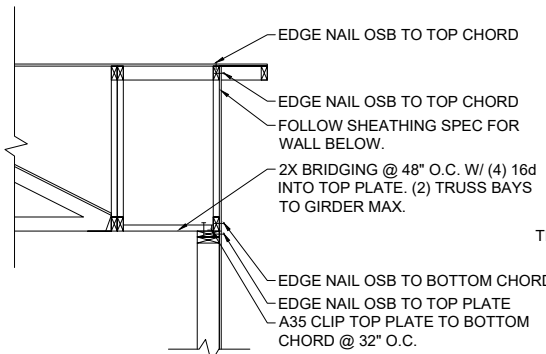


24 PARA. ROOF TRUSS
SD2 NTS

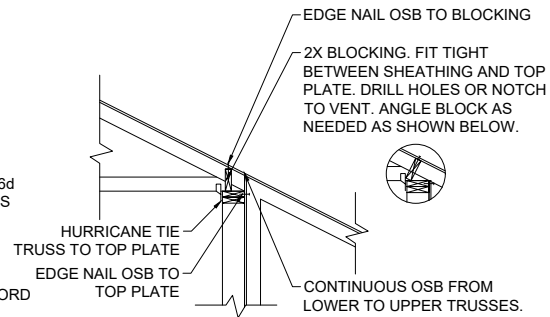


25 PERP. ROOF TRUSS
SD2 NTS

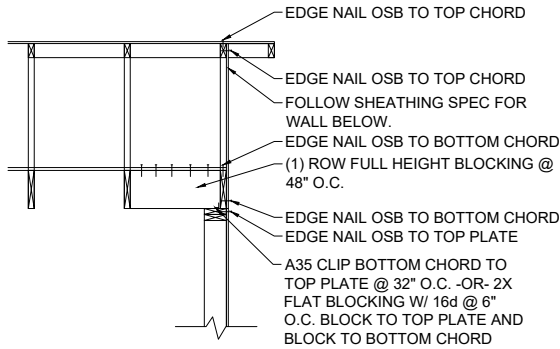


26 PARA. ROOF TRUSS
SD2 NTS

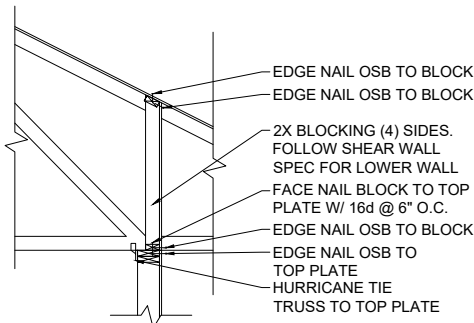


27 PERP. ROOF TRUSS
SD2 NTS



PLAN VIEW

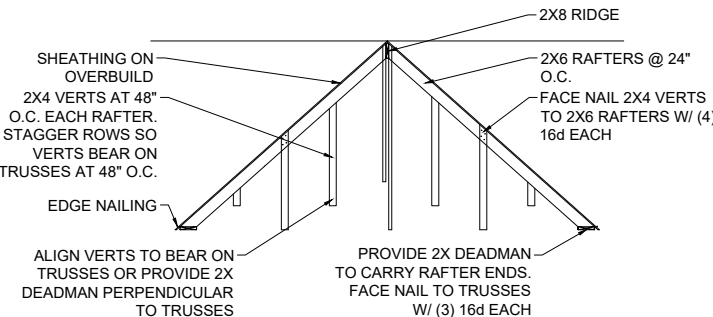

OVERBUILD FRAMING

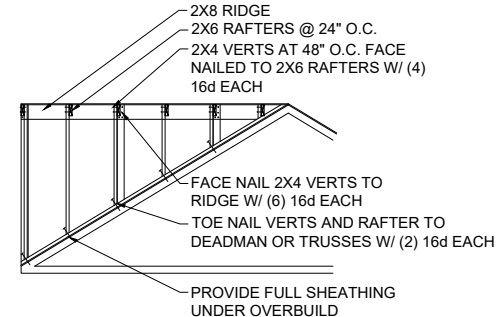


435-515-0126
jackson@whitepineeng.com
tom@whitepineeng.com

P.O. BOX 669
HYDE PARK, UTAH
84318

NO.	DESCRIPTION	DATE

CHRIS FIELD DESIGNS HIBBARD HYDE PARK

378 N 800 E
HYDE PARK, UTAH



DESIGNED BY: J. SAGERS

CHECKED BY: T. HILL

SCALE:

1/8" = 1'-0" (PRINTED ON 11X17)

1/4" = 1'-0" (PRINTED ON 22X34)

SHEET TITLE:

STRUCTURAL DETAILS

SD2

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023

DESIGN CRITERIA:

RISK CATEGORY: II
DESIGN RISK CATEGORY: II
SNOW LOAD IMPORTANCE FACTOR (I_s): 1.0
SEISMIC IMPORTANCE FACTOR (I_e): 1.0

SEISMIC LOADS

S_s: 0.32
S_{M_i}: 0.79
S_{M_s}: 1.23
T_L: 6
R: 6.5
SITE CLASS: D (ASSUMED)
SDC: D

WIND LOADS

V (3 SEC GUST): 120 MPH
EXPOSURE CATEGORY: C
ELEVATION: 4917 FT

SNOW LOADS

P_G: 53 PSF
W_S: 7 PSF
C_e: 1.0
C_T: 1.0
C_S: 1.0
P_E: 37 PSF
P_S: 37 PSF

DEAD LOADS

ROOF: 15 PSF
FLOOR: 15 PSF
WALLS: 10 PSF
DECKS: 10 PSF
CONCRETE: 145 PSF

LIVE LOADS

ROOF: 20 PSF
FLOOR: 40 PSF
BEDROOM: 30 PSF
DECK: 60 PSF
GARAGE: 40 PSF

SOIL LOADS AND VALUES (ASSUMED):

SOIL BEARING PRESSURE: 1500 PSF
ACTIVE PRESSURE: 35 PCF
PASSIVE PRESSURE: 250 PCF
AT-REST PRESSURE: 60 PCF
*SEE NOTES FOR SOIL ASSUMPTIONS AS FOUND IN THE CONCRETE FOOTINGS & FOUNDATIONS SECTION, THIS PAGE
**ENGINEER ASSUMES STABLE SOIL CONDITIONS. IF THERE ARE ANY GLOBAL STABILITY CONCERNS, A GEOTECHNICAL REPORT IS REQUIRED.

GENERAL CONSTRUCTION NOTES:

- ALL CONSTRUCTION WORK SHALL FOLLOW THE STANDARDS FOUND IN THE INTERNATIONAL BUILDING CODE (IBC 2021), INTERNATIONAL RESIDENTIAL CODE (IRC 2021), AND THE NATIONAL DESIGN SPECIFICATIONS FOR WOOD CONSTRUCTION (NDS 2018).
- THE ENGINEERED DRAWINGS PROVIDED HEREIN WERE COMPLETED USING THE PROFESSIONAL STANDARD OF CARE REQUIRED BY THE GOVERNING MUNICIPALITY AND/OR STATE. THESE DRAWINGS, HOWEVER, DO NOT AND CAN NOT PROVIDE EVERY EXPLICIT ELEMENT OR CONDITION OF THE STRUCTURE. AS SUCH, CONTRACTOR SHALL PROVIDE INDUSTRY STANDARD GOOD CARE AND PRACTICE FOR MISCELLANEOUS ELEMENTS NOT SHOWN ON PLANS AND SHALL CONTACT ENGINEER FOR FURTHER INFORMATION IF REQUIRED.
- STRUCTURAL ENGINEERING PROVIDED HEREIN ASSUMES FINAL CONSTRUCTED CONDITION. CONTRACTOR SHALL BE RESPONSIBLE FOR STRUCTURAL INTEGRITY OF UNFINISHED STRUCTURE DURING ALL STAGES OF CONSTRUCTION. CONSTRUCTION LOADS SHALL NOT EXCEED DESIGN LIVE LOADS SHOWN IN DESIGN CRITERIA. CONTRACTOR SHALL PROVIDE BRACING OR SHORING AS NECESSARY TO SUPPORT UNFINISHED STRUCTURE.
- WHITE PINE ENGINEERING (WPE) ASSUMES NO LIABILITY FOR THE MEANS AND METHODS OF CONSTRUCTION PRACTICES. CONTRACTOR IS RESPONSIBLE FOR ALL MEANS OF CONSTRUCTION AND FOR JOBSITE SAFETY PER OSHA REGULATIONS
- CONTRACTOR SHALL BE RESPONSIBLE FOR RECEIVING APPROVAL AND ANY NECESSARY PERMITS FROM THE GOVERNING MUNICIPALITY PRIOR TO BEGINNING OF CONSTRUCTION.
- ANY OBSERVATIONS PROVIDED BY WPE DURING CONSTRUCTION SHALL BE CONSIDERED OBSERVATIONS LIMITED TO THE SCOPE REQUESTED, AND NOT FULL INSPECTIONS OR APPROVAL. THE GOVERNING MUNICIPALITY SHALL BE SOLELY RESPONSIBLE FOR INSPECTIONS AND APPROVAL OF FINAL CONSTRUCTION.
- CONTRACTOR SHALL INFORM ENGINEER OF ANY DISCREPANCIES BETWEEN ACTUAL CONDITIONS AND CONDITIONS ASSUMED ON THESE PLANS (I.E. DIMENSIONS, MATERIALS, ASSUMED LOADS, ETC).
- SHOP DRAWINGS FOR ANY PREMANUFACTURED STRUCTURAL ELEMENTS SHALL BE STAMPED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF CONSTRUCTION AND SHALL BE SUBMITTED TO THE ENGINEER OF RECORD TO REVIEW IF DIMENSIONS OR OTHER ASPECTS OF SHOP DRAWINGS DIFFER FROM THOSE ON THESE PLANS.

CONCRETE FOOTINGS, FOUNDATIONS, AND SLABS

NOTES:

- CONCRETE SHALL MEET REQUIREMENTS OUTLINED IN THE BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE (ACI318-19)
- LOTS SHALL BE GRADED TO DRAIN SURFACE WATER AWAY FROM ALL FOUNDATION WALLS. THE GRADE SHALL FALL A MINIMUM OF 6 IN WITHIN THE FIRST 10 FT DISTANCE FROM THE BUILDING.
- IMPERVIOUS SURFACES (I.E. CONCRETE, ASPHALT) SHALL BE SLOPED A MINIMUM OF 2% AWAY FROM THE BUILDING
- CONTRACTOR SHALL DAMP PROOF ALL CONCRETE WALLS THAT RETAIN EARTH OR HAVE ENCLOSED USABLE SPACES BY PLACING A BITUMINOUS COATING ON BELOW GRADE EXTERIOR SECTIONS OF FOUNDATION WALL OR WITH ANOTHER APPROVED DAMP PROOFING METHOD AS OUTLINED IN R406 OF THE IRC.
- FOUNDATION DRAINAGE SYSTEM IS NOT REQUIRED IF BACKFILLED WITH WELL-DRAINING BACKFILL OR SAND-GRAVEL MIXTURE SOILS OF GROUP 1 SOILS OF THE UNIFIED SOILS CLASSIFICATION SYSTEM AS SHOWN IN TABLE R405.1 OF THE IRC.
- ALL CONCRETE WALLS THAT RETAIN EARTH AND ANY FOUNDATION WALLS THAT ENCLOSE USABLE AREAS WITH GROUP II-GROUP IV SOILS OF THE UNIFIED SOILS CLASSIFICATIONS SYSTEM AS SHOWN IN TABLE R405.1 OF THE IRC SHALL HAVE A FOUNDATION DRAIN INSTALLED CONSISTING OF A PERFORATED DRAIN PIPE NOT LESS THAN 1' BEYOND THE OUTSIDE EDGE OF THE FOOTINGS AND 6" ABOVE THE TOP OF FOOTING WITH A GRAVEL DRAIN WRAPPED IN AN APPROVED FILTER FABRIC.
- ANY FOUNDATION WALLS THAT ENCLOSE USABLE SPACE WITH A HIGH WATER TABLE OR OTHER SEVERE GROUND WATER CONDITIONS SHALL BE WATERPROOFED AS REQUIRED IN SECTION R406.2 OF THE IRC.
- WPE ASSUMES STABLE SOIL CONDITIONS. CONTACT ENGINEER IF SOIL CONDITIONS DIFFER FROM THOSE ASSUMED. SEE DESIGN CRITERIA FOR ASSUMED VALUES. THESE VALUES SHALL BE REPLACED BY DATA INCLUDED IN A SITE SPECIFIC GEOTECHNICAL REPORT IF AVAILABLE.
- CRUSHED ROCK OR GRAVEL FILL WITH RELATIVELY LOW AMOUNTS OF FINES MAY BE USED TO BRING BOTTOM OF FOOTINGS OR SLABS UP TO GRADE WITH A MAXIMUM GRAVEL FILL DEPTH OF 2'. GRAVEL OR CRUSHED ROCK FILLS SHALL BE COMPACTED USING A VIBRATORY PLATE COMPACTOR.
- ANY FILL SOILS OR GRAVEL FILL DEEPER THAN 2' THAT SUPPORT FOOTINGS AND FOUNDATIONS SHALL BE DESIGNED BY A LICENSED GEOTECHNICAL ENGINEER. FILL SOILS SHALL BE INSTALLED, AND TESTED IN ACCORDANCE WITH ACCEPTED ENGINEERING PRACTICE.
- WHERE QUANTIFIABLE DATA OR OBSERVATIONS INDICATE EXPANSIVE, COMPRESSIBLE, SHIFTING, OR OTHER QUESTIONABLE SOIL CHARACTERISTICS OR GEOTECHNICAL HAZARDS ARE LIKELY TO BE PRESENT, THE BUILDING OFFICIAL SHALL DETERMINE WHETHER TO REQUIRE A SITE SPECIFIC GEOTECHNICAL STUDY TO DETERMINE SOIL CHARACTERISTICS OF THE SITE.
- FROST DEPTH OF FOOTINGS AND MINIMUM FREEBOARD OF FOUNDATION WALLS SHALL BE MET AS SPECIFIED ON SHEET S1.0. NO FOOTINGS IN UNCONDITIONED SPACE SHALL BE CONSTRUCTED SHALLOWER THAN THE MINIMUM FROST DEPTH.
- CONCRETE SHALL BE MECHANICALLY VIBRATED WHEN PLACED TO AVOID HONEYCOMBING ALONG FORMS AND TO HELP CONCRETE FREELY FLOW AROUND REINFORCEMENT.
- CONCRETE SHALL NOT BE DROPPED MORE THAN 5' MAXIMUM DURING PLACEMENT.
- CONCRETE FOR FOUNDATION WALLS SHALL CURE A MINIMUM OF 7 DAYS AND HAVE INTERIOR SLAB INSTALLED PRIOR TO ANY BACKFILL. FOUNDATION WALLS 6' IN HEIGHT AND ABOVE DESIGNED FOR TOP SUPPORT. CONTRACTOR SHALL INSTALL FLOOR OR ROOF DIAPHRAGM PRIOR TO BACKFILL AND SHALL NOT COMPACT ANY BACKFILL PLACED AROUND THESE WALLS.
- ALL FOUNDATIONS SHALL HAVE 6" MIN. EXPOSED ABOVE GRADE.
- CONTRACTOR SHALL ROUGHEN COLD JOINT BETWEEN FOOTING AND WALL TO ¼" AMPLITUDE.
- ALL SLABS ON GRADE SHALL HAVE CONTROL JOINTS IN SLAB AT 15' O.C. MAXIMUM SPACING.
- ALL CONCRETE SLABS ON GRADE SHALL BE A MINIMUM OF 4" THICK ON 4" PLATE COMPACTED GRAVEL OR OTHER APPROVED FREE DRAINING MATERIAL.
- REINFORCING STEEL IN CONCRETE SHALL MEET THE REQUIREMENTS OF THE FOLLOWING SECTION ENTITLED "REINFORCING STEEL".
- ALL REINFORCEMENT IN CONCRETE SHALL BE PROPERTY TIED AND SECURED PRIOR TO POURING CONCRETE IN SUCH A WAY THAT REINFORCEMENT REMAINS IN DESIGNED LOCATION. VERTICAL REINFORCING STEEL FOR MASONRY CONSTRUCTION MAY BE FLOATED INTO PLACE.
- ANY COMPONENTS THAT ARE CAST IN PLACE SHALL BE SECURELY PLACED IN THE FORMS (I.E. STRAPS, BOLTS, SLEEVES, ETC.)
- REINFORCEMENT IN FOUNDATION WALLS SHALL BE CENTERED IN WALL U.N.O. REINFORCEMENT FOR CONCRETE WALLS RETAINING EARTH SHALL BE PLACED WHERE DESIGNED ON PLANS.
- ENGINEER ASSUMES 2,500 PSI COMPRESSIVE STRENGTH IN STRUCTURAL CONCRETE, THEREFORE CONCRETE FOR FOOTINGS, FOUNDATION WALLS, AND SLABS ON GRADE CAN BE EXEMPT FROM SPECIAL INSPECTIONS ACCORDING TO EXEMPTIONS LISTED IN SECTION 1705.3 IN THE IBC UNLESS NOTED OTHERWISE.

CONCRETE SPECIFICATIONS

STRUCTURAL ELEMENT	MIN. COMRESSIVE STRENGTH (f _c)	AIR CONTENT	W/C RATIO
FOUNDATION WALLS AND FOOTINGS, NOT EXPOSED TO WEATHER	3000 PSI	5%-7% ⁽¹⁾	.55
SLABS (EXCLUDING GARAGE SLABS)	3000 PSI	5%-7% ⁽¹⁾	.55
WALLS, EXPOSED TO WEATHER	3000 PSI	5%-7%	.45
SLABS EXPOSED TO WEATHER (INCLUDING GARAGE AND SUSP SLABS)	3500 PSI	5%-7%	.45

NOTES TO TABLE ABOVE:

- AIR ENTRAINMENT ONLY REQUIRED IN CONCRETE NOT EXPOSED TO WEATHER IF EXPOSED TO FREEZE/THAW DURING CONSTRUCTION PROCESS.
- f_c IS CONCRETE COMPRESSIVE STRENGTH AT 28-DAYS
- PORTLAND CEMENT TYPE I/II
- W/C RATIO BASED ON ALL CEMENTITIOUS AND SUPPLEMENTARY CEMENTITIOUS MATERIAL IN CONCRETE MIXTURE.
- CONCRETE SHALL NOT INCLUDE CALCIUM CHLORIDE ADMIXTURE
- NOMINAL MAXIMUM AGGREGATE SIZE OF ¾" AND SHALL CONFORM TO ASTM C33
- CONCRETE MIXTURE MAY HAVE A MAXIMUM OF 25% BY MASS OF FLY ASH OR OTHER NATURAL POZZOLANS CONFORMING TO ASTM C618
- SEE SECTION R404.1.3.3.4 (IRC 2021) FOR SLUMP REQUIREMENTS. SLUMP OF CONCRETE SHALL BE ADEQUATE TO PROVIDE WORKABILITY AROUND REINFORCEMENT.

ANCHOR BOLTS

NOTES:

- ANCHORING OF SILL PLATES TO FOUNDATION SHALL FOLLOW SECTION 2308.3 (IBC 2021)
- ANCHOR BOLTS SHALL BE A MINIMUM OF ½" DIAMETER X 10" LONG "J" BOLTS @ 32" O.C. ANCHOR BOLTS SHALL BE GRADE A307 AND SHALL HAVE 7" MINIMUM EMBEDMENT IN CONCRETE. SEE SHEAR WALL SCHEDULE FOR SHEAR WALL SPECIFIC ANCHOR BOLT SPACING.
- ANCHOR BOLTS SHALL BE LOCATED WITHIN THE MIDDLE THIRD OF THE SILL PLATE.
- EACH SECTION OF FOUNDATION WALL SHALL HAVE A MINIMUM OF (2) ANCHOR BOLTS (ONE ON EACH END). PROVIDE EDGE ANCHOR BOLTS WITHIN FIRST FOOT OF FOUNDATION SECTION WHEN STEPPED.
- PROVIDE 3" X 3" X ½" PLATE WASHER FOR EACH ANCHOR BOLT. DIAGONALLY SLOTTED HOLE IN PLATE WASHER ALLOWED TO BE ⅜" WIDER THAN ANCHOR BOLT DIAMETER NOT TO EXCEED 1 ½" IF A STANDARD CUT WASHER IS PLACED BETWEEN THE PLATE WASHER AND NUT.
- ½" DIA. X 7" LONG SIMPSON TITAN HD BOLTS @ SPACING MATCHING SHEAR WALL SCHEDULE MAY BE SUBSTITUTED FOR ANCHOR BOLT SPECIFICATION ABOVE

REINFORCING STEEL:

NOTES:

- PLACEMENT OF REINFORCING STEEL SHALL MEET REQUIREMENTS OF CHAPTER 25 OF ACI 318-19.
- ALL REINFORCING STEEL SHALL CONFORM TO ASTM A-615 GRADE 60 (F_y = 60 KSI).
- REINFORCING STEEL SHALL NOT BE WELDED UNLESS SPECIFIED ON THE PLANS. REINFORCING STEEL THAT IS WELDED SHALL BE ASTM A706 GRADE 60.
- REINFORCING WELDED WIRE FABRIC SHALL CONFORM TO ASTM STANDARD A-185.
- ALL REINFORCING STEEL DIMENSIONS SHALL BE TO CENTER OF BAR UNLESS DIMENSION IS SPECIFIED AS "CLEAR" OR "CLR" IN WHICH CASE THE DIMENSION IS TO EDGE OF REBAR.
- EDGE DISTANCE, HOOK AND BEND RADII, AND REBAR LAP LENGTHS SHALL MEET THE FOLLOWING REQUIREMENTS ON THIS SHEET AND THE REQUIREMENTS IN THE ACI 318.
- REINFORCING IN FOUNDATION WALLS AND AROUND OPENINGS SHALL MEET REQUIREMENTS OF THE FOUNDATION SCHEDULE SHOWN ON S1.0 AND THE UTAH AMENDMENT TO THE CODE 15A-3-108.
- ON CENTER (O.C.) SPACING SHOWN ON PLANS SHALL BE MAXIMUM SPACING ALLOWABLE.
- BARS SHALL BE LAPPED A MINIMUM OF 40 BAR DIAMETERS (d_b) TO MEET DEVELOPMENT LENGTH. DEVELOPMENT LENGTH ASSUMES UNEPOXIED REBAR AND NORMAL WEIGHT CONCRETE. CONTACT ENGINEER FOR OTHER CONDITIONS IF NEEDED.



REBAR CONCRETE COVERAGE DISTANCES

EXPOSURE CONDITION	BAR SIZE OR MEMBER	REBAR CLR DISTANCE (MIN.)
CAST AGAINST AND PERMANENTLY EXPOSED TO EARTH	ANY	3"
EXPOSED TO WEATHER	#5 AND SMALLER	1-1/2"
	#6 AND LARGER	2"
NOT EXPOSED TO WEATHER OR IN CONTACT WITH GROUND	#14 AND # 18; SLABS, JOISTS, AND WALLS	1-1/2"
	#11 AND SMALLER; SLABS, JOISTS, AND WALLS	3/4"
	ALL SIZE BARS; BEAMS, COLUMNS, AND TENSION TIES	1-1/2"




NOTES TO TABLE ABOVE:

- SEE TABLE 20.5.1.3.1 ACI 318-19
- ALL SLAB ON GRADE REINFORCEMENT SHALL BE CENTERED IN SLAB UNLESS NOTED OTHERWISE

STANDARD HOOK GEOMETRY OF DEFORMED BARS IN TENSION (SEE ACI 318-19 TABLE 25.3.1 FOR ALL BAR SIZES AND REQUIREMENTS)

TYPE OF HOOK	BAR SIZE	MIN. INSIDE DIAMETER	STRAIGHT EXTENSION MIN. (l _{ext})	TYPE OF HOOK
90° HOOK	#3-#8	6d _b	12d _b	
180° HOOK	#3-#8	6d _b	GREATER OF 4d _b and 2.5"	

STANDARD HOOK GEOMETRY FOR STIRRUPS, TIES AND HOOPS (SEE ACI 318-19 TABLE 25.3.2 FOR ALL BAR SIZES AND REQUIREMENTS)

TYPE OF HOOK	BAR SIZE	MIN. INSIDE DIAMETER	STRAIGHT EXTENSION MIN. (l _{ext})	TYPE OF HOOK
90° HOOK	#3-#5	4d _b	GREATER OF 6d _b and 3"	
135° HOOK	#3-#5	4d _b	GREATER OF 6d _b and 3"	
180° HOOK	#3-#5	4d _b	GREATER OF 6d _b and 3"	

NOTES TO TABLE ABOVE:

- A LONGER STRAIGHT EXTENSION IS ALLOWABLE BUT DOES NOT INCREASE ANCHORAGE CAPACITY
- MINIMUM DEVELOPMENT LENGTH SHALL BE 40 BAR DIAMETERS (d_b)




435-515-0126
jackson@whitepineeng.com
tom@whitepineeng.com
P.O. BOX 669
HYDE PARK, UTAH 84318

NO.	DESCRIPTION	DATE

CHRIS FIELD DESIGNS HIBBARD HYDE PARK

378 N 800 E
HYDE PARK, UTAH



DESIGNED BY: J. SAGERS
CHECKED BY: T. HILL
SCALE:
1/8" = 1'-0" (PRINTED ON 11X17)
1/4" = 1'-0" (PRINTED ON 22X34)

SHEET TITLE:

STRUCTURAL NOTES AND SCHEDULES

SD3

MINIMUM NAILING SCHEDULE (IBC 2304.10.2)					
No.	BUILDING ELEMENT	No.	SIZE	SPACING	LOCATION
1.1	BLOCKING BETWEEN CEILING JOISTS, RAFTERS, OR TRUSSES TO TOP PLATE OR OTHER FRAMING BELOW	(4)	8d	-	EACH END, TOENAIL
1.2	BLOCKING BETWEEN RAFTERS OR TRUSS NOT AT THE WALL TOP PLATE, TO RAFTER OR TRUSS	(2)	16d	-	END NAIL
8	STUD TO STUD (NOT AT BRACED WALL PANELS)	-	16d	24" O.C.	FACE NAIL
9	STUD TO STUD AND ABUTTING STUDS AT INTERSECTING WALL CORNERS (AT BRACED WALL PANELS)	-	16d	12" O.C.	FACE NAIL
10	BUILT-UP HEADER (2" TO 2" HEADER)	-	16d	12" O.C.	EACH EDGE, FACE NAIL
11	CONTINUOUS HEADER TO STUD	(5)	8d	-	TOENAIL
12	TOP PLATE TO TOP PLATE	-	16d	16" O.C.	FACE NAIL
13	TOP PLATE TO TOP PLATE, AT END JOINTS (MINIMUM 24" LAP SPLICE LENGTH EACH SIDE OF END JOINT)	(12)	16d	-	EACH SIDE OF END JOINT, FACE NAIL
14	BOTTOM PLATE TO JOIST, RIM JOIST, BAND JOIST OR BLOCKING (NOT AT BRACE WALL PANELS)	-	16d	12" O.C.	FACE NAIL
15	BOTTOM PLATE TO JOIST, RIM JOIST, BANDS JOIST, OR BLOCKING AT BRACE WALL PANELS	(3)	16d	16" O.C.	FACE NAIL
16	STUD TO TOP OR BOTTOM PLATE	(2)	16d	-	END NAIL
17	TOP PLATES, LAPS AT CORNERS AND INTERSECTIONS	(2)	16d	-	FACE NAIL
21	JOIST TO SILL, TOP PLATE, OR GIRDER	(4)	8d	-	TOENAIL
22	RIM JOIST, BAND JOIST, OR BLOCKING TO TOP PLATE, SILL, OR OTHER FRAMING BELOW	-	8d	4" O.C.	TOENAIL
26	BUILT-UP GIRDERS AND BEAMS, 2" LUMBER LAYERS	(2)	16d	12" O.C.	FACE NAIL
28	JOIST TO BAND JOIST OR RIM JOIST	(3)	16d	-	END NAIL
29	BRIDGING OR BLOCKING TO JOIST, RAFTER, OR TRUSS	(2)	8d	-	EACH END, TOENAIL

LOCATIONS REQUIRING PRESERVATIVE-TREATED OR NATURALLY DURABLE WOOD

- NOTES:
- WOOD JOISTS/FLOORS CLOSER THAN 18" AND WOOD GIRDERS CLOSER THAN 12" TO EXPOSED GROUND IN CRAWL SPACES OR UNEXCAVATED AREAS WITHIN THE PERIMETER OF THE BUILDING FOUNDATION.
 - WOOD FRAMING MEMBERS IN CONTACT W/ THE EXTERIOR FOUNDATION WALLS AND ARE LESS THAN 8" FROM EXPOSED EARTH.
 - WOOD FRAMING MEMBERS AND FURRING STRIPS IN DIRECT CONTACT W/ MASONRY OR CONCRETE.
- *WOOD USED IN THE LOCATIONS SPECIFIED SHALL BE NATURALLY DURABLE OR PRESERVATIVE-TREATED IN ACCORDANCE W/ AWPA U1.
- **FASTENERS INCLUDING NUTS AND WASHERS, IN CONTACT WITH PRESERVATIVE-TREATED WOOD SHALL BE OF HOT-DIPPED ZINC-COATED GALVANIZED STEEL, STAINLESS STEEL, SILICON BRONZE OR COPPER. STAPLES SHALL BE OF STAINLESS STEEL. FASTENERS OTHER THAN NAILS, STAPLES, TIMBER RIVETS, WOOD SCREWS AND LAG SCREWS SHALL BE PERMITTED TO BE OF MECHANICALLY DEPOSITED ZINC-COATED STEEL.

SHEAR WALL SCHEDULE								
MARK	SHEATHING	EDGE NAILING	EDGE STAPLING	EDGE MEMBER	FIELD NAILING	FIELD STAPLING	FIELD MEMBER	ANCHOR BOLT SPACING
SW-6"	7/16" OSB, 1 SIDE	8d @ 6" O.C.	1-1/2" LONG 16 GAUGE @ 3" O.C.	(1) 2X	8d @ 12" O.C.	1-1/2" LONG 16 GAUGE @ 6" O.C.	(1) 2X	1/2" DIA X 10" L @ 32" O.C.
SW-4"	7/16" OSB, 1 SIDE	8d @ 4" O.C.	1-1/2" LONG 16 GAUGE @ 2" O.C.	(1) 3X OR (2) 2X W/ 16d @ 4" O.C.	8d @ 12" O.C.	1-1/2" LONG 16 GAUGE @ 6" O.C.	(1) 2X	1/2" DIA X 10" L @ 32" O.C.
SW-3"	7/16" OSB, 1 SIDE	8d @ 3" O.C.	N/A	(1) 3X OR (2) 2X W/ 16d @ 4" O.C.	8d @ 12" O.C.	N/A	(1) 2X	1/2" DIA X 10" L @ 24" O.C.
SW-2"	7/16" OSB, 1 SIDE	8d @ 2" O.C.	N/A	(1) 3X OR (2) 2X W/ 16d @ 3" O.C.	8d @ 12" O.C.	N/A	(1) 2X	1/2" DIA X 10" L @ 16" O.C.
(2)SW-4"	7/16" OSB, BOTH SIDES	8d @ 4" O.C.	1-1/2" LONG 16 GAUGE @ 2" O.C.	(1) 3X OR (2) 2X W/ 16d @ 4" O.C.	8d @ 12" O.C.	1-1/2" LONG 16 GAUGE @ 6" O.C.	(1) 2X	1/2" DIA X 10" L @ 16" O.C.
(2)SW-3"	7/16" OSB, BOTH SIDES	8d @ 3" O.C.	N/A	(1) 3X OR (2) 2X W/ 16d @ 4" O.C.	8d @ 12" O.C.	N/A	(1) 2X	1/2" DIA X 10" L @ 12" O.C.
(2)SW-2"	7/16" OSB, BOTH SIDES	8d @ 2" O.C.	N/A	(1) 3X OR (2) 2X W/ 16d @ 3" O.C.	8d @ 12" O.C.	N/A	(1) 2X	1/2" DIA X 10" L @ 8" O.C.

- NOTES TO TABLE ABOVE:
- STUDS SHALL BE DF-L @ 16" O.C.
 - NAILS SHALL BE CARBON STEEL SMOOTH SHANK 8d COMMON OR 8d GALVANIZED BOX. GALVANIZED NAILS SHALL BE HOT-DIPPED OR MECHANICALLY DEPOSITED.
 - STAPLES SHALL HAVE A MINIMUM CROWN WIDTH OF 7/16" AND SHALL BE INSTALLED WITH THEIR CROWNS PARALLEL TO THE LONG DIMENSION OF THE FRAMING MEMBERS.
 - NAILS/STAPLES SHALL BE DRIVEN WITH THE HEAD/CROWN OF THE NAIL/STAPLE FLUSH WITH THE SURFACE OF THE SHEATHING.
 - DOUBLE SIDED SHEAR WALLS SHALL HAVE PANEL JOINTS OFFSET TO FALL ON DIFFERENT FRAMING MEMBERS. NAILS AT PANEL EDGES SHALL BE STAGGERED.
 - BLOCK ALL PANEL EDGES. FLAT BLOCKING IS ACCEPTABLE ON SINGLE SIDED SHEAR WALLS.
 - ALL WALLS SHALL FOLLOW SW-6" U.N.O.
 - STRUCTURAL PANELS SHALL BE APA APPROVED, EXPOSURE 1, AND MEET THE REQUIREMENTS OF USDOC PS 2.
 - NAILS SHALL BE LOCATED AT LEAST 3/8" FROM THE PANEL EDGES.
 - PANELS SHALL NOT BE LESS THAN 4'X8' EXCEPT AT BOUNDARIES AND CHANGES IN FRAMING. ALL EDGES OF ALL PANELS SHALL BE SUPPORTED BY AND FASTENED TO FRAMING MEMBERS OR BLOCKING.
 - ANCHOR BOLTS SHALL HAVE A STEEL PLATE WASHER UNDER EACH NUT NOT LESS THAN 0.229"X3"X3" IN SIZE. THE HOLE IN THE PLATE WASHER SHALL BE PERMITTED TO BE DIAGONALLY SLOTTED WITH A WIDTH OF UP TO 3/16" LARGER THAN THE BOLT DIAMETER AND A SLOT LENGTH NOT TO EXCEED 1-3/4", PROVIDED A STANDARD CUT WASHER IS PLACED BETWEEN THE PLATE WASHER AND THE NUT. THE PLATE WASHER SHALL EXTEND TO WITHIN 1/2" OF THE EDGE OF THE. BOTTOM PLATE ON THE SIDE(S) WITH SHEATHING.

FRAMING

- NOTES:
- FULL HEIGHT SOLID BLOCKING REQUIRED AT ALL BEARING POINTS OF TRUSSES, RAFTERS, AND JOISTS.
 - WALLS SHALL BE BALLOON FRAMED (CONTINUOUS STUDS FROM FOUNDATION TO ROOF) EXCEPT WHERE LATERALLY SUPPORTED BY A FLOOR OR ROOF DIAPHRAGM.
 - ALL LUMBER SHALL MEET PLANS SPECIFICATIONS AND BE GRADED AND STAMPED BY AN APPROVED AGENCY (I.E. APA, WWPA, ETC.)
 - BEAMS ON PLAN ARE SIZED AS A MINIMUM. LARGER SIZES AND HIGHER GRADES MAY REPLACE MEMBERS ON PLAN.
 - FLOOR BEAMS MAY BE FLUSH MOUNTED OR DROP BEAMS.
 - BEAMS CONSISTING OF (4) OR MORE PLYS SHALL BE FASTENED W/ (2) ROWS OF 1/2" DIA THRU BOLTS @ 12" O.C. 2" FROM TOP AND 2" FROM BOTTOM OF BEAM.
 - HOLES FOR BOLTS SHALL BE A MINIMUM OF 1/32" TO A MAXIMUM OF 1/16" LARGER THAN THE BOLT DIAMETER. A STANDARD CUT WASHER SHALL BE PROVIDED BETWEEN THE WOOD AND THE BOLT HEAD AND BETWEEN THE WOOD AND THE NUT.
 - LEAD HOLES FOR LAG SCREWS SHALL BE BORED AS FOLLOWS
 - THE CLEARANCE HOLE FOR THE THE SHANK SHALL HAVE THE SAME DIAMETER AS THE SHANK AND THE SAME DEPTH OF PENETRATION AS THE LENGTH OF UNTHREADED SHANK.
 - THE LEAD HOLE FOR THE THREADED PORTION SHALL HAVE A DIAMETER EQUAL TO 40%-70% OF THE SHANK DIAMETER AND A LENGTH EQUAL TO AT LEAST THE LENGTH OF THE THREADED PORTION. THE LARGER PERCENTILE SHALL APPLY TO LAG SCREWS OF GREATER DIAMETERS.
 - POSTS AND WALLS SHALL BE CENTERED ON CONTINUOUS AND SPOT FOOTINGS U.N.O.
 - SQUASH BLOCKING AND LOWER COLUMNS SHALL BE PROVIDED TO CARRY ALL COLUMN LOADS TO FOOTINGS AND FOUNDATIONS. SQUASH BLOCKING AND LOWER COLUMNS SHALL BE ALIGNED W/ AND MATCH UPPER COLUMN SIZE U.N.O.
 - BUILT UP 2X COLUMNS SHALL BE FACE NAILED TOGETHER W/ 16d @ 4" O.C STAGGERED EACH PLY.
 - COLUMNS SHALL SUPPORT FULL WIDTH OF BEAM ENDS.
 - ENGINEERED WOOD RIM BOARDS SHALL CONFORM TO ANSI/APA PRR 410 OR SHALL BE EVALUATED IN ACCORDANCE W/ ASTM D7672.
 - WHERE THE DBL TOP PLATE LAP AND NAILING REQUIREMENTS PER IBC2304.10.2 No. 13 ARE NOT MET, PROVIDE #CS16 W/ 12" LAP MIN.
 - WOOD CONSTRUCTION CONNECTORS SHALL BE INSTALLED PER THE MANUFACTURER'S SPECIFICATIONS.

TRUSS AND JOIST

- NOTES:
- PRE-MANUFACTURED TRUSSES SHALL FOLLOW LAYOUT SHOWN ON PLANS. ANY CHANGES IN TRUSS LAYOUT SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
 - CONTRACTOR AND MANUFACTURER SHALL VERIFY CEILING HEIGHTS, TRAYS, VAULTS, AND STEPS PRIOR TO CONSTRUCTION.
 - MULTI PLY TRUSSES OR JOISTS SHALL BE FASTENED PER MANUFACTURER'S SPECIFICATIONS.
 - TRUSSES AND JOISTS SHALL BE BRACED PER MANUFACTURER.
 - PROVIDE WEB STIFFENERS ON JOISTS WHEN REQUIRED BY MANUFACTURER.
 - NO ALTERATIONS OF TRUSSES OR JOISTS ARE ALLOWED WITHOUT APPROVAL FROM MANUFACTURER.
 - PROVIDE HURRICANE TIE EACH END OF EVERY ROOF TRUSS/RAFTER TO TOP PLATE.
 - #H2.5A OR #H1 FOR STANDARD TRUSSES AND BEVELED RAFTERS
 - #H1 OR #H10A FOR ATTIC AND TALL HEEL TRUSSES
 - #VPA_ FOR NON BEVELED RAFTERS

STEEL

- NOTES:
- W SECTIONS SHALL COMPLY W/ ASTM A992 AND HAVE Fy=50 KSI MIN. AND Fu=65 KSI MIN.
 - HSS RECTANGULAR SECTIONS SHALL COMPLY W/ ASTM A500 GRADE C AND HAVE Fy=50 KSI MIN. AND Fu=62 KSI MIN.
 - C AND L SECTION SHALL COMPLY W/ ASTM A36 AND HAVE Fy=36 KSI MIN. AND Fu=58 KSI MIN.
 - ALL WELDS ARE 1/4" FILLET CONFORMING TO THE REQUIREMENTS IN AWS D1.1 W/ AN ELECTRODE Fexx=70 KSI U.N.O.
 - ALL STRUCTURAL STEEL BOLTS SHALL COMPLY W/ A307 GRADE A AND HAVE Fnt=45 KSI AND Fnv=27 KSI U.N.O.
 - ALL WIDE FLANGE BEAMS SHALL HAVE 3/8" WEB STIFFENER EACH SIDE AT BEARING LOCATIONS U.N.O.
 - WHERE LEVELING NUTS ARE USED UNDER BASE PLATES, NON SHRINK GROUT SHALL FILL THE VOID BETWEEN CONCRETE AND STEEL. GROUT SHALL BE RATED FOR 5000 PSI MIN.
 - WOOD NAILERS ON BEAMS SHALL BE 2X OR 3X W/ 1/2" DIA BOLTS SPACED AT 32" O.C. MIN.

EPOXY

- NOTES:
- EPOXY SHALL BE SIMPSON SET-XP U.N.O.
 - DRILL AND CLEAN HOLE PER MANUFACTURER SPECIFICATIONS.
 - HOLE SHALL BE FREE OF DUST, DEBRIS, AND STANDING WATER PRIOR TO EPOXY INSTALLATION.

DIAPHRAGM/SHEATHING SCHEDULE				
LOCATION	NOMINAL THICKNESS	SPAN RATING	EDGE NAILING	FIELD NAILING
ROOF W/ DESIGN SNOW LOAD UP TO 40 PSF	7/16"	24/16	8d @ 6" O.C.	8d @ 12" O.C.
ROOF W/ DESIGN SNOW LOAD UP TO 120 PSF	19/32"	40/20	8d @ 6" O.C.	8d @ 12" O.C.
FLOOR	3/4" TONGUE AND GROOVE	48/24	10d @ 6" O.C.	10d @ 12" O.C.

- NOTES TO TABLE ABOVE:
- ROOF AND FLOOR FRAMING MEMBERS SHALL BE PLACED NO FURTHER THAN 24" O.C.
 - NAILS SHALL BE CARBON STEEL SMOOTH SHANK COMMON OR GALVANIZED BOX. GALVANIZED NAILS SHALL BE HOT-DIPPED OR MECHANICALLY DEPOSITED.
 - NAILS SHALL BE DRIVEN WITH THE HEAD OF THE NAIL FLUSH WITH THE SURFACE OF THE SHEATHING.
 - STRUCTURAL PANELS SHALL BE APA APPROVED, EXPOSURE 1, AND MEET THE REQUIREMENTS OF USDOC PS 2.
 - FLOOR SHEATHING SHALL BE GLUED TO FRAMING MEMBERS PRIOR TO NAILING W/ AN ADHESIVE CONFORMING TO APA SPECIFICATIONS.
 - STRENGTH AXIS (LONG DIRECTION) OF PANELS SHALL BE ORIENTED PERPENDICULAR TO FRAMING MEMBERS AND PANEL END JOINTS SHALL BE STAGGERED.
 - NAILS SHALL BE LOCATED AT LEAST 3/8" FROM THE EDGES OF PANELS.
 - 1-1/2" LONG 16 GAGE STAPLES W/ 7/16" CROWN MAY BE SUBSTITUTED FOR 8d NAILS AT HALF THE SPACING FOR 7/16" PANELS ONLY. CROWNS MUST BE INSTALLED PARALLEL TO FRAMING MEMBERS.
 - PANELS SHALL NOT BE LESS THAN 4'X8' EXCEPT AT BOUNDARIES AND CHANGES IN FRAMING WHERE MINIMUM PANEL DIMENSION SHALL BE 24" UNLESS ALL EDGES OF THE UNDERSIZED PANELS ARE SUPPORTED BY AND FASTENED TO FRAMING MEMBERS OR BLOCKING.

STUD HEIGHT SCHEDULE		
SIZE/TYPE	SPACING	MAX HEIGHT
2X4 DF-L #2	16" O.C.	10'-0"
2X4 DF-L #2	12" O.C.	12'-0"
2X6 DF-L #2	16" O.C.	14'-0"
2X6 DF-L #2	12" O.C.	16'-0"
2X6 DF-L #2	8" O.C.	18'-0"
2X6 LSL	16" O.C.	16'-0"
2X6 LSL	12" O.C.	18'-0"

- NOTES TO TABLE ABOVE:
- CONTACT ENGINEER FOR OTHER STUDS AND SPACING.
 - 2X6 LSL STUDS SHALL BE 1-3/4" X 5-1/2" W/ E=1.55X10^6 PSI MIN.

CHIMNEY FRAMING

- NOTES:
- PROVIDE STUDS SIZED FROM STUD HEIGHT SCHEDULE USING THE DISTANCE FROM ROOF SHEATHING TO TOP OF CHIMNEY AND 1/2 THE MAX HEIGHT SHOWN ON SCHEDULE.
 - SHEET ALL CHIMNEY SIDES PER SW-6" SCHEDULE U.N.O.
 - HORIZONTAL STRAP CHIMNEY TO ROOF BLOCKING BETWEEN TRUSS TOP CHORDS OR TO TRUSS TO CHORD W/ #CS16 W/ 12" LAP EACH CORNER EACH DIRECTION.
 - TRUSSES SHALL BE DESIGNED TO CARRY VERTICAL LOADS FROM CHIMNEY.
 - (3) STUDS SHALL BE PROVIDE AT EACH CORNER OF THE CHIMNEY.
 - STUDS MAY BE SPLICED WITH FULL LENGTH STUDS FACE NAILED TOGETHER W/ 16d @ 6" O.C. STAGGERED.
 - IF CHIMNEY FRAMING DOES NOT EXTEND FROM TOP OF CHIMNEY TO FLOOR, THEN 2X DEAD MAN BLOCKS MAY BE LAID FLAT ON ROOF SHEATHING AND EDGE NAILED PER SW-6" AND #CS16 VERTICAL STRAPS W/ 12" LAP SHALL BE PLACED AT EACH CORNER DOWN AROUND (2)2X6 X 8' BLOCKING (EXTENDING UNDERNEATH 4 TRUSS TOP CHORDS) AND BACK UP TO NAIL ONTO OTHER SIDE OF CORNER STUDS.
 - CHIMNEY WALLS SHALL NOT EXCEED 3.5:1 HEIGHT TO WIDTH RATIO.

Reviewed for Code Compliance
Hyde Park Building Dept
10/24/2023



WHITE PINE ENGINEERING
- CIVIL STRUCTURAL -
www.whitepineeng.com


435-515-0126
jackson@whitepineeng.com
tom@whitepineeng.com

P.O. BOX 669
HYDE PARK, UTAH
84318

NO.	DESCRIPTION	DATE

CHRIS FIELD DESIGNS HIBBARD HYDE PARK

378 N 800 E
HYDE PARK, UTAH



DESIGNED BY: J. SAGERS
CHECKED BY: T. HILL

SCALE:
1/8" = 1'-0" (PRINTED ON 11X17)
1/4" = 1'-0" (PRINTED ON 22X34)

SHEET TITLE:

STRUCTURAL NOTES
AND SCHEDULES

SD4